

LEF Series


Slider Type

Step Motor (Servo/24 VDC) Servo Motor (24 VDC) Type

Ball Screw Drive LEFS Series

Size: 16, 25, 32, 40 ▶Page 38

Max. work load: **65 kg** Max. speed: **1200 mm/s**
Positioning repeatability: ± 0.015 mm (High precision type)
Clean room specification also available

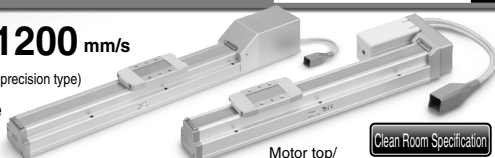

Motor top/
parallel type

Clean Room Specification

▶Page 38

11-LEFS

Belt Drive LEFB Series

Size: 16, 25, 32 ▶Page 38

Max. stroke: **2000 mm**
Max. speed: **2000 mm/s**



AC Servo Motor Type

* Not applicable to UL.

Ball Screw Drive LEFS Series

Size: 25, 32, 40 ▶Page 46

Positioning repeatability: ± 0.01 mm (High precision type)
Improved high speed transfer ability Max. speed: **1500 mm/s**
High acceleration/deceleration: **20000 mm/s²**
Pulse input type
With internal absolute encoder (For LECSB/C/S)
Clean room specification also available



Motor top/
parallel type

Clean Room Specification


▶Page 46

11-LEFS

Belt Drive LEFB Series

Size: 25, 32, 40 ▶Page 54

Max. speed: **2000 mm/s**
Max. stroke: **3000 mm**
Max. acceleration/deceleration: **20000 mm/s²**
Motor bottom mounting type also available

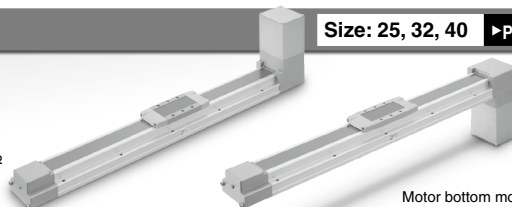

Motor bottom mounting type

Step Motor (Servo/24 VDC)

Controller/
Driver

Servo Motor (24 VDC)

▶Page 547

- ▶Step data input type
LECP6/LECA6 Series (64 points positioning)
- ▶CC-Link direct input type
LECPMJ[®] Series
- ▶Programless type
LECP1 Series (14 points positioning)
- ▶Pulse input type
LECPA Series

* Not applicable to CE.



AC Servo Motor Driver

▶Pages 607, 629, 659

- * Not applicable to UL.
- ▶For absolute encoder
 - Pulse input type
LECSB Series
 - CC-Link direct input type
LECSA Series
 - SSCNET III type
LECSS Series
 - SSCNET III/H type
LECSST Series
 - MECHATROLINK type
LECY[□] Series

- ▶For incremental encoder
 - Pulse input type/
Positioning type
LECSA Series



LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC□

LEC

□

LEC

SS-T

LEC

Y□

Motor-

less

LAT

LZ□


LC3F2

LEF Series

●Compact


Height/width dimensions reduced by approx. **50%**

* Compared with SMC LJ1 series
(Work load: 10 kg)

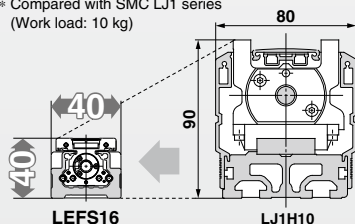

●Easy mounting of the body/Reduction in installation labor

Possible to mount the main body without removing the external cover etc.



Equipped with seal bands as standard

Covers the guide, ball screw and belt.
Prevents grease from splashing and external foreign matter from entering.

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)


Ball Screw Drive/LEFS Series Size: 16, 25, 32, 40

Model	Lead [mm]			Max. speed [mm/s]*
				Step motor (Servo/24 VDC)
LEFS16	—	10	5	700 (For lead 10)
LEFS25	20	12	6	1100 (For lead 20)
LEFS32	24	16	8	1200 (For lead 24)
LEFS40	30	20	10	1200 (For lead 30)

* Except LECPA

Max. work load: **65 kg**

Positioning repeatability: ± 0.02 mm
(± 0.01 mm for LEFSH)

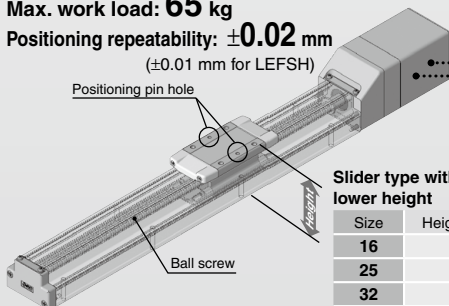

Positioning pin hole

Ball screw


Slider type with lower height

Size	Height [mm]
16	40
25	48
32	60
40	68

Motor parallel type available!

○ Motor mounting position can be selected from two directions (Right or Left).

○ Top surface of table and motor are level.



Non-magnetizing lock mechanism (Option)

Drop prevention in case of power failure (Maintained)*

* The belt drive actuator LEFB cannot be used vertically for applications.


Compatible motors

●Step motor (Servo/24 VDC)

Ideal for transfer of high load at a low speed

●Servo motor (24 VDC)


Stable at a high speed and silent operation



Belt Drive/LEFB Series Size: 16, 25, 32

Max. stroke: **2000** mm

Max. speed: **2000** mm/s

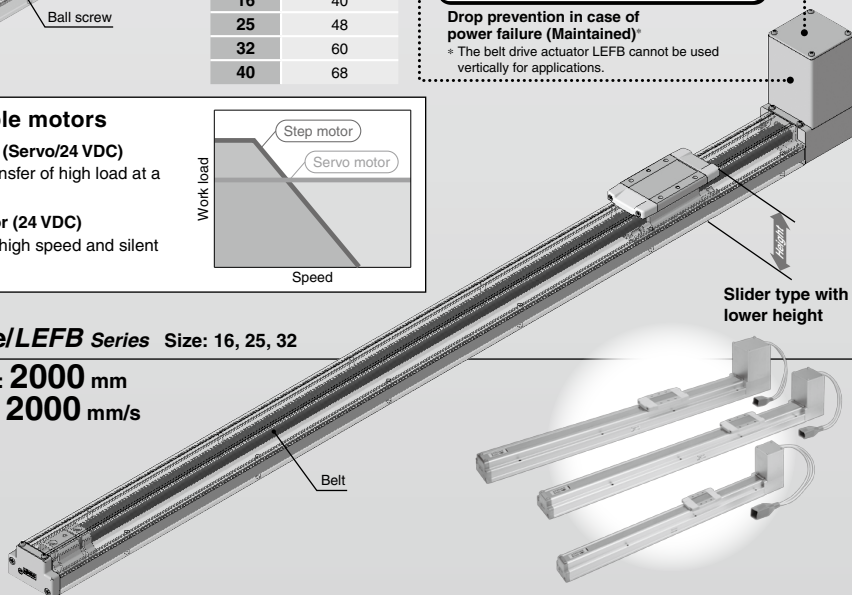



Slider type with lower height

AC Servo Motor

Ball Screw Drive/LEFS Series Size: 25, 32, 40

Model	Lead [mm]			Max. speed [mm/s]
				AC servo motor
LEFS25	20	12	6	1500
LEFS32	24	16	8	1500
LEFS40	30	20	10	1500

High output motor (100/200/400 W)
Improved high speed transfer ability
High acceleration/deceleration
compatible: 20000 mm/s²
Pulse input type
With internal absolute encoder
(For LECB/C/S, LECY)

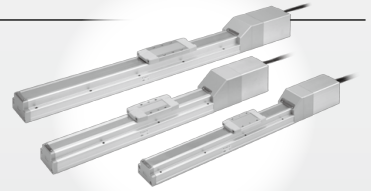



Motor parallel type available!

⊙ Motor mounting position can be selected from two directions (Right or Left).



Belt Drive/LEFB Series Size: 25, 32, 40

Max. speed: **2000** mm/s
Max. stroke: **3000** mm
Max. acceleration/deceleration: **20000** mm/s²

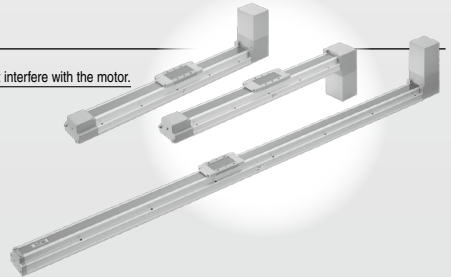


Clean Room Specification

Ball Screw Drive/11-LEFS Series

ISO Class 4^{*1} (ISO14644-1)

- Built-in vacuum piping
- Possible to mount the main body without removing the external cover etc.
- Body-integrated linear guide specification

^{*1} Changes depending on the suction flow rate.
Refer to pages 511 and 512 for details.

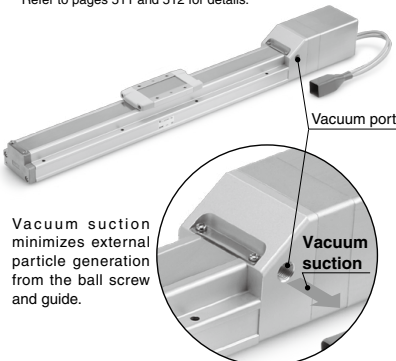


Vacuum suction minimizes external particle generation from the ball screw and guide.

Support Guide/LEFG Series

A support guide is designed to support workpieces with significant overhang.

- As the dimensions are the same as the LEF series body, installation is simple and contributes to a reduction in installation and assembly labor.
- The standard equipped seal bands prevent grease from splashing and external foreign matter from entering.

Application example

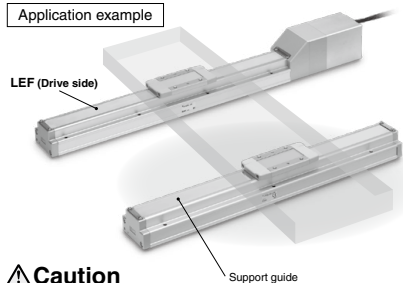

⚠ Caution

After installing the actuator on the drive side, perform the alignment of the support guide. However, when the mounting flatness exceeds 0.1, install a floating mechanism separately on the workpiece installation surface (table).



For details, refer to page 59.

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC□

LEC

S□

LEC

SS-T

LEC

Y□

Motor-



less

LAT

LZ□

LC3F2

Application Examples

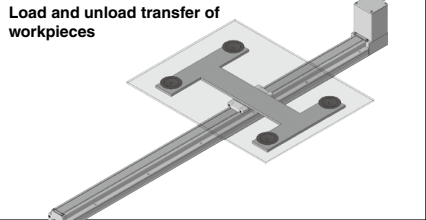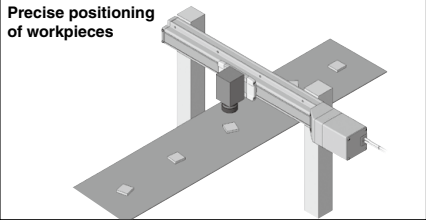

Series Variations

Ball Screw Drive/LEFS Series

Type	Size ^{*1}	Lead [mm]	Stroke [mm] ^{*2}	
Step motor (Servo/24 VDC) Clean room compatible ^{*3}	16	5	50, 100, 150, 200, 250, 300, 350, 400, 450, 500	
		10		
	25	6	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800	
		12		
		20		
	32	8	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000	
		16		
		24		
	40	10	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1100, 1200	
		20		
		30		
Servo motor (24 VDC) Clean room compatible ^{*3}	16	5	50, 100, 150, 200, 250, 300, 350, 400, 450, 500	
		10		
		6		
	25	12	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800	
		20		
AC servo motor Clean room compatible ^{*3}	25	6	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800	
		12		
		20		
	32	8	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000	
		16		
		24		
	40	10	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1100, 1200	
		20		
		30		

*1 The size corresponds to the bore of the air cylinder with an equivalent force. (For the ball screw drive)

*2 Please consult with SMC for non-standard strokes as they are produced as special orders.


*3 For clean room specification, refer to page 510. Except lead 20, 24, 30 mm

Belt Drive/LEFB Series


Type	Size ^{*1}	Equivalent lead [mm]	Stroke [mm] ^{*2}	
Step motor (Servo/24 VDC)	16	48	300, 500, 600, 700, 800, 900, 1000	
	25	48	300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000	
	32	48	300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000	
Servo motor (24 VDC)	16	48	300, 500, 600, 700, 800, 900, 1000	
	25	48	300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000	
AC servo motor	25	54	300, 400, 500, 600, 700, 800, 900, 1000, (1100), 1200, (1300), (1400), 1500, (1600), (1700), (1800), (1900), 2000	
	32	54	300, 400, 500, 600, 700, 800, 900, 1000, (1100), 1200, (1300), (1400), 1500, (1600), (1700), (1800), (1900), 2000, 2500	
	40	54	300, 400, 500, 600, 700, 800, 900, 1000, (1100), 1200, (1300), (1400), 1500, (1600), (1700), (1800), (1900), 2000, 2500, 3000	

Electric Actuator/Slider Type

Pick and place



Vertical transfer

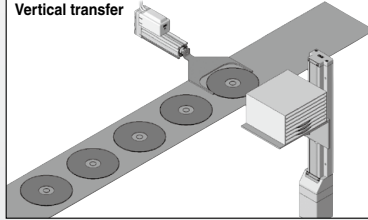

	Work load: Horizontal [kg]						Work load: Vertical [kg]			Speed [mm/s]							Page
	10	20	30	40	50	60	10	20	30	200	400	600	800	1000	1200	1400	
																	38 ⁻³
																	46 ⁻³

	Work load: Horizontal [kg] ⁻³					Speed [mm/s]				Page
	5	10	15	20	25	500	1000	1500	2000	
										38
										54

- *1 The nominal size based on force (equivalent to the air cylinder) during operation with ball screws.
- *2 Please consult with SMC as all non-standard and non-made-to-order strokes are produced as special orders.
- *3 The belt drive actuator cannot be used vertically for applications.

LEF

LEJ

LEL

LEM

LEY

LES

LEPY
LEPS

LER

LEH

LEY
-X5

11-
LEFS

11-
LEJS

25A-

LEC

LEC
S

LEC
SS-T

LEC
Y


Motor-
less

LAT

LZ

LC3F2


Electric Actuator/Slider Type Ball Screw Drive *LEFS Series*

Step Motor (Servo/24 VDC)		Servo Motor (24 VDC)
◎Ball Screw Drive <i>LEFS Series</i>		
	Model Selection	Page 38
	How to Order	Page 62
	Specifications	Page 64
	Construction	Page 66
	Dimensions	Page 68

◎Ball Screw Drive <i>11-LEFS Series</i>		Clean Room Specification
	Model Selection	Page 38
	Particle Generation Characteristics	Page 510
	How to Order	Page 514
	Specifications	Page 516
	Dimensions	Page 518

◎Support Guide/<i>LEFG Series</i>	
	Model Selection
	How to Order
	Dimensions

AC Servo Motor	
◎Ball Screw Drive <i>LEFS Series</i>	
	Model Selection
	How to Order
	Specifications
	Construction
	Dimensions

◎Ball Screw Drive <i>11-LEFS Series</i>		Clean Room Specification
	Model Selection	Page 46
	Particle Generation Characteristics	Page 510
	How to Order	Page 522
	Specifications	Page 523
	Dimensions	Page 524

◎Support Guide/<i>11-LEFG Series</i>		Clean Room Specification
	Model Selection	Page 59
	How to Order	Page 527
	Dimensions	Page 528

Electric Actuator/Slider Type Belt Drive *LEFB Series*

Step Motor (Servo/24 VDC)		Servo Motor (24 VDC)
◎Belt Drive <i>LEFB Series</i>		
	Model Selection	Page 38
	How to Order	Page 90
	Specifications	Page 92
	Construction	Page 94
	Dimensions	Page 95

◎Support Guide/<i>LEFG Series</i>	
	Model Selection
	How to Order
	Dimensions

Specific Product Precautions Page 113

◎Step Motor (Servo/24 VDC)/Servo Motor (24 VDC) Controller/Driver	
Step Data Input Type/ <i>LECP6/LECA6 Series</i>	Page 560
Controller Setting Kit/ <i>LEC-W2</i>	Page 569
Teaching Box/ <i>LEC-T1</i>	Page 570
CC-Link Direct Input Type/ <i>LECPMJ Series</i>	Page 600
Controller Setting Kit/ <i>LEC-W2</i>	Page 604
Teaching Box/ <i>LEC-T1</i>	Page 605
Gateway Unit/ <i>LEC-G Series</i>	Page 572
Programless Controller/ <i>LECP1 Series</i>	Page 576
Pulse Input Type/ <i>LECPA Series</i>	Page 590
Controller Setting Kit/ <i>LEC-W2</i>	Page 597
Teaching Box/ <i>LEC-T1</i>	Page 598



AC Servo Motor	
◎Belt Drive <i>LEFB Series</i>	
	Model Selection
	How to Order
	Specifications
	Construction
	Dimensions

◎AC Servo Motor Driver	
<i>LECSA/LECSB/</i>	
<i>LECSC/LECSS Series</i>	Page 607
<i>LECSS-T Series</i>	Page 629
<i>LECYM/LECYU Series</i>	Page 659



Slider Type

Ball Screw Drive *LEFS Series*


Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)




Clean Room Specification

11-LEFS Series

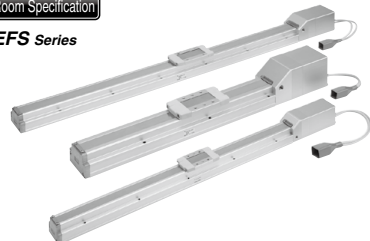


AC Servo Motor

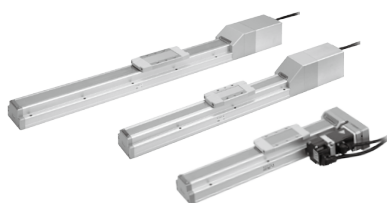


Clean Room Specification

11-LEFS Series

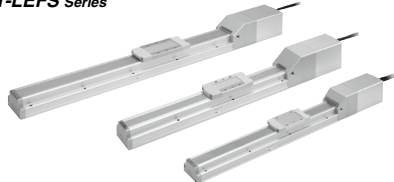

Support Guide


LEFG Series



Support Guide

Clean Room Specification


11-LEFS Series




Belt Drive *LEFB Series*

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

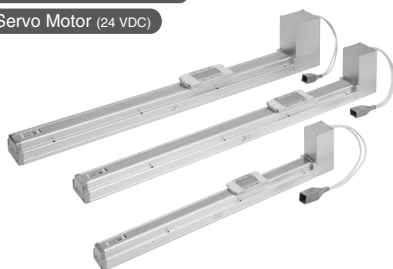


AC Servo Motor

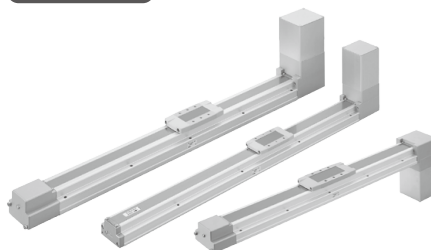

Support Guide

LEFG Series



LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC

LEC

S

LEC

SS-T

LEC

Y

Motor-

less

LAT

LZ

LC3F2

Model Selection



LEFS Series ▶ Page 62

LEFB Series ▶ Page 90

11-LEFS Series ▶ Page 514

Selection Procedure

Step 1 Check the work load-speed.



Step 2 Check the cycle time.

Step 3 Check the allowable moment.

Selection Example

Operating conditions

- Workpiece mass: 5 [kg]
- Speed: 300 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 200 [mm]
- Mounting orientation: Horizontal upward



<Speed-Work load graph>
(LEFS25/Step motor)

Step 1 Check the work load-speed. <Speed-Work load graph> (Pages 39 to 42)

Select the target model based on the workpiece mass and speed with reference to the <Speed-Work load graph>.

Selection example) The **LEFS25A-200** is temporarily selected based on the graph shown on the right side.

Step 2 Check the cycle time.

Calculate the cycle time using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be obtained by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the conditions such as motor types, load and in position of the step data. Therefore, calculate the settling time with reference to the following value.

$$T4 = 0.2 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$


$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \\ = \frac{200 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} \\ = 0.57 \text{ [s]}$$

$$T4 = 0.2 \text{ [s]}$$

Therefore, the cycle time can be obtained as follows.

$$T = T1 + T2 + T3 + T4 \\ = 0.1 + 0.57 + 0.1 + 0.2 \\ = 0.97 \text{ [s]}$$



L : Stroke [mm]

... (Operating condition)

V : Speed [mm/s]

... (Operating condition)

a1 : Acceleration [mm/s²]

... (Operating condition)

a2 : Deceleration [mm/s²]

... (Operating condition)

T1: Acceleration time [s]

Time until reaching the set speed

T2: Constant speed time [s]

Time while the actuator is operating at a constant speed


T3: Deceleration time [s]

Time from the beginning of the constant speed operation to stop


T4: Settling time [s]

Time until positioning is completed

Step 3 Check the guide moment.



Based on the above calculation result, the **LEFS25A-200** is selected.



* If the step motor and servo motors do not meet your specifications, also consider the AC servo specification (Page 46).

For the LECPA, refer to page 40.


Speed-Work Load Graph (Guide)

For Step Motor (Servo/24 VDC) LECP6, LECP1, LECPMJ


* The following graph shows the values when moving force is 100%.

LEFS16/Ball Screw Drive

Horizontal

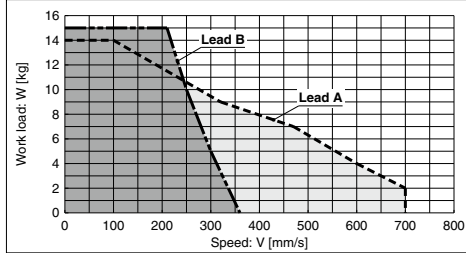


Vertical

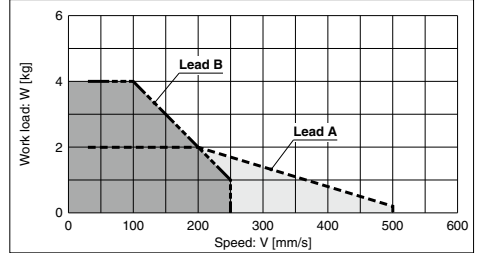


LEFS25/Ball Screw Drive

Horizontal

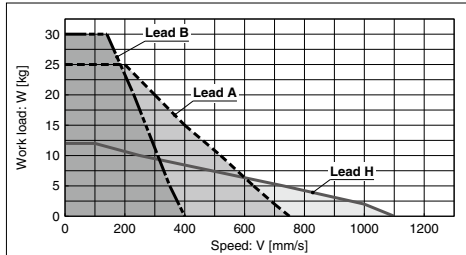


Vertical

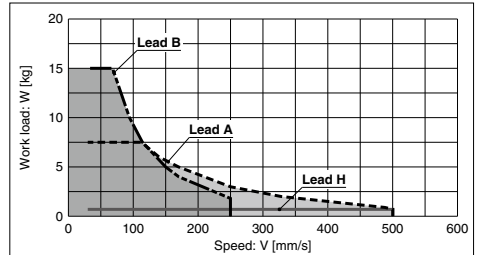


LEFS32/Ball Screw Drive

Horizontal

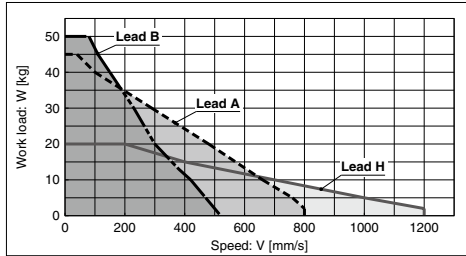


Vertical

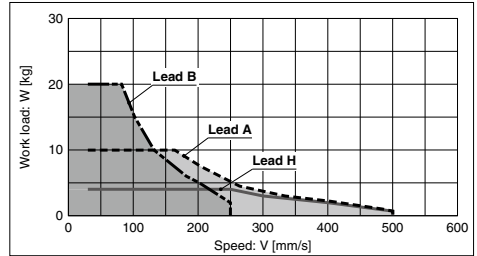


LEFS40/Ball Screw Drive

Horizontal

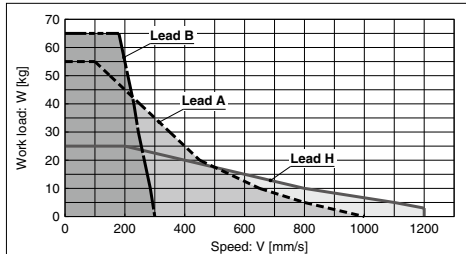

Vertical

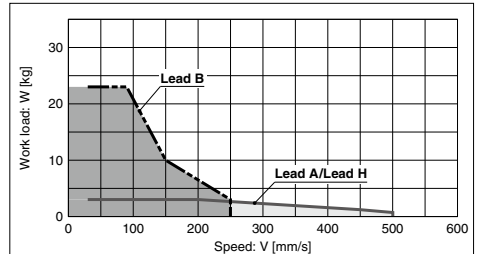

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC

LEC

S

LEC

SS-T

LEC

Y

Motor-

less

LAT

LZ


LC3F2

Speed-Work Load Graph (Guide) For Step Motor (Servo/24 VDC) LECPA


* The following graph shows the values when moving force is 100%.

LEFS16/Ball Screw Drive

Horizontal

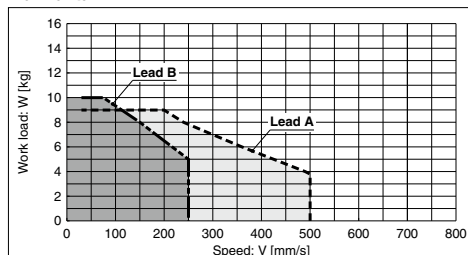


Vertical

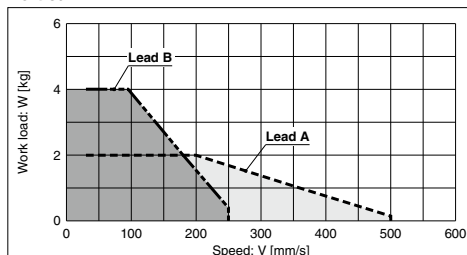


LEFS25/Ball Screw Drive

Horizontal

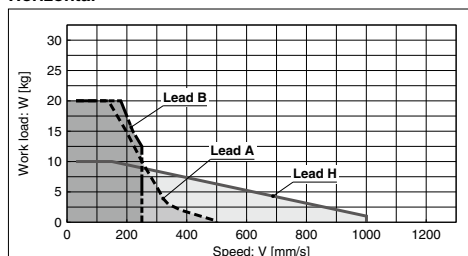


Vertical

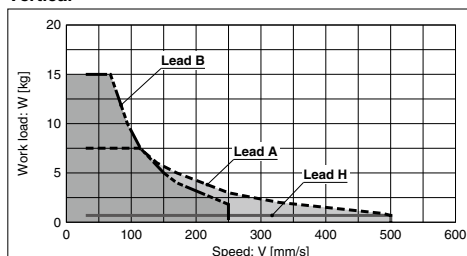


LEFS32/Ball Screw Drive

Horizontal

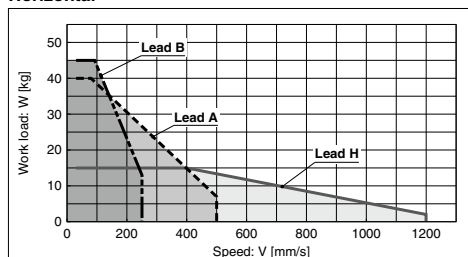


Vertical

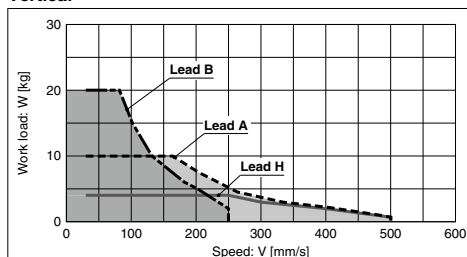


LEFS40/Ball Screw Drive

Horizontal

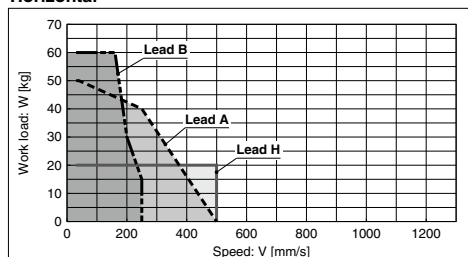

Vertical

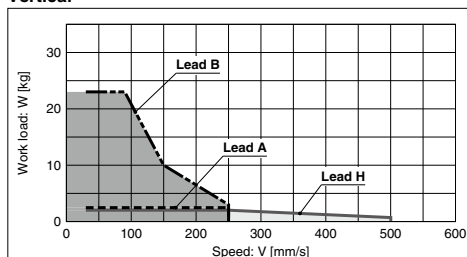


Speed-Work Load Graph (Guide)

For Step Motor (Servo/24 VDC) LECP6, LECP1, LECPMJ

* The following graph shows the values when moving force is 100%.

LEFB/Belt Drive

Horizontal

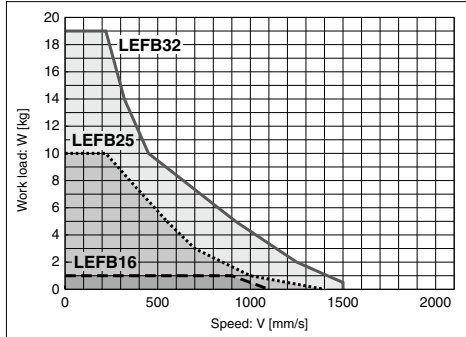


For Step Motor (Servo/24 VDC) LECPA

* The following graph shows the values when moving force is 100%.

LEFB/Belt Drive

Horizontal

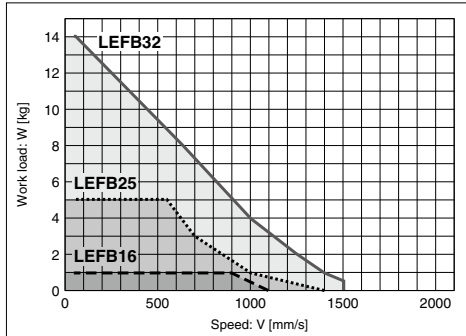

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC□

LEC

S□

LEC

SS-T

LEC

Y□

Motor-

less

LAT

LZ□


LC3F2

Speed-Work Load Graph (Guide) Servo Motor (24 VDC)


* The following graph shows the values when moving force is 250%.

LEFS16A/Ball Screw Drive

Horizontal

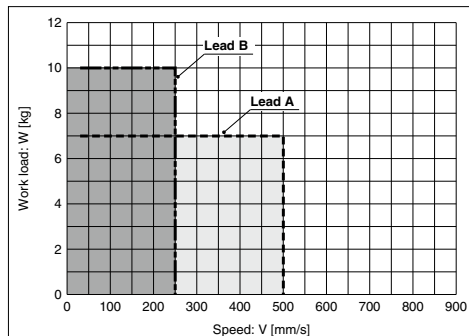


Vertical

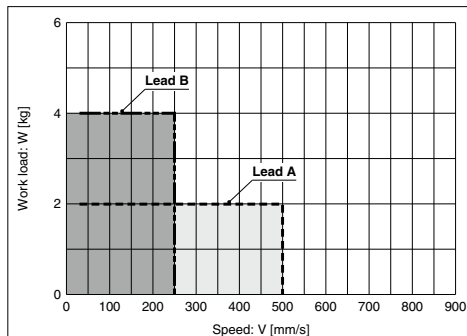


LEFS25A/Ball Screw Drive

Horizontal

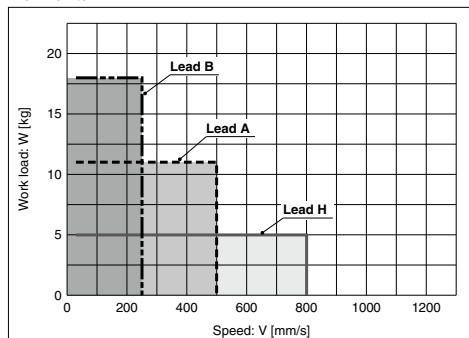

Vertical

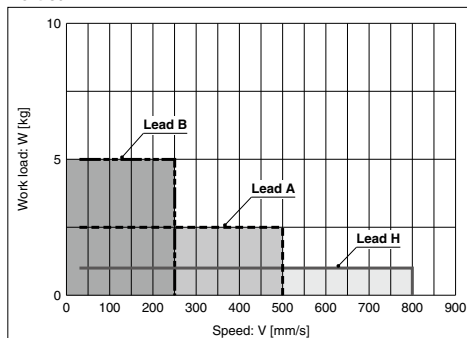


Servo Motor (24 VDC)

* The following graph shows the values when moving force is 250%.

LEFB/Belt Drive


Horizontal

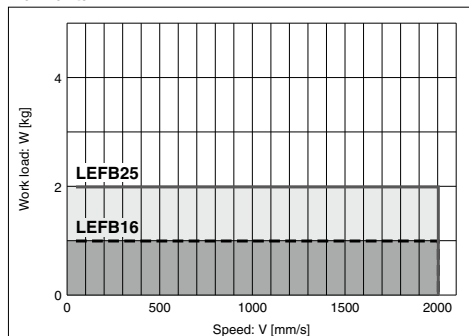

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" or the Electric Actuator Selection Software for confirmation, <http://www.smcworld.com>

Dynamic Allowable Moment

Acceleration/Deceleration — 1000 mm/s² - - - 3000 mm/s²

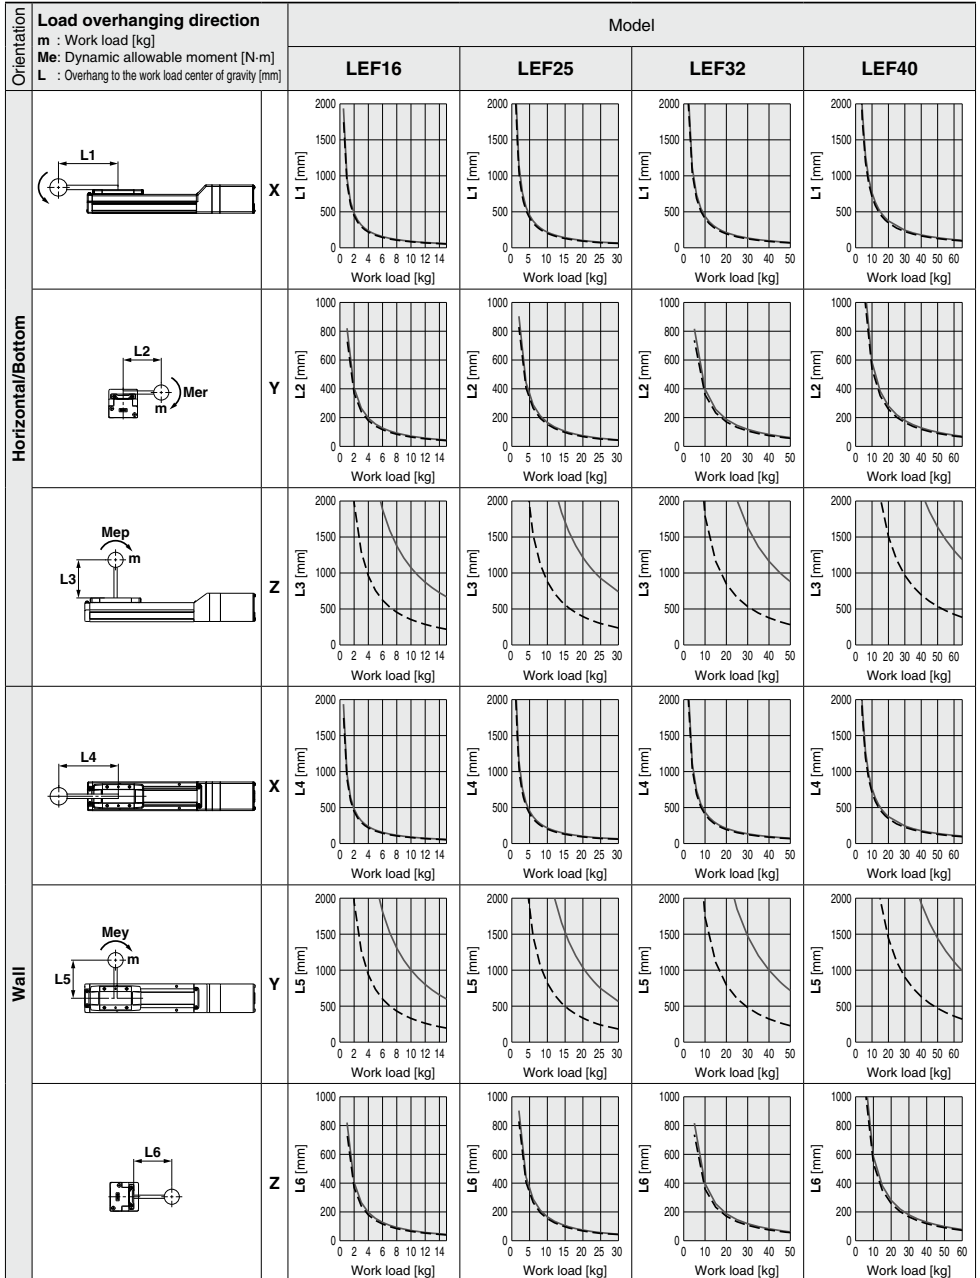

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC

LEC

SS-T

LEC

Y

Motor-

less

LAT


LZ

LC3F2

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" or the Electric Actuator Selection Software for confirmation, <http://www.smcworld.com>

Dynamic Allowable Moment

Acceleration/Deceleration — 1000 mm/s² - - - 3000 mm/s²

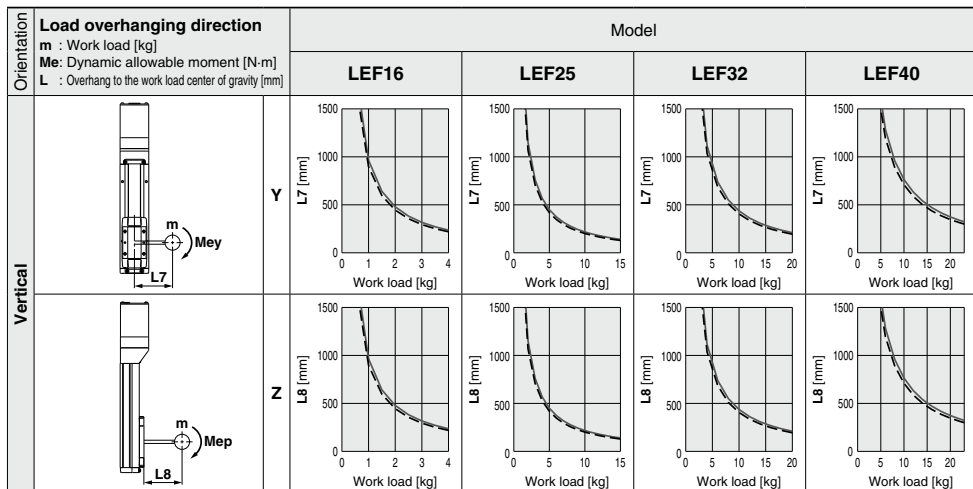

Calculation of Guide Load Factor

1. Decide operating conditions.

Model: LEFS/LEFB

Size: 16/25/32/40

Mounting orientation: Horizontal/Bottom/Wall/Vertical

2. Select the target graph with reference to the model, size and mounting orientation.

Based on the acceleration and work load, obtain the overhang [mm]: $L_x/L_y/L_z$ from the graph.

4. Calculate the load factor for each direction.

$$\alpha_x = X_c/L_x, \alpha_y = Y_c/L_y, \alpha_z = Z_c/L_z$$

5. Confirm the total of α_x , α_y and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load center position and series.


Acceleration [mm/s²]: a

Work load [kg]: m

Work load center position [mm]: $X_c/Y_c/Z_c$

Mounting orientation: Horizontal/Bottom/Wall/Vertical

Mounting orientation



Example

1. Operating conditions

Model: LEFS40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load center position [mm]: $X_c = 0, Y_c = 50, Z_c = 200$

2. Select the graphs for horizontal of the LEF40 on page 43.

3. $L_x = 400$ mm, $L_y = 250$ mm, $L_z = 1500$ mm

4. The load factor for each direction can be obtained as follows.

$$\alpha_x = 0/400 = 0$$

$$\alpha_y = 50/250 = 0.2$$

$$\alpha_z = 200/1500 = 0.13$$

5. $\alpha_x + \alpha_y + \alpha_z = 0.33 \leq 1$









Table Accuracy (Reference Value)

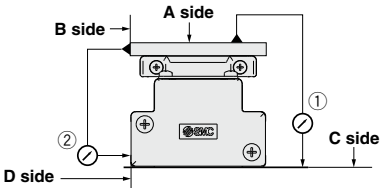

Model	Traveling parallelism [mm] (Every 300 mm)	
	① C side traveling parallelism to A side	② D side traveling parallelism to B side
LEF16	0.05	0.03
LEF25	0.05	0.03
LEF32	0.05	0.03
LEF40	0.05	0.03

Note) Traveling parallelism does not include the mounting surface accuracy.

Table Displacement (Reference Value)

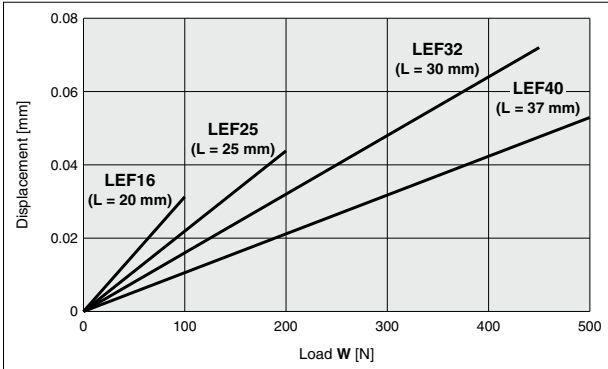


Note 1) This displacement is measured when a 15 mm aluminum plate is mounted and fixed on the table.


Note 2) Check the clearance and play of the guide separately.

Overhang Displacement Due to Table Clearance (Reference Value)

Basic type

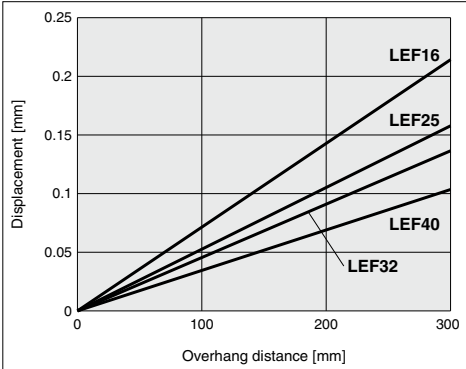

High precision type

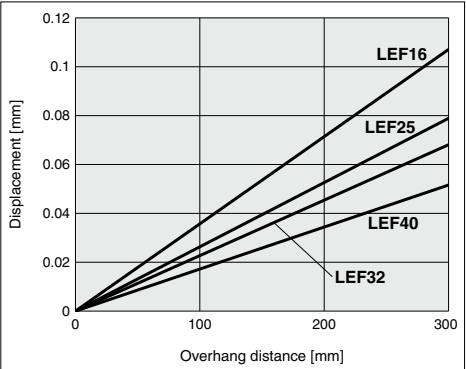

Model Selection



LEFS Series ▶ Page 76

11-LEFS Series ▶ Page 522

Selection Procedure

Step 1 Check the work load-speed.



Step 2 Check the cycle time.

Step 3 Check the allowable moment.

Selection Example

Operating conditions

- Workpiece mass: 45 [kg]
- Speed: 300 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 200 [mm]
- Mounting position: Horizontal upward



<Speed-Work load graph>
(LEFS40)

Step 1 Check the work load-speed. <Speed-Work load graph> (Page 47)

Select the target model based on the workpiece mass and speed with reference to the <Speed-Work load graph>.

Selection example) The LEFS40S4B-200 is temporarily selected based on the graph shown on the right side.

Step 2 Check the cycle time.

Calculate the cycle time using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be obtained by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the motor type and load. The value below is recommended.

$$T4 = 0.05 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$


$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$\begin{aligned} T2 &= \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \\ &= \frac{200 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} \\ &= 0.57 \text{ [s]} \end{aligned}$$

$$T4 = 0.05 \text{ [s]}$$

Therefore, the cycle time can be obtained as follows.

$$\begin{aligned} T &= T1 + T2 + T3 + T4 \\ &= 0.1 + 0.57 + 0.1 + 0.05 \\ &= 0.82 \text{ [s]} \end{aligned}$$



L: Stroke [mm]

... (Operating condition)

V: Speed [mm/s]

... (Operating condition)

a1: Acceleration [mm/s²]

... (Operating condition)

a2: Deceleration [mm/s²]

... (Operating condition)

T1: Acceleration time [s]

Time until reaching the set speed

T2: Constant speed time [s]


Time while the actuator is operating at a constant speed

T3: Deceleration time [s]


Time from the beginning of the constant speed operation to stop

T4: Settling time [s]

Time until positioning is completed

Step 3 Check the guide moment.


Based on the above calculation result, the LEFS40S4B-200 is selected.




Speed-Work Load Graph/Required Conditions for "Regeneration Option"(Guide)


* The allowable speed is restricted depending on the stroke.
Select it by referring to "Allowable Stroke Speed" below.

LEFS25/Ball Screw Drive

Horizontal

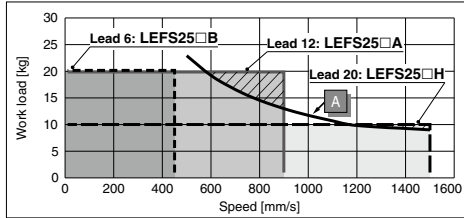


Vertical

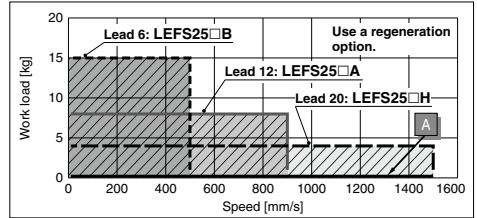


LEFS32/Ball Screw Drive

Horizontal

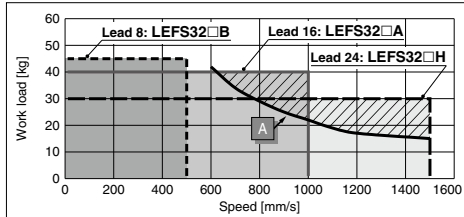


Vertical

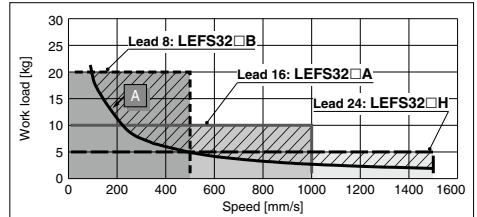


LEFS40/Ball Screw Drive

Horizontal

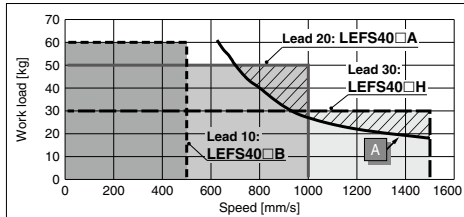

Vertical

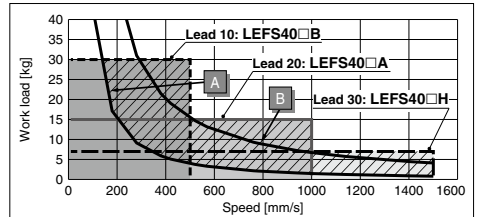

Required conditions for "Regeneration option"

* Regeneration option is required when using product above regeneration line in graph.
(Order separately.)

"Regeneration Option" Models

Operating condition	Model
A	LEC-MR-RB-032
B	LEC-MR-RB-12


Allowable Stroke Speed

														[mm/s]	
Model	AC servo motor	Lead		Stroke [mm]											
		Symbol	[mm]	Up to 100	Up to 200	Up to 300	Up to 400	Up to 500	Up to 600	Up to 700	Up to 800	Up to 900	Up to 1000	Up to 1100	Up to 1200
LEFS25	100 W □40	H	20	1500				1200	900	700	550	—	—	—	—
		A	12	900				720	540	420	330	—	—	—	—
		B	6	450				360	270	210	160	—	—	—	—
		(Motor rotation speed)		(4500 rpm)				(3650 rpm)	(2700 rpm)	(2100 rpm)	(1650 rpm)	—	—	—	—
LEFS32	200 W □60	H	24	1500				1200	930	750	610	510	—	—	—
		A	16	1000				800	620	500	410	340	—	—	—
		B	8	500				400	310	250	200	170	—	—	—
		(Motor rotation speed)		(3750 rpm)				(3000 rpm)	(2325 rpm)	(1875 rpm)	(1537 rpm)	(1275 rpm)	—	—	—
LEFS40	400 W □60	H	30	—	1500				1410		1140	930	780	500	500
		A	20	—	1000				940		760	620	520	440	380
		B	10	—	500				470		380	310	260	220	190
		(Motor rotation speed)		—	(3000 rpm)				(2820 rpm)		(2280 rpm)	(1860 rpm)	(1560 rpm)	(1320 rpm)	(1140 rpm)

Work Load–Acceleration/Deceleration Graph (Guide)


LEFS25S□H/Ball Screw Drive

Horizontal

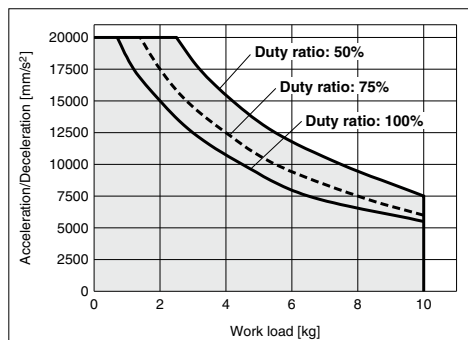


LEFS25S□H/Ball Screw Drive

Vertical

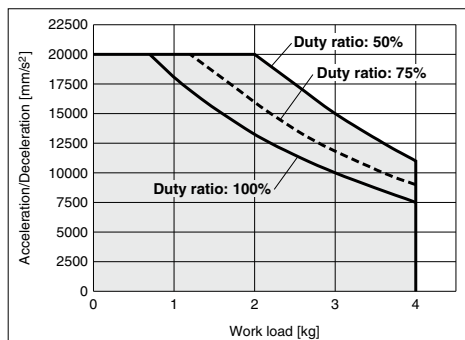


LEFS25S□A/Ball Screw Drive

Horizontal

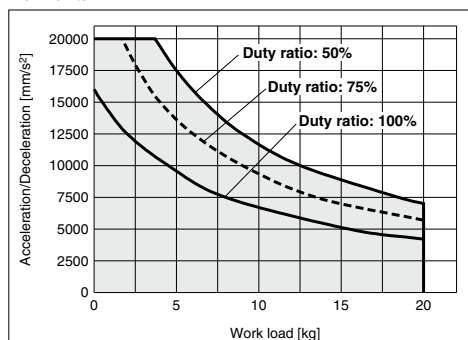


LEFS25S□A/Ball Screw Drive

Vertical

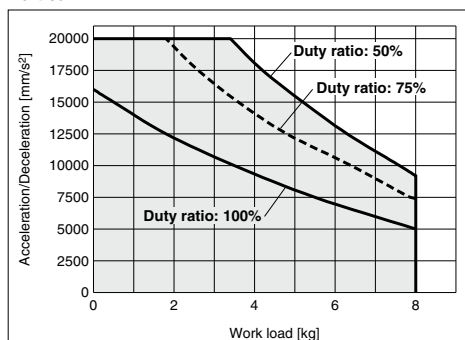


LEFS25S□B/Ball Screw Drive

Horizontal

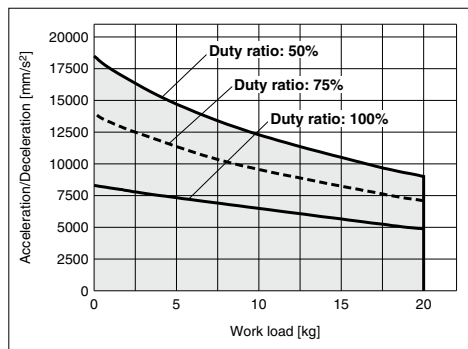

LEFS25S□B/Ball Screw Drive


Vertical

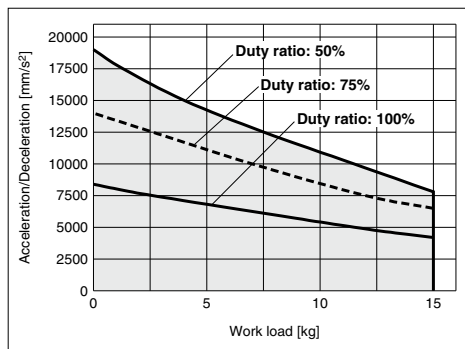

Work Load–Acceleration/Deceleration Graph (Guide)


LEFS32S□H/Ball Screw Drive

Horizontal

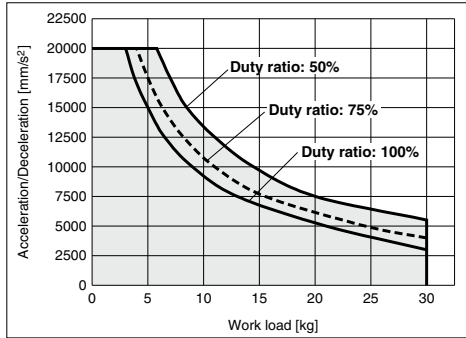


LEFS32S□H/Ball Screw Drive

Vertical

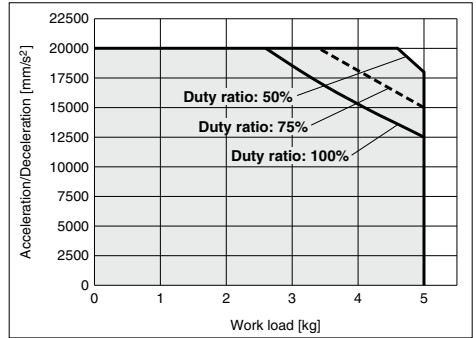


LEFS32S□A/Ball Screw Drive

Horizontal

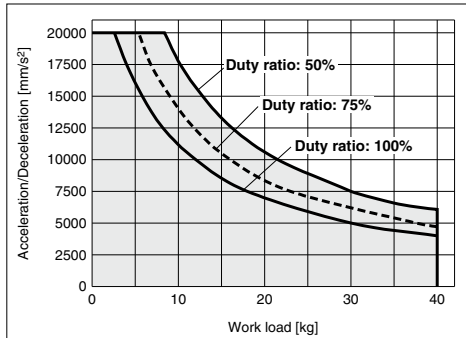


LEFS32S□A/Ball Screw Drive

Vertical

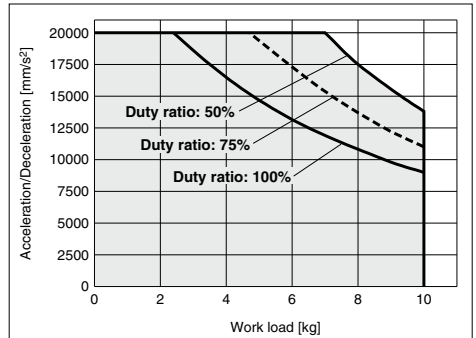


LEFS32S□B/Ball Screw Drive

Horizontal

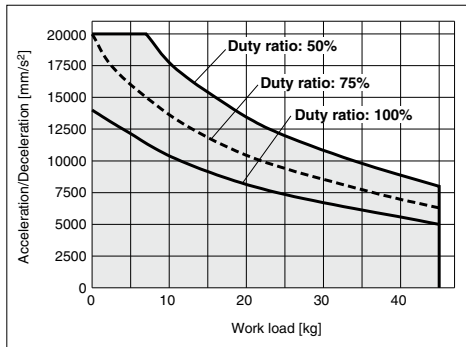

LEFS32S□B/Ball Screw Drive

Vertical

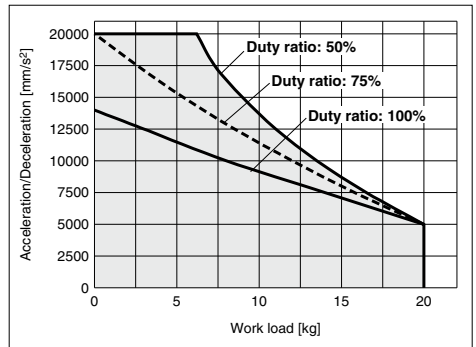

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC□

LEC

S□

LEC

SS-T

LEC

Y□

Motor-

less

LAT


LZ□

LC3F2

Work Load–Acceleration/Deceleration Graph (Guide)


LEFS40S□H/Ball Screw Drive

Horizontal

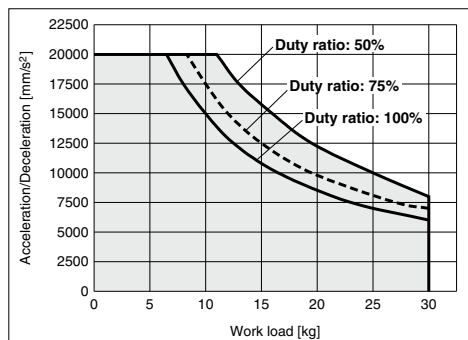


LEFS40S□H/Ball Screw Drive

Vertical

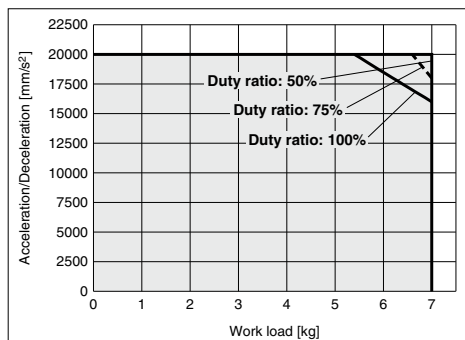


LEFS40S□A/Ball Screw Drive

Horizontal

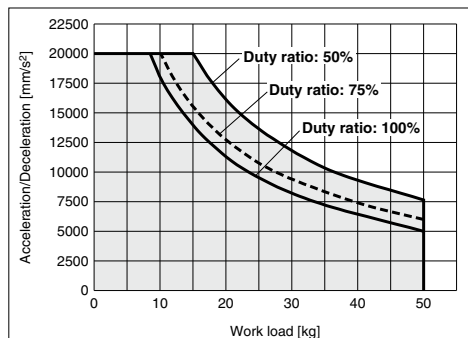


LEFS40S□A/Ball Screw Drive

Vertical

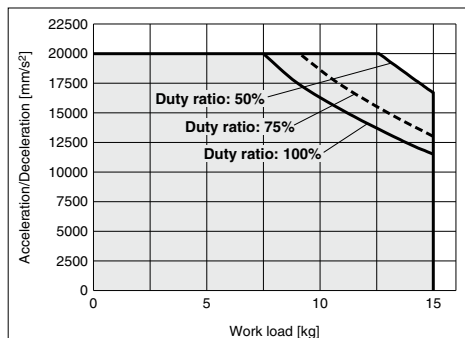


LEFS40S□B/Ball Screw Drive

Horizontal

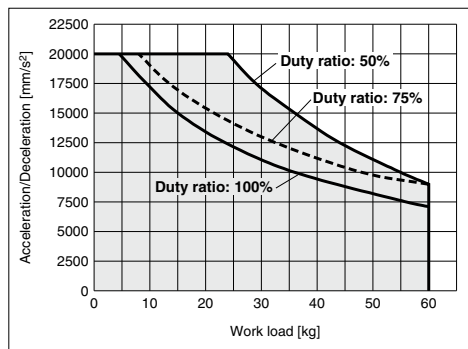

LEFS40S□B/Ball Screw Drive


Vertical

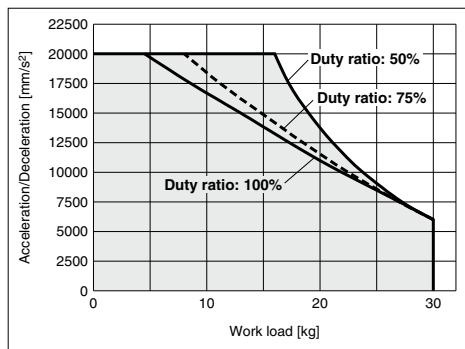

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" or the Electric Actuator Selection Software for confirmation, <http://www.smcworld.com>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² 5000 mm/s² - - - - 10000 mm/s² - - - - 20000 mm/s²

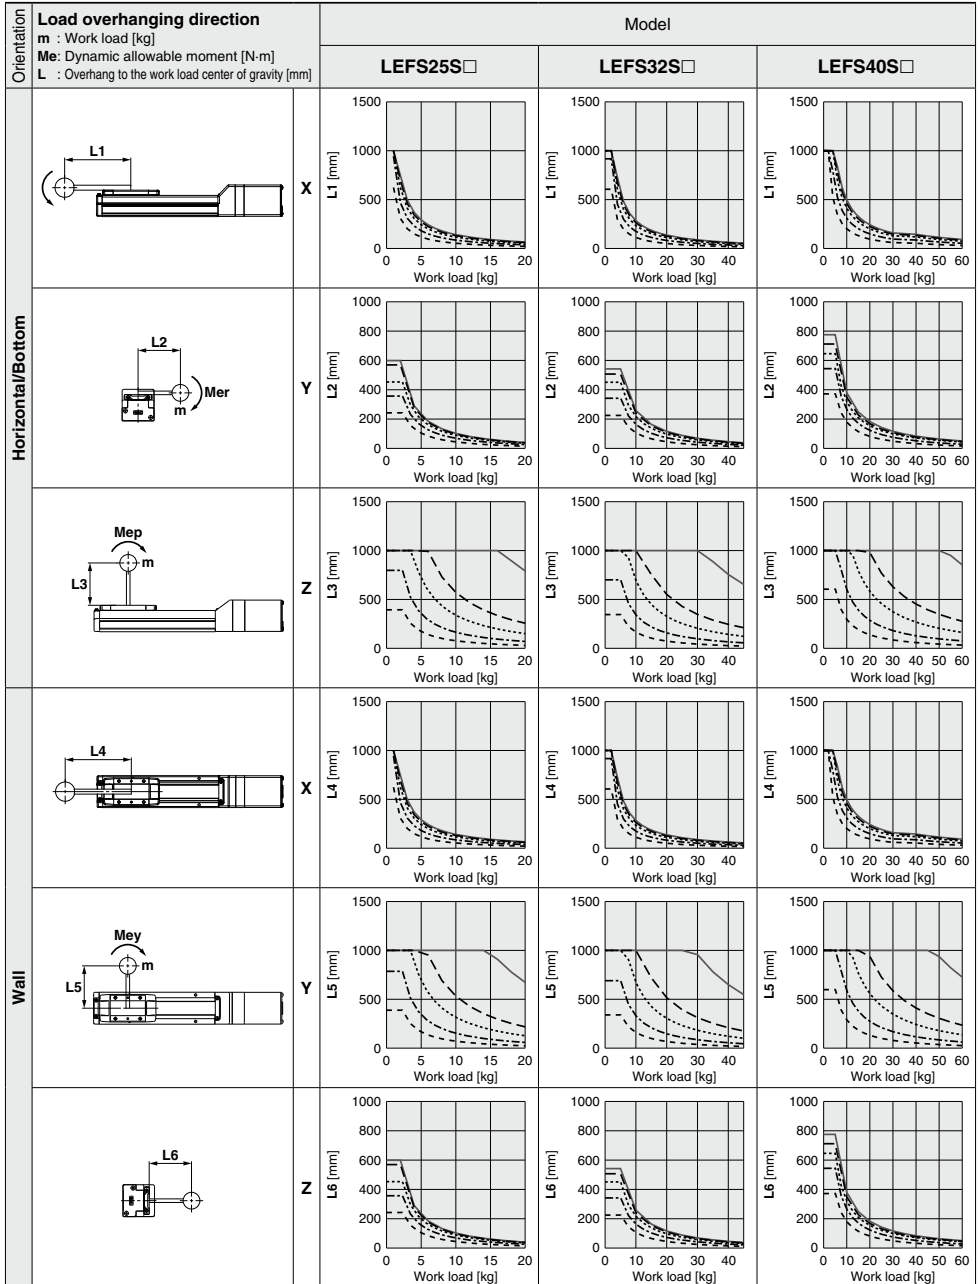

LEF

LEJ

LEL

LEM

LEY

LES

LEPY
LEPS

LER

LEH

LEY
-X5

11-
LEFS

11-
LEJS

25A-

LEC□

LEC
S□

LEC
SS-T

LEC
Y□

Motor-
less


LAT

LZ□

LC3F2

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" or the Electric Actuator Selection Software for confirmation, <http://www.smcworld.com>

Dynamic Allowable Moment

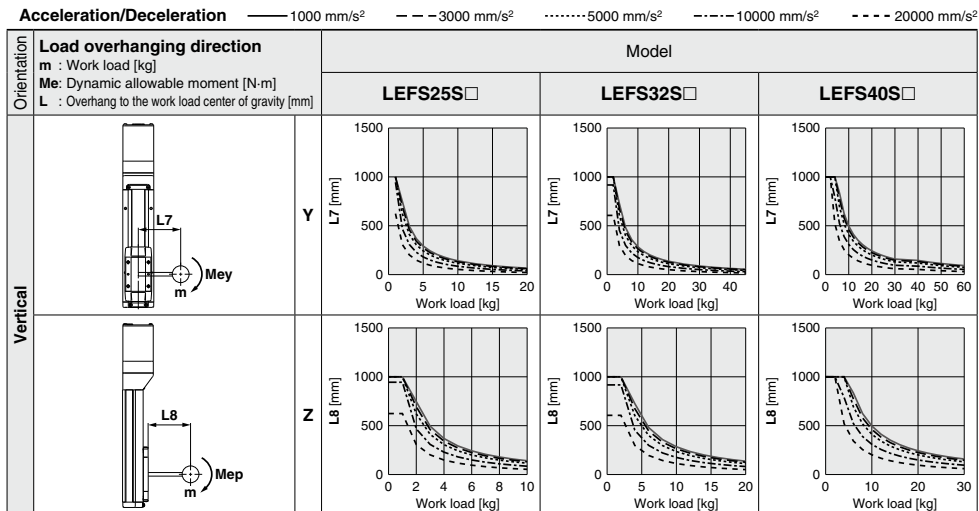

Calculation of Guide Load Factor

- Decide operating conditions.

Model: LEFS

Size: 25/32/40

Mounting orientation: Horizontal/Bottom/Wall/Vertical

- Select the target graph with reference to the model, size and mounting orientation.

- Based on the acceleration and work load, obtain the overhang [mm]: $L_x/L_y/L_z$ from the graph.

- Calculate the load factor for each direction.

$$\alpha_x = X_c/L_x, \alpha_y = Y_c/L_y, \alpha_z = Z_c/L_z$$

- Confirm the total of α_x , α_y and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$


When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load center position and series.

Acceleration [mm/s²]: **a**

Work load [kg]: **m**

Work load center position [mm]: **Xc/Yc/Zc**

Mounting orientation



Example

- Operating conditions

Model: LEFS40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load center position [mm]: **Xc = 0, Yc = 50, Zc = 200**

- Select the graphs for horizontal of the LEFS40 on page 51.

- Lx = 250 mm, Ly = 180 mm, Lz = 1000 mm**

- The load factor for each direction can be obtained as follows.

$$\alpha_x = 0/250 = 0$$

$$\alpha_y = 50/180 = 0.27$$

$$\alpha_z = 200/1000 = 0.2$$

- $\alpha_x + \alpha_y + \alpha_z = 0.47 \leq 1$**









Table Accuracy (Reference Value)

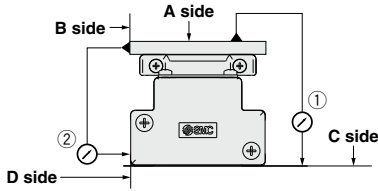

Model	Traveling parallelism [mm] (Every 300 mm)	
	① C side traveling parallelism to A side	② D side traveling parallelism to B side
LEFS25	0.05	0.03
LEFS32	0.05	0.03
LEFS40	0.05	0.03

Note) Traveling parallelism does not include the mounting surface accuracy.

Table Displacement (Reference Value)

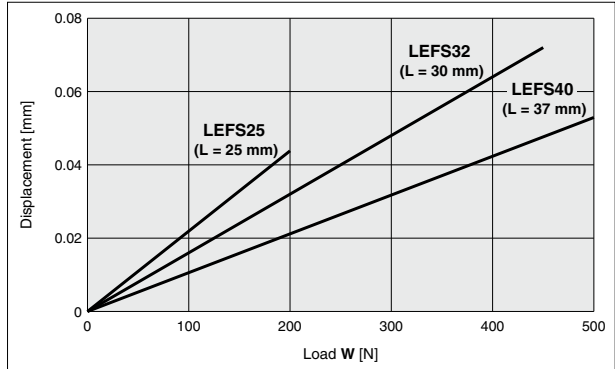


Note 1) This displacement is measured when a 15 mm aluminum plate is mounted and fixed on the table.


Note 2) Check the clearance and play of the guide separately.

Overhang Displacement Due to Table Clearance (Reference Value)

Basic type

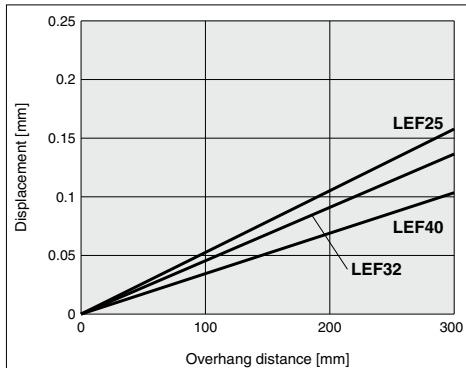


High precision type

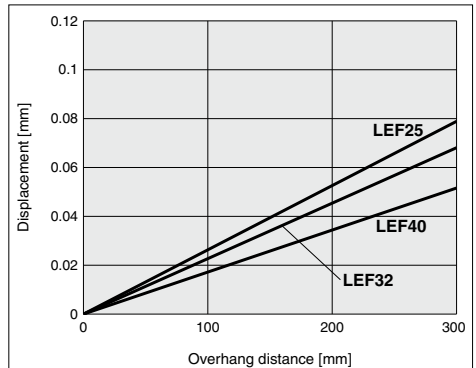

Model Selection

LEFB Series ▶ Page 97





Selection Procedure

Step 1 Check the work load-speed. → **Step 2** Check the cycle time. → **Step 3** Check the allowable moment.

Selection Example

Operating conditions

- Workpiece mass: 20 [kg]
- Speed: 1500 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 2000 [mm]
- Mounting position: Horizontal upward



<Speed-Work load graph>
(LEFB40)

Step 1 Check the work load-speed. <Speed-Work load graph> (Page 55)

Select the target model based on the workpiece mass and speed with reference to the <Speed-Work load graph>.

Selection example) The **LEFB40S4S-2000** is temporarily selected based on the graph shown on the right side.

Step 2 Check the cycle time.

Calculate the cycle time using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be obtained by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the motor type and load. The value below is recommended.

$$T4 = 0.05 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 1500/3000 = 0.5 \text{ [s]}$$


$$T3 = V/a2 = 1500/3000 = 0.5 \text{ [s]}$$

$$\begin{aligned} T2 &= \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \\ &= \frac{2000 - 0.5 \cdot 1500 \cdot (0.5 + 0.5)}{1500} \\ &= 0.83 \text{ [s]} \end{aligned}$$

$$T4 = 0.05 \text{ [s]}$$

Therefore, the cycle time can be obtained as follows.

$$\begin{aligned} T &= T1 + T2 + T3 + T4 \\ &= 0.5 + 0.83 + 0.5 + 0.05 \\ &= 1.88 \text{ [s]} \end{aligned}$$



L : Stroke [mm]

... (Operating condition)

V : Speed [mm/s]

... (Operating condition)

a1: Acceleration [mm/s²]

... (Operating condition)

a2: Deceleration [mm/s²]

... (Operating condition)

T1: Acceleration time [s]

Time until reaching the set speed

T2: Constant speed time [s]

Time while the actuator is operating at a constant speed


T3: Deceleration time [s]

Time from the beginning of the constant speed operation to stop


T4: Settling time [s]

Time until positioning is completed

Step 3 Check the guide moment.




Based on the above calculation result, the **LEFB40S4S-2000** is selected.



Speed-Work Load Graph/Required Conditions for "Regeneration Option"(Guide)

LEFB□/Belt Drive

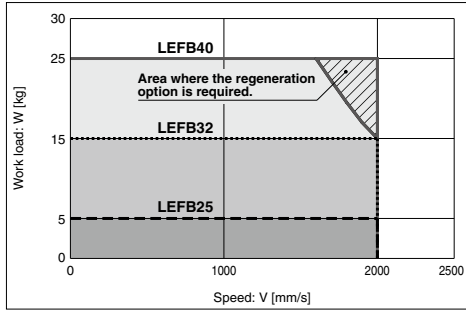


* The shaded area in the graph requires the regeneration option (LEC-MR-RB-032).

Cycle Time Graph (Guide)

LEFB□/Belt Drive

LEFB25/32/40

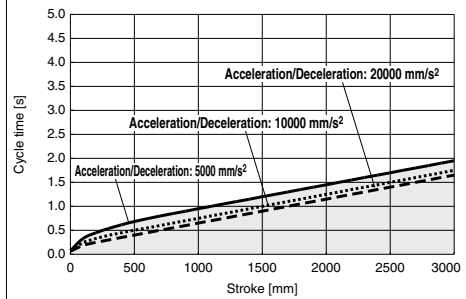


* Cycle time is for when maximum speed.

* Maximum stroke: LEFB25: 2000 mm
LEFB32: 2500 mm
LEFB40: 3000 mm


Work Load–Acceleration/Deceleration Graph (Guide)

LEFB□/Belt Drive


LEFB25S□ (Duty ratio)

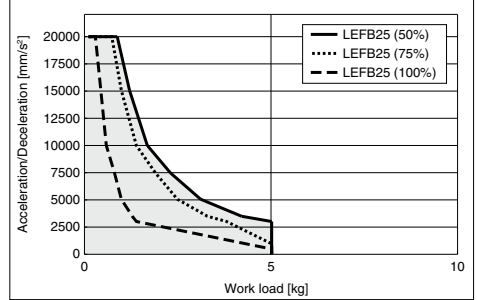

LEFB32S□ (Duty ratio)

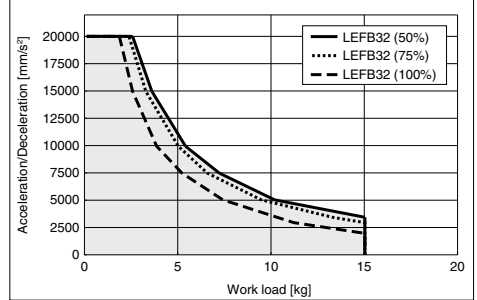

LEFB40S□ (Duty ratio)

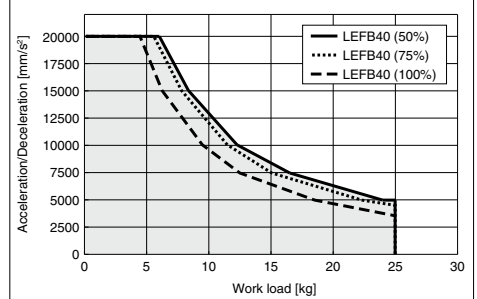

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC□

LEC

S□

LEC

SS-T

LEC

Y□

Motor-

less


LAT

LZ□

LC3F2

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" or the Electric Actuator Selection Software for confirmation, <http://www.smcworld.com>

Dynamic Allowable Moment

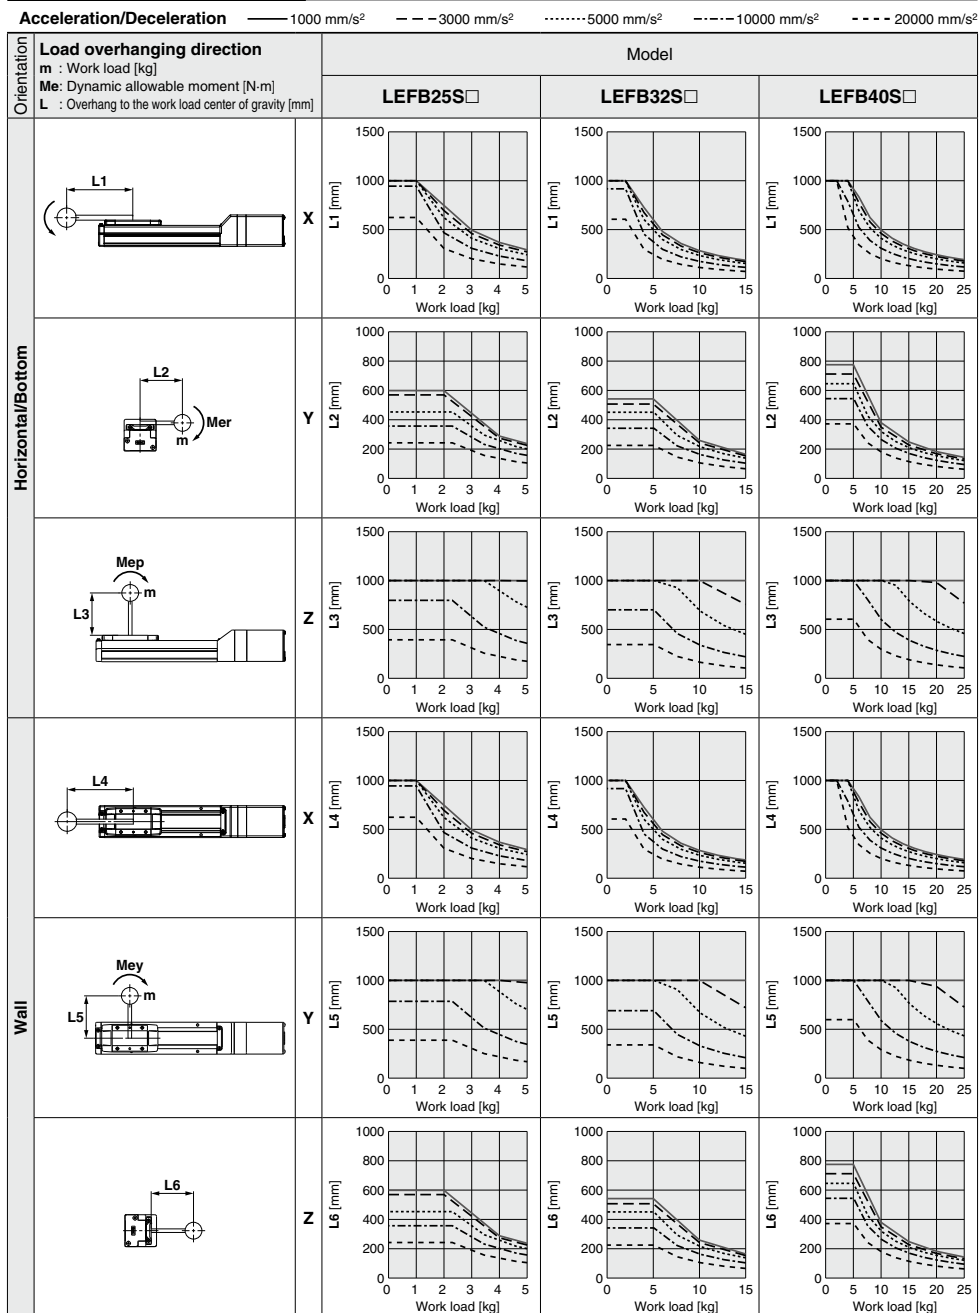

Calculation of Guide Load Factor

1. Decide operating conditions.

Model: LEFB

Size: 25/32/40

Mounting orientation: Horizontal/Bottom/Wall

Acceleration [mm/s²]: **a**

Work load [kg]: **m**

Work load center position [mm]: **Xc/Yc/Zc**

2. Select the target graph with reference to the model, size and mounting orientation.

3. Based on the acceleration and work load, obtain the overhang [mm]: **Lx/Ly/Lz** from the graph.

4. Calculate the load factor for each direction.




$$\alpha x = Xc/Lx, \alpha y = Yc/Ly, \alpha z = Zc/Lz$$

5. Confirm the total of αx , αy and αz is 1 or less.

$$\alpha x + \alpha y + \alpha z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load center position and series.

Mounting orientation



Example

1. Operating conditions

Model: LEFB40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load center position [mm]: **Xc = 0, Yc = 50, Zc = 200**

2. Select the graphs for horizontal of the LEFB40 on page 56.

3. **Lx = 250 mm, Ly = 180 mm, Lz = 1000 mm**




4. The load factor for each direction can be obtained as follows.

$$\alpha x = 0/250 = 0$$

$$\alpha y = 50/180 = 0.27$$

$$\alpha z = 200/1000 = 0.2$$

5. $\alpha x + \alpha y + \alpha z = 0.47 \leq 1$



LEF

LEJ

LEL

LEM

LEY

LES

LEPY
LEPS

LER

LEH

LEY
-X5

11-
LEFS

11-
LEJS

25A-

LEC□

LEC
S□

LEC
SS-T

LEC
Y□


Motor-
less

LAT

LZ□

LC3F2



Table Accuracy (Reference Value)

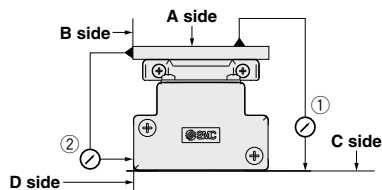

Model	Traveling parallelism [mm] (Every 300 mm)	
	① C side traveling parallelism to A side	② D side traveling parallelism to B side
LEFB25	0.05	0.03
LEFB32	0.05	0.03
LEFB40	0.05	0.03

Note) Traveling parallelism does not include the mounting surface accuracy.

Table Displacement (Reference Value)

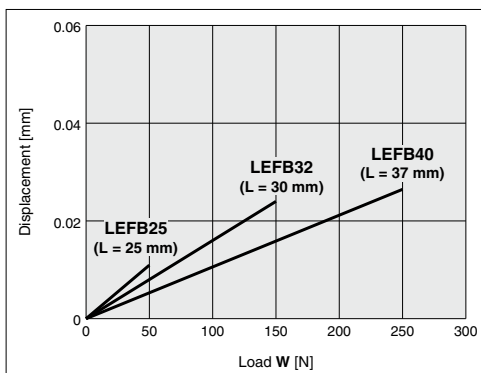


Note 1) This displacement is measured when a 15 mm aluminum plate is mounted and fixed on the table.


Note 2) Check the clearance and play of the guide separately.

Overhang Displacement Due to Table Clearance (Reference Value)

Basic type

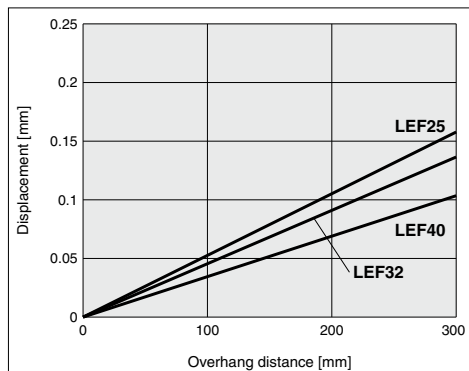

High precision type

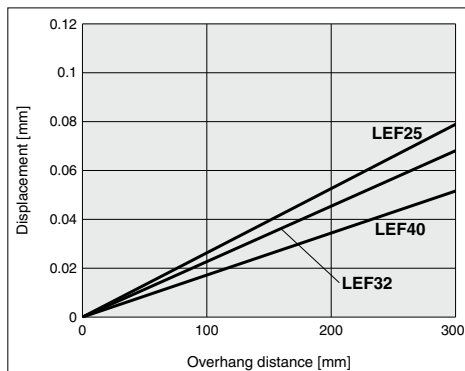

Model Selection


LEFG Series ▶ Pages 86, 108 11-LEFG Series ▶ Page 527



Rated Load

Unit: N				
Rated load	LEFG16	LEFG25	LEFG32	LEFG40
Basic dynamic rated load	6250	8950	16500	22700
Basic static rated load	8350	13900	22000	34500



Table Accuracy (Reference Value)

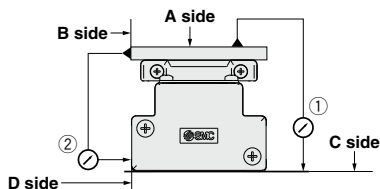

Model	Traveling parallelism [mm] (Every 300 mm)	
	① C side traveling parallelism to A side	② D side traveling parallelism to B side
LEFG16	0.05	0.03
LEFG25	0.05	0.03
LEFG32	0.05	0.03
LEFG40	0.05	0.03

Note) Traveling parallelism does not include the mounting surface accuracy.

Table Displacement (Reference Value)

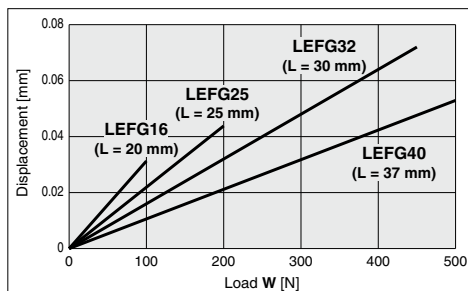

Note 1) This displacement is measured when a 15 mm aluminum plate is mounted and fixed on the table.

Note 2) Check the clearance and play of the guide separately.

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC

LEC

S

LEC

SS-T

LEC

Y

Motor-

less

LAT

LZ

LC3F2

(11-)LEFG Series

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)


AC Servo Motor

Clean Room Specification

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" or the Electric Actuator Selection Software for confirmation, <http://www.smcworld.com>

Dynamic Allowable Moment


Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² 5000 mm/s²

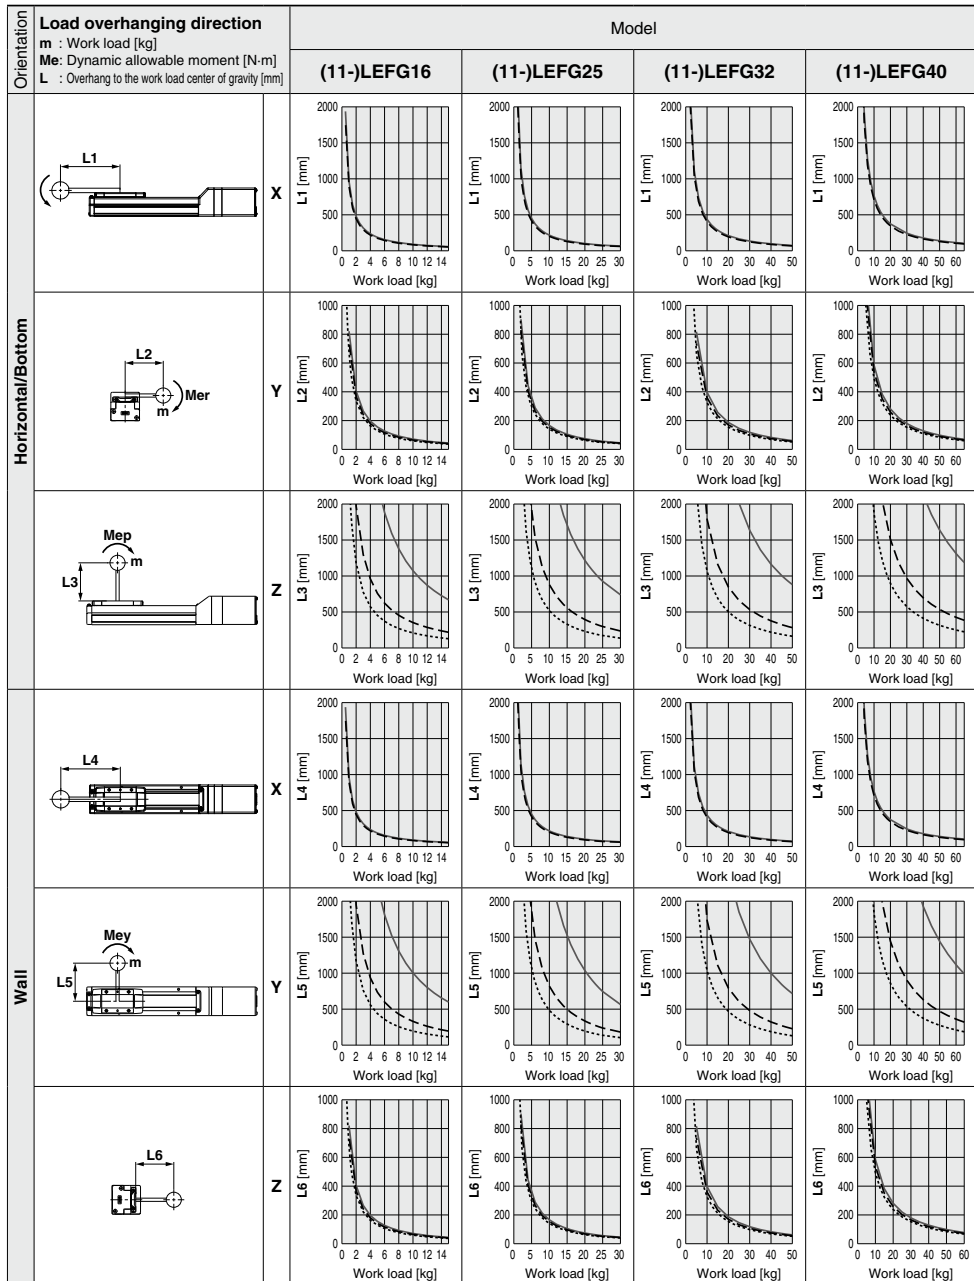

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" or the Electric Actuator Selection Software for confirmation, <http://www.smcworld.com>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² 5000 mm/s²

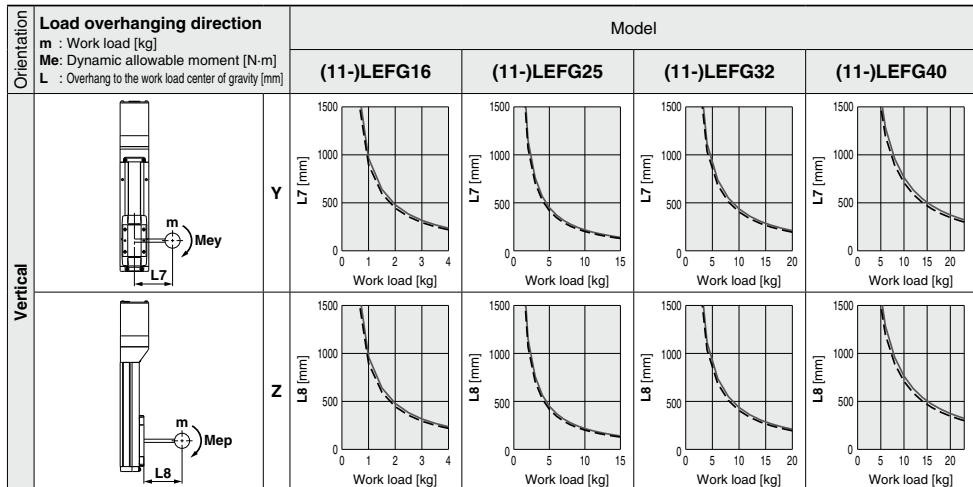

Calculation of Guide Load Factor

1. Decide operating conditions.

Model: LEFG

Size: 16/25/32/40

Mounting orientation: Horizontal/Bottom/Wall/Vertical

2. Select the target graph with reference to the model, size and mounting orientation.

3. Based on the acceleration and work load, obtain the overhang [mm]: Lx/Ly/Lz from the graph.

4. Calculate the load factor for each direction.

$$\alpha x = Xc/Lx, \alpha y = Yc/Ly, \alpha z = Zc/Lz$$

5. Confirm the total of $\alpha x, \alpha y$ and αz is 1 or less.

$$\alpha x + \alpha y + \alpha z \leq 1$$


When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load center position and series.

Acceleration [mm/s²]: a

Work load [kg]: m

Work load center position [mm]: Xc/Yc/Zc

Mounting orientation



Example

1. Operating conditions

Model: LEFG40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load center position [mm]: Xc = 0, Yc = 50, Zc = 200

2. Select the graphs for horizontal of the (11-)LEFG40 on page 60.

3. Lx = 400 mm, Ly = 250 mm, Lz = 1500 mm




4. The load factor for each direction can be obtained as follows.

$$\alpha x = 0/400 = 0$$

$$\alpha y = 50/250 = 0.2$$

$$\alpha z = 200/1500 = 0.13$$

5. $\alpha x + \alpha y + \alpha z = 0.33 \leq 1$



Electric Actuator/Slider Type Ball Screw Drive



LEFS Series LEFS16, 25, 32, 40

Clean Room Specification ▶ Page 514 Secondary Battery Compatible ▶ Page 538

How to Order

LEFS **H** **25** **R** **B** - **200** - **S** **1** **6N** **1**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

① Accuracy

NII	Basic type
H	High precision type

② Size

16
25
32
40

③ Motor mounting position

NII	In-line
R	Right side parallel
L	Left side parallel

④ Motor type

Symbol	Type	Applicable size				Compatible controller/driver
		LEFS16	LEFS25	LEFS32	LEFS40	
NII	Step motor (Servo/24 VDC)	●	●	●	●	LECP6 LECP1 LECPA LECPMJ
A	Servo motor (24 VDC)	●	●	—	—	LECA6

⑤ Lead [mm]

Symbol	LEFS16	LEFS25	LEFS32	LEFS40
H	—	20	24	30
A	10	12	16	20
B	5	6	8	10

⑥ Stroke [mm]

50	50
to	to
1200	1200

* Refer to the applicable stroke table.

⑦ Motor option

NII	Without option
B	With lock

⚠ Caution

[CE-compliant products]

① EMC compliance was tested by combining the electric actuator LEF series and the controller LEC series.

The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, conformity to the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify conformity to the EMC directive for the machinery and equipment as a whole.

② For the servo motor (24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to page 568 for the noise filter set. Refer to the LECA series Operation Manual for installation.

③ CC-Link direct input type (LECPMJ) is not CE-compliant.

[UL-compliant products]

When conformity to UL is required, the electric actuator and controller/driver should be used with a UL1310 Class 2 power supply.

Applicable Stroke Table

●: Standard

Model	Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200	Manufacturable stroke range [mm]
LEFS16	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	50 to 500
LEFS25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	50 to 800
LEFS32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	50 to 1000
LEFS40	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	150 to 1200


* Please consult with SMC for non-standard strokes as they are produced as special orders.

The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and the actuator is correct.

<Check the following before use.>

- Check the actuator label for model number. This matches the controller/driver.
- Check Parallel I/O configuration matches (NPN or PNP).


* Refer to the Operation Manual for using the products. Please download it via our website, <http://www.smcworld.com>

Electric Actuator/Slider Type Ball Screw Drive **LEFS Series**

Step Motor (Servo/24 VDC) Servo Motor (24 VDC)



8 Actuator cable type^{*1}

NII	Without cable
S	Standard cable ^{*2}
R	Robotic cable (Flexible cable) ^{*3}

- ^{*1} The standard cable should be used on fixed parts. For using on moving parts, select the robotic cable.
^{*2} Only available for the motor type "Step motor."
^{*3} Fix the motor cable protruding from the actuator to keep it unmovable. For details about fixing method, refer to Wiring/Cables in the Electric Actuators Precautions.

9 Actuator cable length [m]

NII	Without cable
1	1.5
3	3
5	5
8	8"
A	10"
B	15"
C	20"

- ^{*} Produced upon receipt of order (Robotic cable only) Refer to the specifications Note 2) on pages 64 and 65.

10 Controller/Driver type^{*1}

NII	Without controller/driver	
6N	LECP6/LECA6	NPN
6P	(Step data input type)	PNP
1N	LECP1^{*2}	NPN
1P	(Programless type)	PNP
MJ	LECPMJ^{*2 *3}	—
	(CC-Link direct input type)	
AN	LECPA^{*2 *4}	NPN
AP	(Pulse input type)	PNP

- ^{*1} For details about controller/driver and compatible motor, refer to the compatible controller/driver below.
^{*2} Only available for the motor type "Step motor."
^{*3} Not applicable to CE.
^{*4} When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) on page 596 separately.

12 Controller/Driver mounting

NII	Screw mounting
D	DIN rail mounting [*]

- ^{*} DIN rail is not included. Order it separately.

11 I/O cable length^{*1}, Communication plug

NII	Without cable (Without communication plug connector) ^{*3}
1	1.5 m
3	3 m ^{*2}
5	5 m ^{*2}
S	Straight type communication plug connector ^{*3}
T	T-branch type communication plug connector ^{*3}

- ^{*1} When "Without controller/driver" is selected for controller/driver types, I/O cable cannot be selected.
Refer to page 568 (For LECP6/LECA6), page 582 (For LECP1) or page 596 (For LECPA) if I/O cable is required.
^{*2} When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector.
^{*3} For the LECPMJ, only "NII", "S" and "T" are selectable since I/O cable is not included.

Support Guide/LEFS Series

A support guide is designed to support workpieces with significant overhang.

Page 86



Compatible Controller/Driver

Type	Step data input type	Step data input type	CC-Link direct input type	Programless type	Pulse input type
					
Series	LECP6	LECA6	LECPMJ	LECP1	LECPA
Features	Value (Step data) input Standard controller		CC-Link direct input	Capable of setting up operation (step data) without using a PC or teaching box	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)		Step motor (Servo/24 VDC)	
Maximum number of step data	64 points			14 points	—
Power supply voltage	24 VDC				
Reference page	Page 560	Page 560	Page 600	Page 576	Page 590

Specifications

Step Motor (Servo/24 VDC)

Model			LEFS16			LEFS25			LEFS32			LEFS40		
Stroke [mm] Note 1)			50 to 500			50 to 800			50 to 1000			150 to 1200		
Work load [kg] Note 2)	Horizontal	LECP6/LECP1/LECPMJ	14	15	12	25	30	20	45	50	25	55	65	
	Vertical	LECPA	9	10	10	20	20	15	40	45	20	50	60	
Controller type: LECP6, LECP1, LECPMJ	Speed [mm/s] Note 2)	Stroke range	2	4	0.5	7.5	15	4	10	20	2	2	23	
			Up to 500	10 to 700	5 to 360	20 to 1100	12 to 750	6 to 400	24 to 1200	16 to 800	8 to 520	30 to 1200	20 to 1000	10 to 300
			501 to 600	—	—	20 to 900	12 to 540	6 to 270	24 to 1200	16 to 800	8 to 400	30 to 1200	20 to 1000	10 to 300
			601 to 700	—	—	20 to 630	12 to 420	6 to 230	24 to 930	16 to 620	8 to 310	30 to 1200	20 to 900	10 to 300
			701 to 800	—	—	20 to 550	12 to 330	6 to 180	24 to 750	16 to 500	8 to 250	30 to 1140	20 to 760	10 to 300
			801 to 900	—	—	—	—	—	24 to 610	16 to 410	8 to 200	30 to 930	20 to 620	10 to 300
			901 to 1000	—	—	—	—	—	24 to 500	16 to 340	8 to 170	30 to 780	20 to 520	10 to 250
			1001 to 1100	—	—	—	—	—	—	—	—	30 to 660	20 to 440	10 to 220
Driver type: LECPA	Speed [mm/s] Note 2)	Stroke range	1101 to 1200	—	—	—	—	—	—	—	—	30 to 570	20 to 380	10 to 190
			Up to 500	10 to 500	5 to 250	20 to 1000	12 to 500	6 to 250	24 to 1200	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			501 to 600	—	—	20 to 900	12 to 500	6 to 250	24 to 1200	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			601 to 700	—	—	20 to 630	12 to 420	6 to 230	24 to 930	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			701 to 800	—	—	20 to 550	12 to 330	6 to 180	24 to 750	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			801 to 900	—	—	—	—	—	24 to 610	16 to 410	8 to 200	30 to 500	20 to 500	10 to 250
			901 to 1000	—	—	—	—	—	24 to 500	16 to 340	8 to 170	30 to 500	20 to 500	10 to 250
			1001 to 1100	—	—	—	—	—	—	—	—	30 to 500	20 to 440	10 to 220
1101 to 1200	—	—	—	—	—	—	—	—	—	30 to 500	20 to 380	10 to 190		
Max. acceleration/deceleration [mm/s ²]			3000											
Positioning repeatability [mm]		Basic type	±0.02											
		High precision type	±0.015 (Lead H: ±0.02)											
Lost motion [mm] Note 3)			Basic type	0.1 or less										
			High precision type	0.05 or less										
Lead [mm]			10	5	20	12	6	24	16	8	30	20	10	
Impact/Vibration resistance [m/s ²] Note 4)			50/20											
Actuation type			Ball screw (LEFS□), Ball screw + Belt (LEFS□ ^B)											
Guide type			Linear guide											
Operating temperature range [°C]			5 to 40											
Operating humidity range [%RH]			90 or less (No condensation)											
Motor size			□28		□42		□56.4							
Motor type			Step motor (Servo/24 VDC)											
Encoder			Incremental A/B phase (800 pulse/rotation)											
Rated voltage [V]			24 VDC ±10%											
Power consumption [W] Note 5)			22		38		50		100					
Standby power consumption when operating [W] Note 6)			18		16		44		43					
Max. instantaneous power consumption [W] Note 7)			51		57		123		141					
Type Note 8)			Non-magnetizing lock											
Holding force [N]			20	39	47	78	157	72	108	216	75	113	225	
Power consumption [W] Note 9)			2.9		5		5		5					
Rated voltage [V]			24 VDC ±10%											

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) Speed changes according to the controller/driver type and work load. Check "Speed-Work Load Graph (Guide)" on pages 39 and 40.

Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m.

Note 3) A reference value for correcting an error in reciprocal operation.

Note 4) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 5) The power consumption (including the controller) is for when the actuator is operating.

Note 6) The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation.

Note 7) The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.

Note 8) With lock only

Note 9) For an actuator with lock, add the power consumption for the lock.

Specifications

Servo Motor (24 VDC)

Model			LEFS16A			LEFS25A		
Actuator specifications	Stroke [mm] ^{Note 1)}		50 to 500			50 to 800		
	Work load [kg] ^{Note 2)}	Horizontal	7	10	5	11	18	
		Vertical	2	4	1	2.5	5	
		Up to 500	1 to 500	1 to 250	2 to 800	2 to 500	1 to 250	
		501 to 600	—	—				
	Speed [mm/s] ^{Note 2)}	601 to 700	—	—	2 to 630	2 to 420	1 to 230	
	Stroke range	701 to 800	—	—	2 to 550	2 to 330	1 to 180	
	Max. acceleration/deceleration [mm/s ²]		3000					
	Positioning repeatability [mm]	Basic type	±0.02					
		High precision type	±0.015 (Lead H: ±0.02)					
Lost motion [mm] ^{Note 3)}	Basic type	0.1 or less						
	High precision type	0.05 or less						
Lead [mm]		10	5	20	12	6		
Impact/Vibration resistance [m/s ²] ^{Note 4)}		50/20						
Actuation type		Ball screw (LEFS□), Ball screw + Belt (LEFS□ ^R)						
Guide type		Linear guide						
Operating temperature range [°C]		5 to 40						
Operating humidity range [%RH]		90 or less (No condensation)						
Electric specifications	Motor size	□28			□42			
	Motor output [W]	30			36			
	Motor type	Servo motor (24 VDC)						
	Encoder	Incremental A/B (800 pulse/rotation)/Z phase						
	Rated voltage [V]	24 VDC ±10%						
	Power consumption [W] ^{Note 5)}	63		102				
	Standby power consumption when operating [W] ^{Note 6)}	Horizontal 4/Vertical 9						
	Max. instantaneous power consumption [W] ^{Note 7)}	70		113				
	Type ^{Note 8)}	Non-magnetizing lock						
	Holding force [N]	20	39	47	78	157		
Lock unit specifications	Power consumption [W] ^{Note 9)}	2.9		5				
	Rated voltage [V]	24 VDC ±10%						

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) Check "Speed-Work Load Graph (Guide)" on page 42 for details.

Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m.

Note 3) A reference value for correcting an error in reciprocal operation.

Note 4) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 5) The power consumption (including the controller) is for when the actuator is operating.

Note 6) The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation.

Note 7) The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.

Note 8) With lock only

Note 9) For an actuator with lock, add the power consumption for the lock.

Weight

Series	LEFS16									
Stroke [mm]	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	0.83	0.90	0.98	1.05	1.13	1.20	1.28	1.35	1.43	1.50
Additional weight with lock [kg]	0.12									

Series	LEFS25															
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Product weight [kg]	1.70	1.84	1.98	2.12	2.26	2.40	2.54	2.68	2.82	2.96	3.10	3.24	3.38	3.52	3.66	3.80
Additional weight with lock [kg]	0.26															

Series	LEFS32																			
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Product weight [kg]	3.15	3.35	3.55	3.75	3.95	4.15	4.35	4.55	4.75	4.95	5.15	5.35	5.55	5.75	5.95	6.15	6.35	6.55	6.75	6.95
Additional weight with lock [kg]	0.53																			


Series	LEFS40																					
Stroke [mm]	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200		
Product weight [kg]	5.37	5.65	5.93	6.21	6.49	6.77	7.15	7.33	7.61	7.89	8.17	8.45	8.73	9.01	9.29	9.57	9.85	10.13	10.69	11.25		
Additional weight with lock [kg]	0.53																					

LEFS Series


Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

Construction: In-line Motor

LEFS16, 25, 32

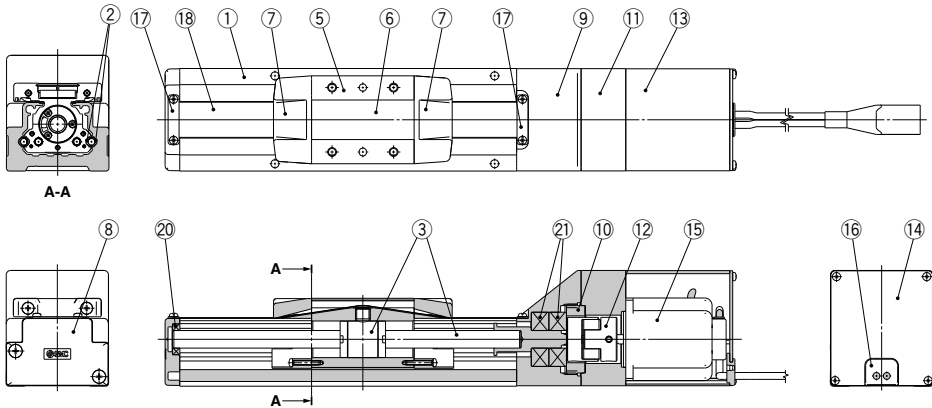


LEFS40

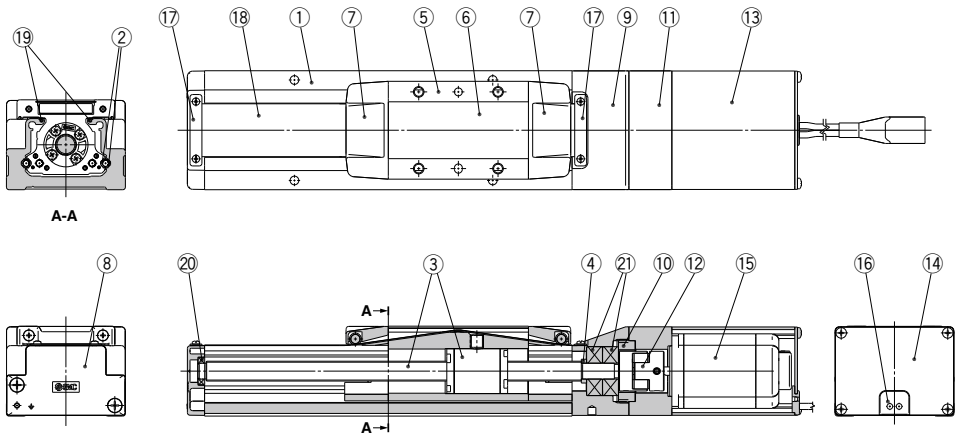

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Rail guide	—	
3	Ball screw assembly	—	
4	Spacer	LEFS40	—
5	Table	Aluminum alloy	Anodized
6	Blanking plate	Aluminum alloy	Anodized
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminum die-casted	Coating
9	Housing B	Aluminum die-casted	Coating
10	Bearing stopper	Aluminum alloy	
11	Motor mount	Aluminum alloy	Coating

No.	Description	Material	Note
12	Coupling	—	
13	Motor cover	Aluminum alloy	Anodized
14	End cover	Aluminum alloy	Anodized
15	Motor	—	
16	Rubber bushing	NBR	
17	Band stopper	Stainless steel	
18	Dust seal band	Stainless steel	
19	Seal magnet	—	
20	Bearing	—	
21	Bearing	—	

Construction: Motor Parallel

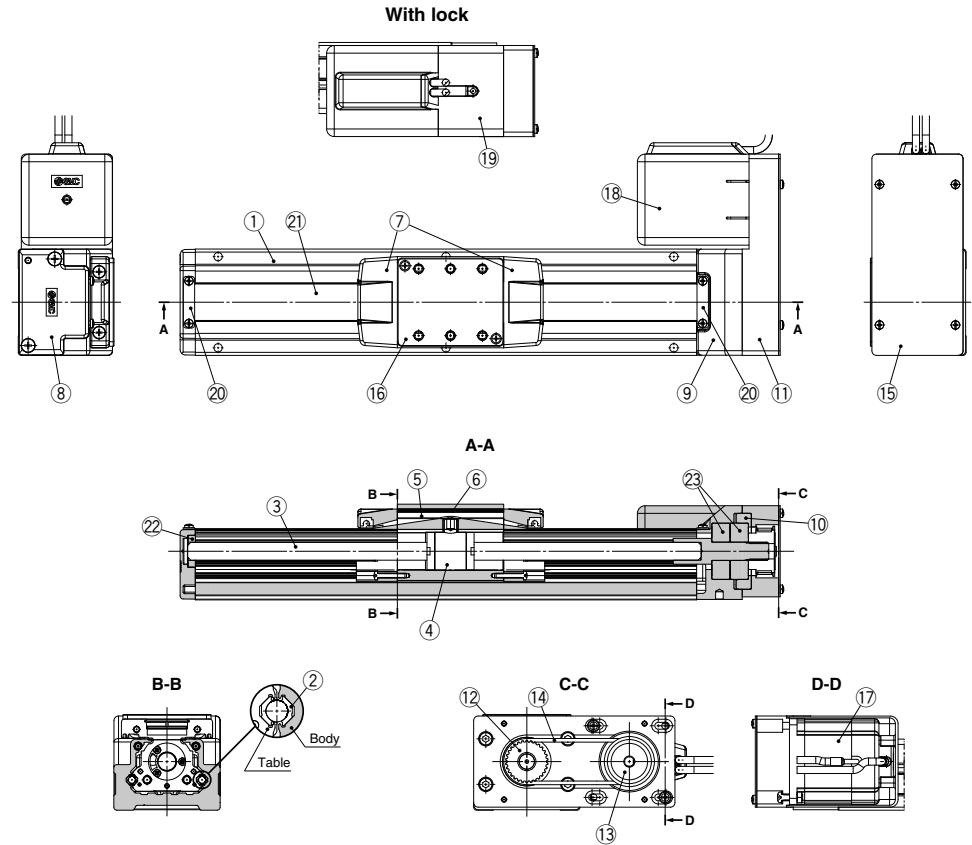

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Rail guide	—	
3	Ball screw shaft	—	
4	Ball screw nut	—	
5	Table	Aluminum alloy	Anodized
6	Blanking plate	Aluminum alloy	Anodized
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminum die-casted	Coating
9	Housing B	Aluminum die-casted	Coating
10	Bearing stopper	Aluminum alloy	
11	Return plate	Aluminum alloy	Coating
12	Pulley	Aluminum alloy	
13	Pulley	Aluminum alloy	

No.	Description	Material	Note
15	Cover plate	Aluminum alloy	Coating
16	Table spacer	Aluminum alloy	Coating (LEFS32 only)
17	Motor	—	
18	Motor cover	Synthetic resin	
19	Motor cover with lock	Aluminum alloy	Anodized
20	Band stopper	Stainless steel	
21	Dust seal band	Stainless steel	
22	Bearing	—	
23	Bearing	—	

Replacement Parts/Belt

No.	Size	Order no.
14	16	LE-D-6-1
	25	LE-D-6-2
	32	LE-D-6-3
	40	LE-D-6-4


LEFS Series

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

Dimensions: In-line Motor

LEFS16

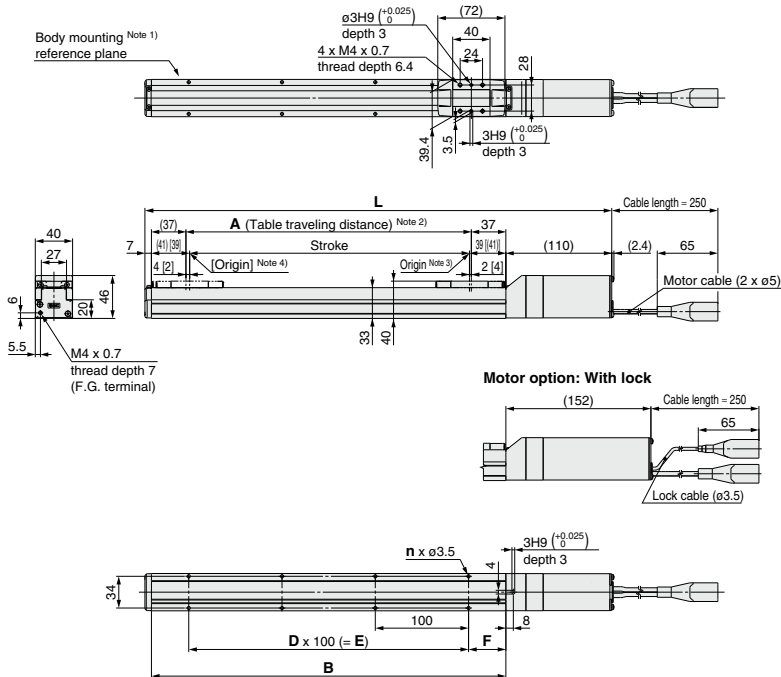

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 2 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) Position after return to origin


Note 4) [] for when the direction of return to origin has changed.

Dimensions

Model	L		A	B	n	D	E	F
	Without lock	With lock						
LEFS16□-50□	247	289	56	130	4	—	—	15
LEFS16□-100□	297	339	106	180	4	—	—	40
LEFS16□-150□	347	389	156	230	4	—	—	
LEFS16□-200□	397	439	206	280	6	2	200	
LEFS16□-250□	447	489	256	330	6	2	200	
LEFS16□-300□	497	539	306	380	8	3	300	
LEFS16□-350□	547	589	356	430	8	3	300	
LEFS16□-400□	597	639	406	480	10	4	400	
LEFS16□-450□	647	689	456	530	10	4	400	
LEFS16□-500□	697	739	506	580	12	5	500	

Dimensions: In-line Motor

LEFS25

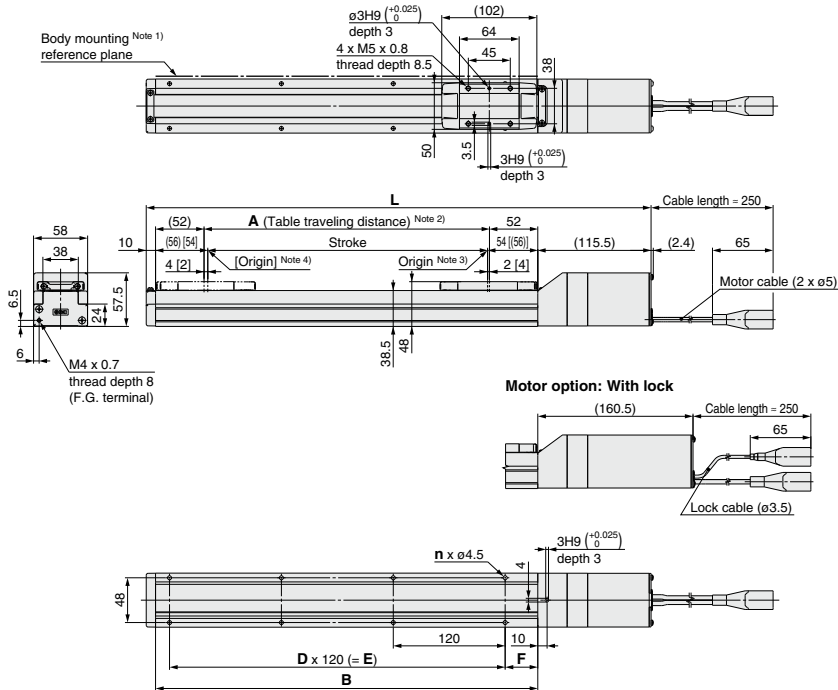

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) Position after return to origin


Note 4) [] for when the direction of return to origin has changed.

Dimensions

Model	L		A	B	n	D	E	F	(mm)
	Without lock	With lock							
LEFS25□-50□	285.5	330.5	56	160	4	—	—	20	35
LEFS25□-100□	335.5	380.5	106	210	4	—	—		
LEFS25□-150□	385.5	430.5	156	260	4	—	—		
LEFS25□-200□	435.5	480.5	206	310	6	2	240		
LEFS25□-250□	485.5	530.5	256	360	6	2	240		
LEFS25□-300□	535.5	580.5	306	410	8	3	360		
LEFS25□-350□	585.5	630.5	356	460	8	3	360		
LEFS25□-400□	635.5	680.5	406	510	8	3	360		
LEFS25□-450□	685.5	730.5	456	560	10	4	480		
LEFS25□-500□	735.5	780.5	506	610	10	4	480		
LEFS25□-550□	785.5	830.5	556	660	12	5	600		
LEFS25□-600□	835.5	880.5	606	710	12	5	600		
LEFS25□-650□	885.5	930.5	656	760	12	5	600		
LEFS25□-700□	935.5	980.5	706	810	14	6	720		
LEFS25□-750□	985.5	1030.5	756	860	14	6	720		
LEFS25□-800□	1035.5	1080.5	806	910	16	7	840		

Dimensions: In-line Motor

LEFS32

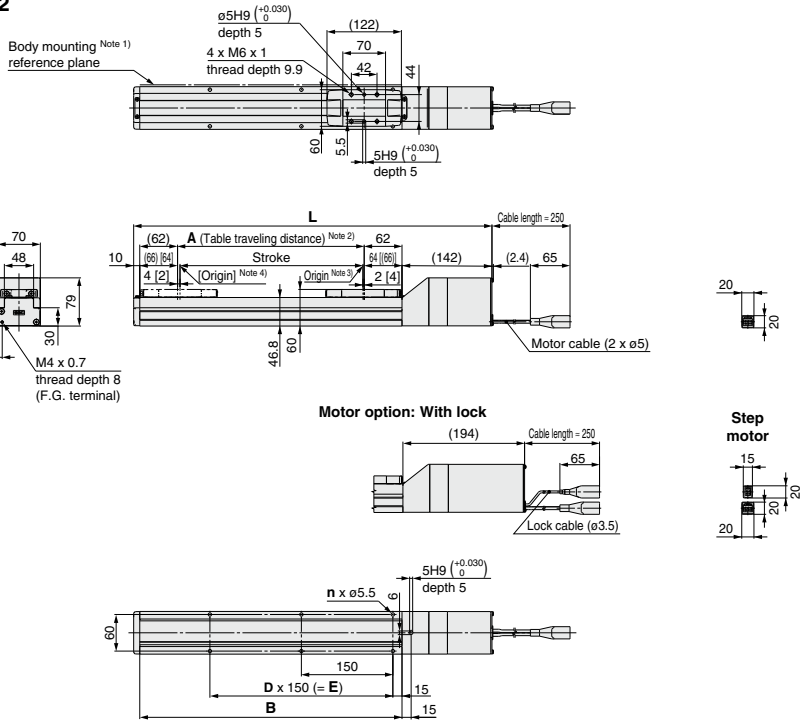

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) Position after return to origin

Note 4) [] for when the direction of return to origin has changed.

Dimensions

[mm]

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS32□-50□	332	384	56	180	4	—	—
LEFS32□-100□	382	434	106	230	4	—	—
LEFS32□-150□	432	484	156	280	4	—	—
LEFS32□-200□	482	534	206	330	6	2	300
LEFS32□-250□	532	584	256	380	6	2	300
LEFS32□-300□	582	634	306	430	6	2	300
LEFS32□-350□	632	684	356	480	8	3	450
LEFS32□-400□	682	734	406	530	8	3	450
LEFS32□-450□	732	784	456	580	8	3	450
LEFS32□-500□	782	834	506	630	10	4	600
LEFS32□-550□	832	884	556	680	10	4	600
LEFS32□-600□	882	934	606	730	10	4	600
LEFS32□-650□	932	984	656	780	12	5	750
LEFS32□-700□	982	1034	706	830	12	5	750
LEFS32□-750□	1032	1084	756	880	12	5	750
LEFS32□-800□	1082	1134	806	930	14	6	900
LEFS32□-850□	1132	1184	856	980	14	6	900
LEFS32□-900□	1182	1234	906	1030	14	6	900
LEFS32□-950□	1232	1284	956	1080	16	7	1050
LEFS32□-1000□	1282	1334	1006	1130	16	7	1050

LEFS40



Note 4) [] for when the direction of return to origin has changed.

[mm]

LZ□








LZ□

1 C3E2

LOU 2

Dimensions: Motor Parallel

LEFS16

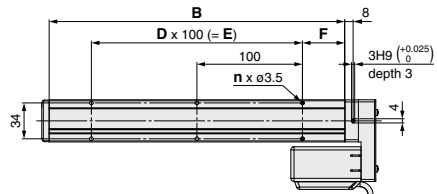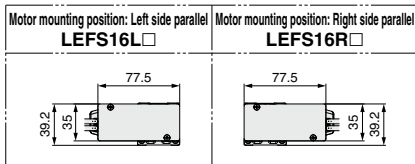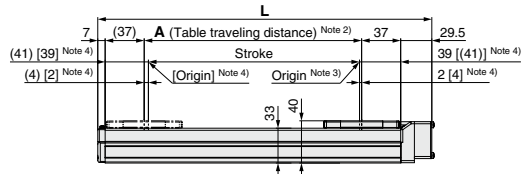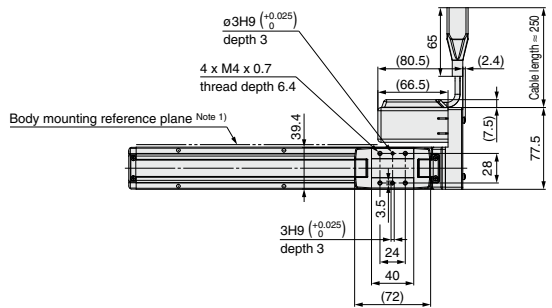

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 2 mm or more. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) Position after return to origin







Note 4) [] for when the direction of return to origin has changed.

Dimensions

Model	L	A	B	n	D	E	F
LEFS16□□-50□	166.5	56	130	4	—	—	15
LEFS16□□-100□	216.5	106	180	4	—	—	—
LEFS16□□-150□	266.5	156	230	4	—	—	—
LEFS16□□-200□	316.5	206	280	6	2	200	—
LEFS16□□-250□	366.5	256	330	6	2	200	—
LEFS16□□-300□	416.5	306	380	8	3	300	40
LEFS16□□-350□	466.5	356	430	8	3	300	—
LEFS16□□-400□	516.5	406	480	10	4	400	—
LEFS16□□-450□	566.5	456	530	10	4	400	—
LEFS16□□-500□	616.5	506	580	12	5	500	—

Dimensions: Motor Parallel

LEFS32R

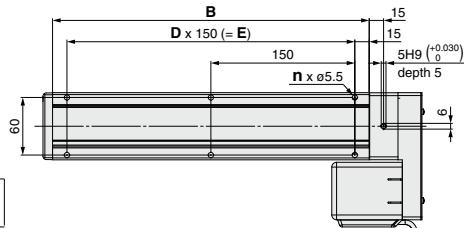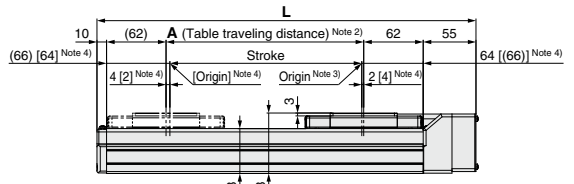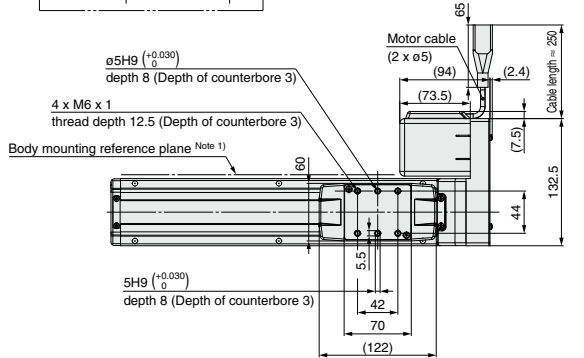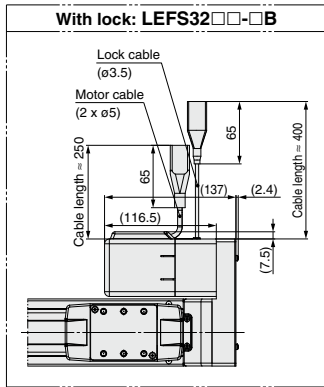

Motor mounting position: Left side parallel LEFS32L□	Motor mounting position: Right side parallel LEFS32R□

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) Position after return to origin

Note 4) [] for when the direction of return to origin has changed.

Dimensions








Model	L	A	B	n	D	E
LEFS32□□-50□	245	56	180	4	—	—
LEFS32□□-100□	295	106	230	4	—	—
LEFS32□□-150□	345	156	280	4	—	—
LEFS32□□-200□	395	206	330	6	2	300
LEFS32□□-250□	445	256	380	6	2	300
LEFS32□□-300□	495	306	430	6	2	300
LEFS32□□-350□	545	356	480	8	3	450
LEFS32□□-400□	595	406	530	8	3	450
LEFS32□□-450□	645	456	580	8	3	450
LEFS32□□-500□	695	506	630	10	4	600

Dimensions

Model	L	A	B	n	D	E
LEFS32□□-550□	745	556	680	10	4	600
LEFS32□□-600□	795	606	730	10	4	600
LEFS32□□-650□	845	656	780	12	5	750
LEFS32□□-700□	895	706	830	12	5	750
LEFS32□□-750□	945	756	880	12	5	750
LEFS32□□-800□	995	806	930	14	6	900
LEFS32□□-850□	1045	856	980	14	6	900
LEFS32□□-900□	1095	906	1030	14	6	900
LEFS32□□-950□	1145	956	1080	16	7	1050
LEFS32□□-1000□	1195	1006	1130	16	7	1050

Dimensions: Motor Parallel

LEFS40R

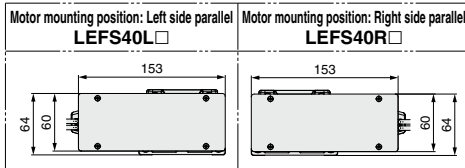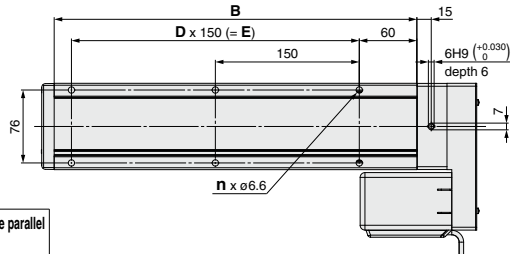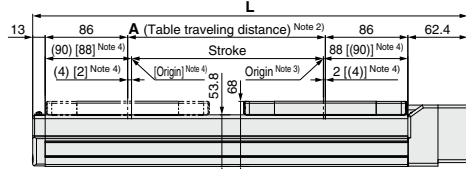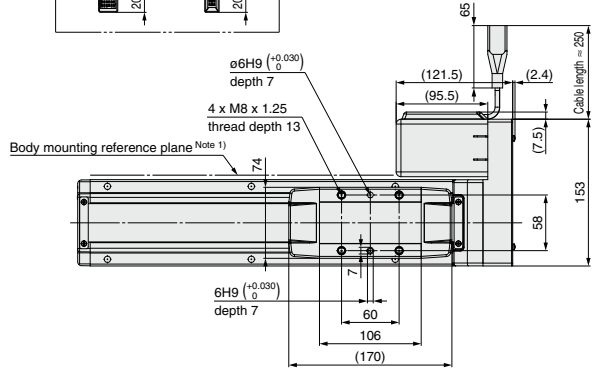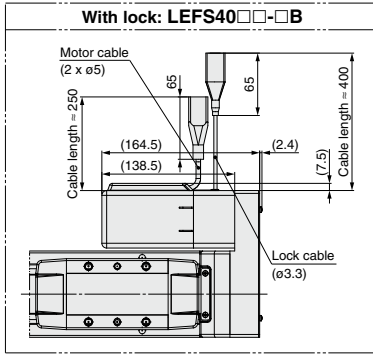

Dimensions

Model	L	A	B	n	D	E
LEFS40□□-150□	403.4	156	328	4	—	150
LEFS40□□-200□	453.4	206	378	6	2	300
LEFS40□□-250□	503.4	256	428	6	2	300
LEFS40□□-300□	553.4	306	478	6	2	300
LEFS40□□-350□	603.4	356	528	8	3	450
LEFS40□□-400□	653.4	406	578	8	3	450
LEFS40□□-450□	703.4	456	628	8	3	450
LEFS40□□-500□	753.4	506	678	10	4	600
LEFS40□□-550□	803.4	556	728	10	4	600
LEFS40□□-600□	853.4	606	778	10	4	600

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) Position after return to origin


Note 4) [] for when the direction of return to origin has changed.

Dimensions

Model	L	A	B	n	D	E
LEFS40□□-650□	903.4	656	828	12	5	750
LEFS40□□-700□	953.4	706	878	12	5	750
LEFS40□□-750□	1003.4	756	928	12	5	750
LEFS40□□-800□	1053.4	806	978	14	6	900
LEFS40□□-850□	1103.4	856	1028	14	6	900
LEFS40□□-900□	1153.4	906	1078	14	6	900
LEFS40□□-950□	1203.4	956	1128	16	7	1050
LEFS40□□-1000□	1253.4	1006	1178	16	7	1050
LEFS40□□-1100□	1353.4	1106	1278	18	8	1200
LEFS40□□-1200□	1453.4	1206	1378	18	8	1200

Electric Actuator/Slider Type Ball Screw Drive

LEFS Series LEFS25, 32, 40



Clean Room Specification ▶ Page 522 Secondary Battery Compatible ▶ Page 540 Motorless Type ▶ Page 792

SSCNET III/IIIH Compatible ▶ Page 632 MECHATROLINK Compatible ▶ Page 672



How to Order

LEFS **H** **32** **R** **S3** **B** - **200** - **S** **2** **A2**

1 2 3 4 5 6 7 8 9 10 11

1 Accuracy

Nil	Basic type
H	High precision type

2 Size

25
32
40

3 Motor mounting position

Nil	In-line
R	Right side parallel
L	Left side parallel

4 Motor type

Symbol	Type	Output [W]	Actuator size	Compatible driver
S2*	AC servo motor (Incremental encoder)	100	25	LECSA□-S1
S3		200	32	LECSA□-S3
S4		400	40	LECSA2-S4
S6*	AC servo motor (Absolute encoder)	100	25	LECSB□-S5 LECSS□-S5 LECSS□-S5
S7		200	32	LECSB□-S7 LECSS□-S7 LECSS□-S7
S8		400	40	LECSB2-S8 LECSS2-S8 LECSS2-S8

* For motor type S2 and S6, the compatible driver part number suffixes are S1 and S5 respectively.

5 Lead [mm]

Symbol	LEFS25	LEFS32	LEFS40
H	20	24	30
A	12	16	20
B	6	8	10

7 Motor option

Nil	Without option
B	With lock

9 Cable length Note 3) [m]

Nil	Without cable
2	2
5	5
A	10

Note 3) The length of the encoder, motor and lock cables are the same.

6 Stroke [mm]

50	50
to	to
1200	1200

* Refer to the applicable stroke table.

8 Cable type Note 1) Note 2)

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

Note 1) Motor cable and encoder cable are included. (Lock cable is also included if motor option "With lock" is selected.)

Note 2) Standard cable entry direction is "(B) Counter axis side". For motor parallel type of the ball screw drive, the cable entry direction is "(A) Axis side".

Support Guide/LEFG Series

A support guide is designed to support workpieces with significant overhang.

Page 86



10 Driver type

	Compatible driver	Power supply voltage [V]	Size
			25 32 40
Nil	Without driver	—	● ● ●
A1	LECSA1-S□	100 to 120	● ● ●
A2	LECSA2-S□	200 to 230	● ● ●
B1	LECSB1-S□	100 to 120	● ● ●
B2	LECSB2-S□	200 to 230	● ● ●
C1	LECSS1-S□	100 to 120	● ● ●
C2	LECSS2-S□	200 to 230	● ● ●
S1	LECSS1-S□	100 to 120	● ● ●
S2	LECSS2-S□	200 to 230	● ● ●

* When the driver type is selected, the cable is included. Select cable type and cable length.

Example)

S2S2: Standard cable (2 m) + Driver (LECSS2)

S2: Standard cable (2 m)

Nil: Without cable and driver

11 I/O cable length [m] Note 4)

Nil	Without cable
H	Without cable (Connector only)
1	1.5

Note 4) When "Without driver" is selected for driver type, only

"Nil: Without cable" can be selected.

Refer to page 624 if I/O cable is required.

(Options are shown on page 624.)

Applicable Stroke Table

Model	Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
LEFS25		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LEFS32		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LEFS40		—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

* Please consult with SMC for non-standard strokes as they are produced as special orders.

Compatible Driver

Driver type	Pulse input type /Positioning type	Pulse input type	CC-Link direct input type	SSCNET III type
Series	LECSA	LECSB	LECSA	LECSS
Number of point tables	Up to 7	—	Up to 255 (2 stations occupied)	—
Pulse input	○	○	—	—
Applicable network	—	—	CC-Link	SSCNET III
Control encoder	Incremental 17-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder
Communication function	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication
Power supply voltage [V]	—	100 to 120 VAC (50/60 Hz), 200 to 230 VAC (50/60 Hz)	—	—
Reference page	—	—	—	—

Page 607

Specifications

AC Servo Motor

Model			LEFS25S ²			LEFS32S ³			LEFS40S ⁴		
Stroke [mm] ^{Note 1)}			50 to 800			50 to 1000			150 to 1200		
Work load [kg] ^{Note 2)}		Horizontal	10	20	20	30	40	45	30	50	60
		Vertical	4	8	15	5	10	20	7	15	30
Max. speed [mm/s] ^{Note 3)}	Stroke range	Up to 400	1500	900	450	1500	1000	500	1500	1000	500
		401 to 500	1200	720	360	1500	1000	500	1500	1000	500
		501 to 600	900	540	270	1200	800	400	1500	1000	500
		601 to 700	700	420	210	930	620	310	1410	940	470
		701 to 800	550	330	160	750	500	250	1140	760	380
		801 to 900	—	—	—	610	410	200	930	620	310
		901 to 1000	—	—	—	510	340	170	780	520	260
		1001 to 1100	—	—	—	—	—	—	500	440	220
1101 to 1200		—	—	—	—	—	—	500	380	190	
Max. acceleration/deceleration [mm/s ²]			20000 (Refer to pages 48 to 50 for limit according to work load and duty ratio.)								
Positioning repeatability [mm]		Basic type	±0.02								
		High precision type	±0.01								
Lost motion [mm] ^{Note 4)}		Basic type	0.1 or less								
		High precision type	0.05 or less								
Lead [mm]			20	12	6	24	16	8	30	20	10
Impact/Vibration resistance [m/s ²] ^{Note 5)}			50/20								
Actuation type			Ball screw (LEFS□), Ball screw + Belt (LEFS□ ^h)								
Guide type			Linear guide								
Operating temperature range [°C]			5 to 40								
Operating humidity range [%RH]			90 or less (No condensation)								
Motor output/Size			100 W/□40			200 W/□60			400 W/□60		
Motor type			AC servo motor (100/200 VAC)								
Encoder			Motor type S2, S3, S4: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type S6, S7, S8: Absolute 18-bit encoder (Resolution: 262144 p/rev)								
Power consumption [W] ^{Note 6)}	Horizontal	45			65			210			
	Vertical	145			175			230			
Standby power consumption when operating [W] ^{Note 7)}	Horizontal	2			2			2			
	Vertical	8			8			18			
Max. instantaneous power consumption [W] ^{Note 8)}			445			725			1275		
Type ^{Note 9)}			Non-magnetizing lock								
Holding force [N]			78	131	255	131	197	385	220	330	660
Power consumption at 20°C [W] ^{Note 10)}			6.3			7.9			7.9		
Rated voltage [V]			24 VDC ±10%								

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) For details, refer to "Speed-Work Load Graph (Guide)" on page 47.

Note 3) The allowable speed changes according to the stroke.

Note 4) A reference value for correcting an error in reciprocal operation.

Note 5) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000

Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 6) The power consumption (including the driver) is for when the actuator is operating.

Note 7) The standby power consumption when operating (including the driver) is for when the actuator is stopped in the set position during the operation.

Note 8) The maximum instantaneous power consumption (including the driver) is for when the actuator is operating.

Note 9) Only when motor option "With lock" is selected.

Note 10) For an actuator with lock, add the power consumption for the lock.

Weight


Series		LEFS25S□															
Stroke [mm]		50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Motor type	S2	2.00	2.14	2.28	2.44	2.56	2.69	2.84	2.99	3.12	3.24	3.40	3.54	3.68	3.82	3.96	4.14
	S6	2.06	2.20	2.34	2.50	2.62	2.75	2.90	3.05	3.18	3.30	3.46	3.60	3.74	3.88	4.02	4.20
Additional weight with lock [kg]		S2: 0.2/S6: 0.3															

Series		LEFS32S□																			
Stroke [mm]		50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Motor type	S3	3.40	3.60	3.80	4.00	4.20	4.40	4.60	4.80	5.00	5.20	5.40	5.60	5.80	6.00	6.20	6.40	6.60	6.80	7.00	7.20
	S7	3.34	3.54	3.74	3.94	4.14	4.34	4.54	4.74	4.94	5.14	5.34	5.54	5.74	5.94	6.14	6.34	6.54	6.74	6.94	7.14
Additional weight with lock [kg]		S3: 0.4/S7: 0.7																			

Series		LEFS40S□																			
Stroke [mm]		150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
Motor type	S4	5.82	6.10	6.38	6.65	6.95	7.25	7.51	7.80	8.07	8.25	8.63	8.90	9.20	9.45	9.76	10.05	10.32	10.60	11.16	11.72
	S8	5.92	6.20	6.48	6.75	7.05	7.35	7.61	7.90	8.17	8.35	8.73	9.00	9.30	9.55	9.86	10.15	10.42	10.70	11.26	11.82
Additional weight with lock [kg]		S4: 0.7/S8: 0.7																			

Construction

In-line motor

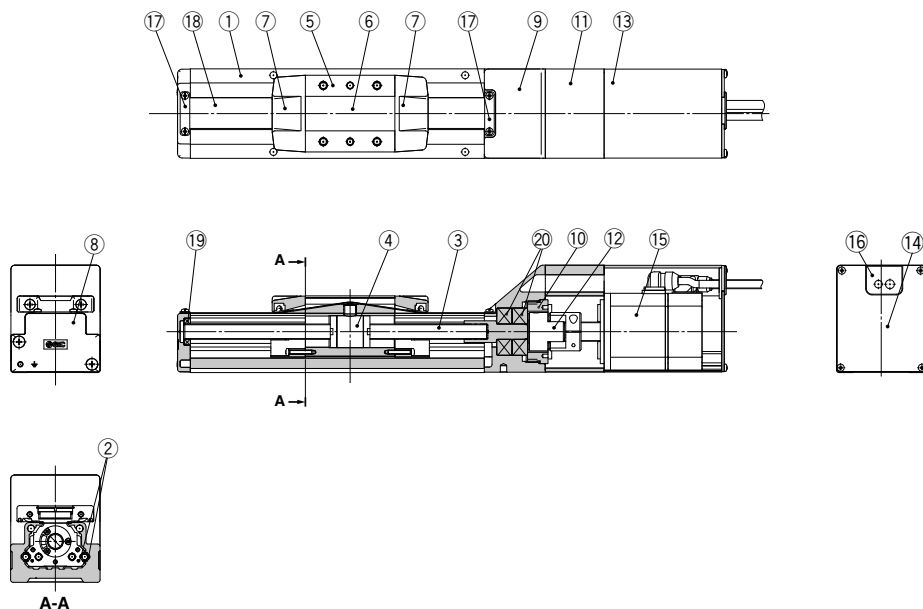


Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Rail guide	—	
3	Ball screw shaft	—	
4	Ball screw nut	—	
5	Table	Aluminum alloy	Anodized
6	Blanking plate	Aluminum alloy	Anodized
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminum die-cast	Coating
9	Housing B	Aluminum die-cast	Coating
10	Bearing stopper	Aluminum alloy	

No.	Description	Material	Note
11	Motor mount	Aluminum alloy	Coating
12	Coupling	—	
13	Motor cover	Aluminum alloy	Anodized
14	Motor end cover	Aluminum alloy	Anodized
15	Motor	—	
16	Grommet	NBR	
17	Band stopper	Stainless steel	
18	Dust seal band	Stainless steel	
19	Bearing	—	
20	Bearing	—	

Construction

Motor parallel

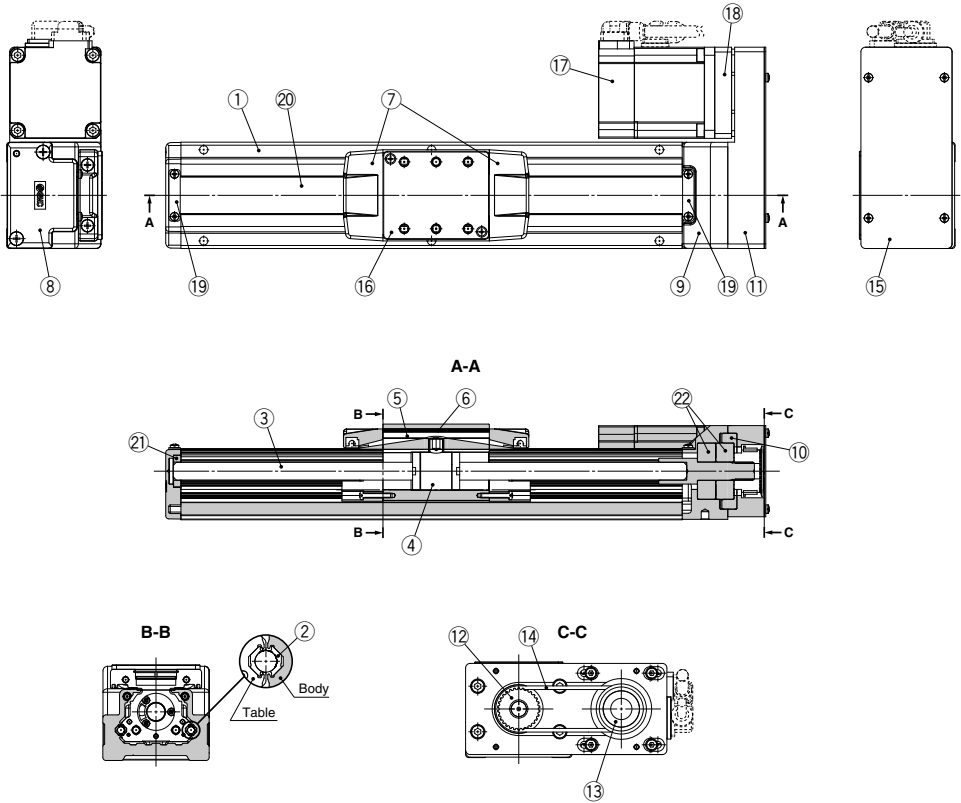

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Rail guide	—	
3	Ball screw shaft	—	
4	Ball screw nut	—	
5	Table	Aluminum alloy	Anodized
6	Blanking plate	Aluminum alloy	Anodized
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminum die-casted	Coating
9	Housing B	Aluminum die-casted	Coating
10	Bearing stopper	Aluminum alloy	
11	Return plate	Aluminum alloy	Coating
12	Pulley	Aluminum alloy	
13	Pulley	Aluminum alloy	
15	Cover plate	Aluminum alloy	Coating
16	Table spacer	Aluminum alloy	Coating (LEFS32 only)

No.	Description	Material	Note
17	Motor (Absolute encoder)	—	
	Motor (Incremental encoder)		
18	Motor adapter	Aluminum alloy	Anodized
19	Band stopper	Stainless steel	
20	Dust seal band	Stainless steel	
21	Bearing	—	
22	Bearing	—	

Replacement Parts/Belt

No.	Size	Order no.
14	25	LE-D-6-2
	32	LE-D-6-3
	40	LE-D-6-4

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-LEFS

11-LEJS

25A-

LEC

LEC

S

LEC

SS-T

LEC

Y

Motor-

less


LAT

LZ

LC3F2

Dimensions: In-line Motor

LEFS25

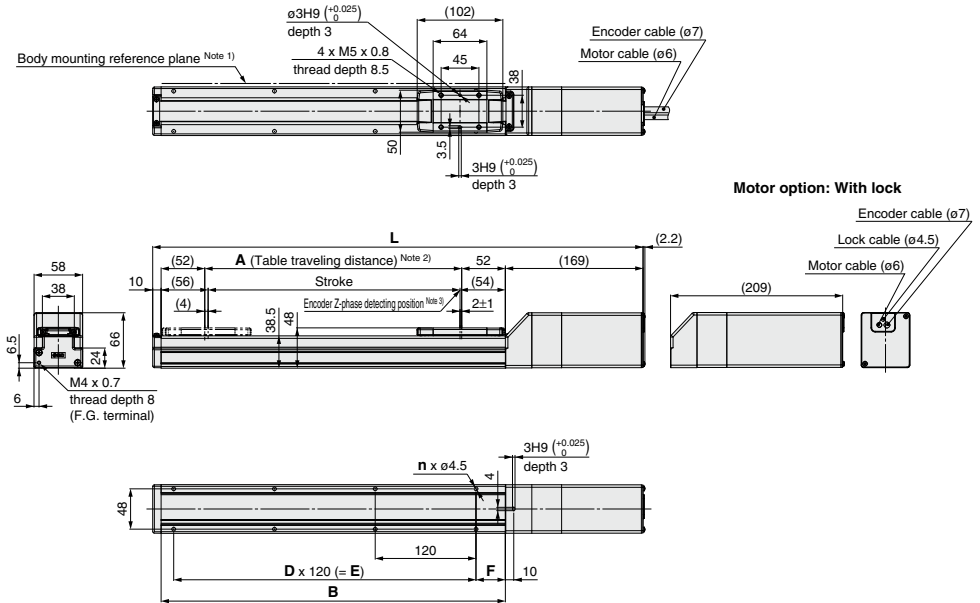

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) The Z-phase first detecting position from the stroke end of the motor side.


Dimensions

[mm]

Model	L		A	B	n	D	E	F
	Without lock	With lock						
LEFS25□□-50□	339	379	56	160	4	—	—	20
LEFS25□□-100□	389	429	106	210	4	—	—	
LEFS25□□-150□	439	479	156	260	4	—	—	
LEFS25□□-200□	489	529	206	310	6	2	240	
LEFS25□□-250□	539	579	256	360	6	2	240	
LEFS25□□-300□	589	629	306	410	8	3	360	
LEFS25□□-350□	639	679	356	460	8	3	360	
LEFS25□□-400□	689	729	406	510	8	3	360	
LEFS25□□-450□	739	779	456	560	10	4	480	35
LEFS25□□-500□	789	829	506	610	10	4	480	
LEFS25□□-550□	839	879	556	660	12	5	600	
LEFS25□□-600□	889	929	606	710	12	5	600	
LEFS25□□-650□	939	979	656	760	12	5	600	
LEFS25□□-700□	989	1029	706	810	14	6	720	
LEFS25□□-750□	1039	1079	756	860	14	6	720	
LEFS25□□-800□	1089	1129	806	910	16	7	840	

Dimensions: In-line Motor

LEFS32

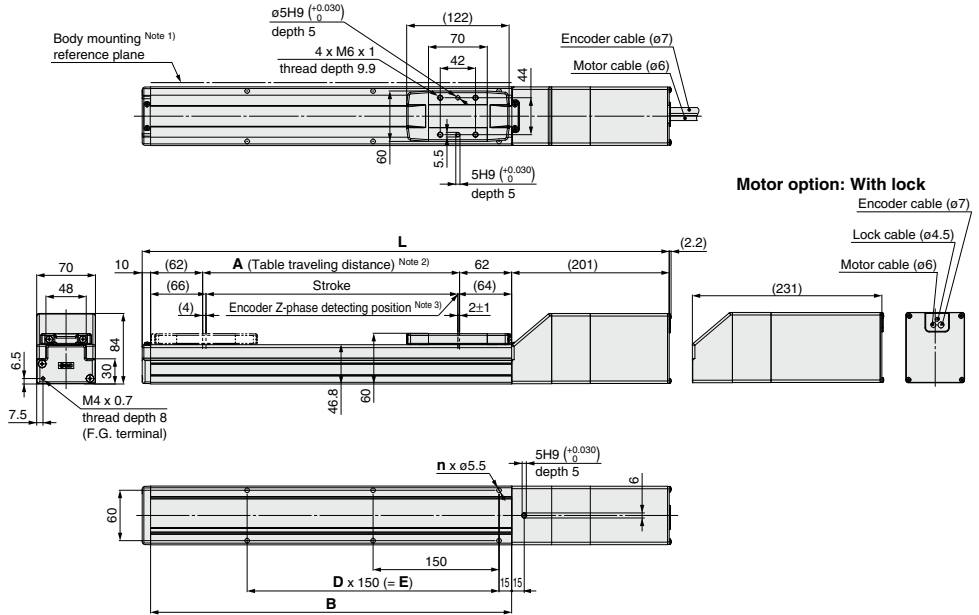


- Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)
- Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.
- Note 3) The Z-phase first detecting position from the stroke end of the motor side.

Dimensions

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS32□□-50□	391	421	56	180	4	—	—
LEFS32□□-100□	441	471	106	230	4	—	—
LEFS32□□-150□	491	521	156	280	4	—	—
LEFS32□□-200□	541	571	206	330	6	2	300
LEFS32□□-250□	591	621	256	380	6	2	300
LEFS32□□-300□	641	671	306	430	6	2	300
LEFS32□□-350□	691	721	356	480	8	3	450
LEFS32□□-400□	741	771	406	530	8	3	450
LEFS32□□-450□	791	821	456	580	8	3	450
LEFS32□□-500□	841	871	506	630	10	4	600
LEFS32□□-550□	891	921	556	680	10	4	600
LEFS32□□-600□	941	971	606	730	10	4	600
LEFS32□□-650□	991	1021	656	780	12	5	750
LEFS32□□-700□	1041	1071	706	830	12	5	750
LEFS32□□-750□	1091	1121	756	880	12	5	750
LEFS32□□-800□	1141	1171	806	930	14	6	900
LEFS32□□-850□	1191	1221	856	980	14	6	900
LEFS32□□-900□	1241	1271	906	1030	14	6	900
LEFS32□□-950□	1291	1321	956	1080	16	7	1050
LEFS32□□-1000□	1341	1371	1006	1130	16	7	1050

Dimensions: In-line Motor

LEFS40

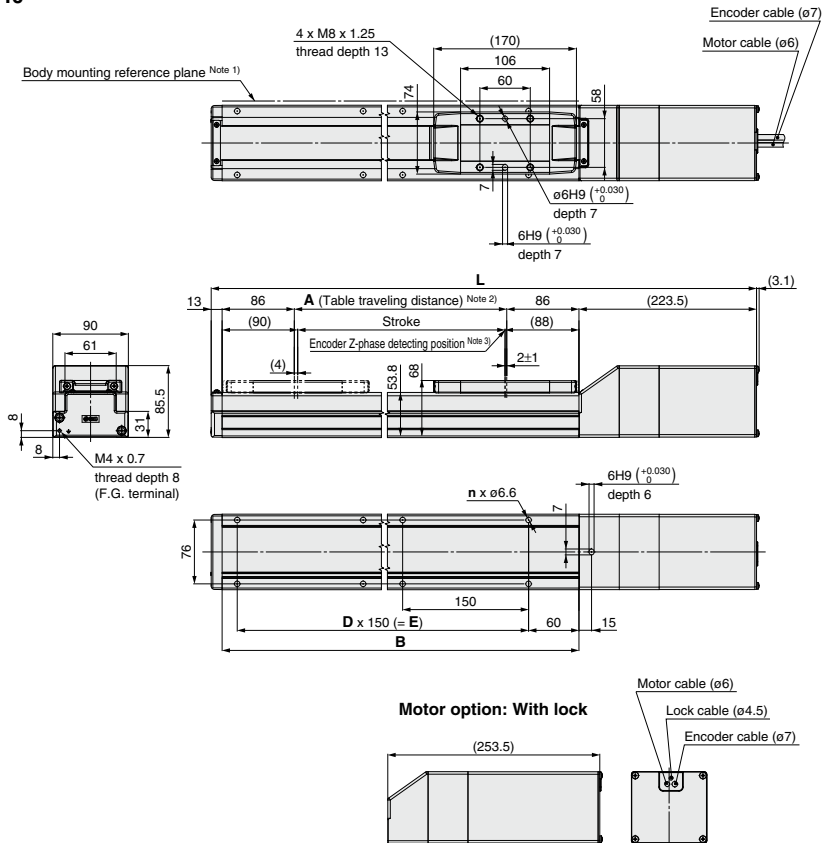

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.




Note 3) The Z-phase first detecting position from the stroke end of the motor side.

Dimensions

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS40□□-150□	564.5	594.5	156	328	4	—	150
LEFS40□□-200□	614.5	644.5	206	378	6	2	300
LEFS40□□-250□	664.5	694.5	256	428	6	2	300
LEFS40□□-300□	714.5	744.5	306	478	6	2	300
LEFS40□□-350□	764.5	794.5	356	528	8	3	450
LEFS40□□-400□	814.5	844.5	406	578	8	3	450
LEFS40□□-450□	864.5	894.5	456	628	8	3	450
LEFS40□□-500□	914.5	944.5	506	678	10	4	600
LEFS40□□-550□	964.5	994.5	556	728	10	4	600
LEFS40□□-600□	1014.5	1044.5	606	778	10	4	600
LEFS40□□-650□	1064.5	1094.5	656	828	12	5	750
LEFS40□□-700□	1114.5	1144.5	706	878	12	5	750
LEFS40□□-750□	1164.5	1194.5	756	928	12	5	750
LEFS40□□-800□	1214.5	1244.5	806	978	14	6	900
LEFS40□□-850□	1264.5	1294.5	856	1028	14	6	900
LEFS40□□-900□	1314.5	1344.5	906	1078	14	6	900
LEFS40□□-950□	1364.5	1394.5	956	1128	16	7	1050
LEFS40□□-1000□	1414.5	1444.5	1006	1178	16	7	1050
LEFS40□□-1100□	1514.5	1544.5	1106	1278	18	8	1200
LEFS40□□-1200□	1614.5	1644.5	1206	1378	18	8	1200

Dimensions: Motor Parallel

LEFS25R

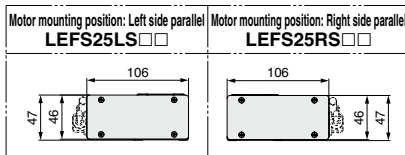

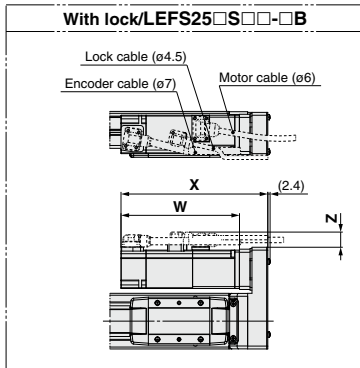


Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more.
(Recommended height 5 mm)

Note 2) The Z-phase first detecting position from the stroke end of the motor side. Please consult with SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

Motor Dimensions

Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
S2	116.5	153.4	87	123.9	14.1	15.8
S6	111.9	153	82.4	123.5	14.1	15.8

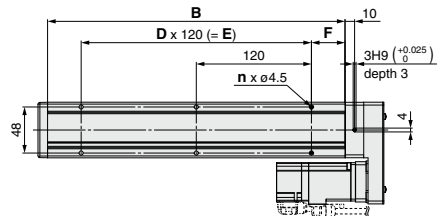
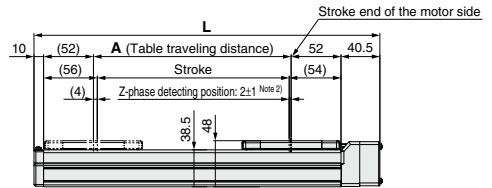
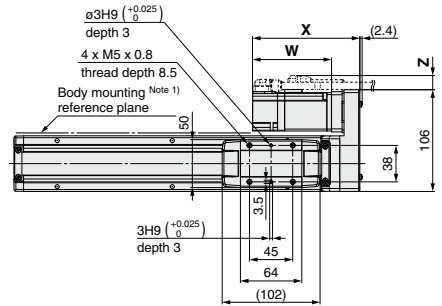


Dimensions

Model	L	A	B	n	D	E	F
LEFS25□S□-50□	210.5	56	160	4	—	—	20
LEFS25□S□-100□	260.5	106	210	4	—	—	—
LEFS25□S□-150□	310.5	156	260	4	—	—	—
LEFS25□S□-200□	360.5	206	310	6	2	240	—
LEFS25□S□-250□	410.5	256	360	6	2	240	—
LEFS25□S□-300□	460.5	306	410	8	3	360	—
LEFS25□S□-350□	510.5	356	460	8	3	360	—
LEFS25□S□-400□	560.5	406	510	8	3	360	—
LEFS25□S□-450□	610.5	456	560	10	4	480	35
LEFS25□S□-500□	660.5	506	610	10	4	480	—
LEFS25□S□-550□	710.5	556	660	12	5	600	—
LEFS25□S□-600□	760.5	606	710	12	5	600	—
LEFS25□S□-650□	810.5	656	760	12	5	600	—
LEFS25□S□-700□	860.5	706	810	14	6	720	—
LEFS25□S□-750□	910.5	756	860	14	6	720	—
LEFS25□S□-800□	960.5	806	910	16	7	840	—

Dimensions: Motor Parallel

LEFS32R

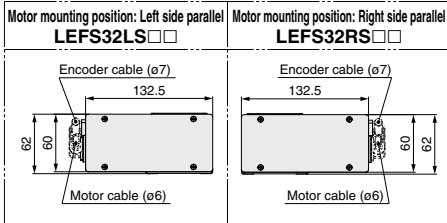

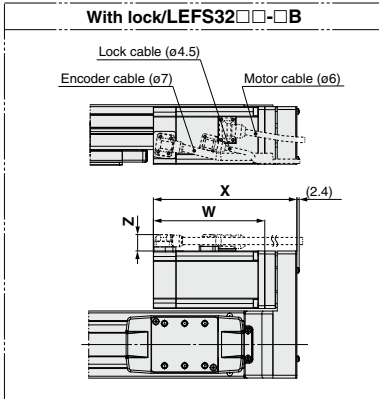


Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more.
(Recommended height 5 mm)

Note 2) The Z-phase first detecting position from the stroke end of the motor side. Please consult with SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

Motor Dimensions

Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
S3	121.7	150.3	88.2	116.8	17.1	17.1
S7	110.1	149.6	76.6	116.1	17.1	17.1

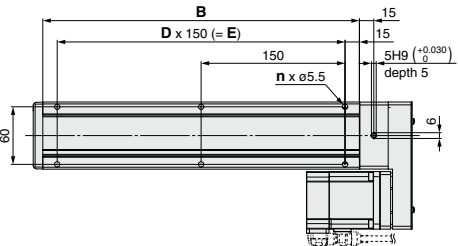
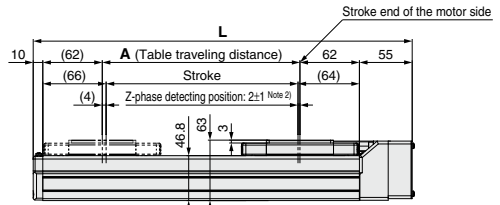
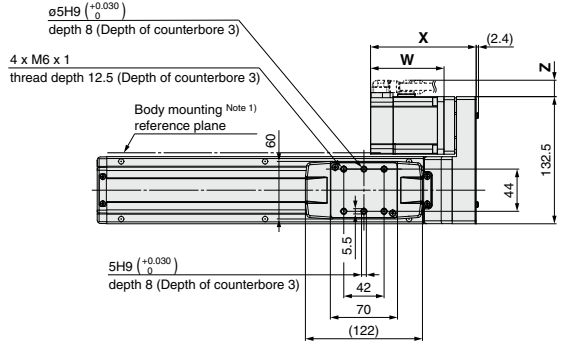


Dimensions

Model	L	A	B	n	D	E
LEFS32□S□-50□	245	56	180	4	—	—
LEFS32□S□-100□	295	106	230	4	—	—
LEFS32□S□-150□	345	156	280	4	—	—
LEFS32□S□-200□	395	206	330	6	2	300
LEFS32□S□-250□	445	256	380	6	2	300
LEFS32□S□-300□	495	306	430	6	2	300
LEFS32□S□-350□	545	356	480	8	3	450
LEFS32□S□-400□	595	406	530	8	3	450
LEFS32□S□-450□	645	456	580	8	3	450
LEFS32□S□-500□	695	506	630	10	4	600
LEFS32□S□-550□	745	556	680	10	4	600
LEFS32□S□-600□	795	606	730	10	4	600
LEFS32□S□-650□	845	656	780	12	5	750
LEFS32□S□-700□	895	706	830	12	5	750
LEFS32□S□-750□	945	756	880	12	5	750
LEFS32□S□-800□	995	806	930	14	6	900
LEFS32□S□-850□	1045	856	980	14	6	900
LEFS32□S□-900□	1095	906	1030	14	6	900
LEFS32□S□-950□	1145	956	1080	16	7	1050
LEFS32□S□-1000□	1195	1006	1130	16	7	1050

Dimensions: Motor Parallel

LEFS40R

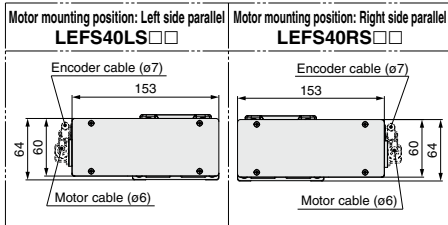

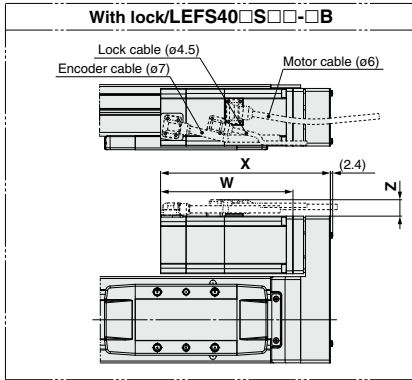


Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more.
(Recommended height 5 mm)

Note 2) The Z-phase first detecting position from the stroke end of the motor side. Please consult with SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

Motor Dimensions

Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
S4	149.2	177.8	110.2	138.8	17.1	17.1
S8	137.5	177	98.5	138	17.1	17.1

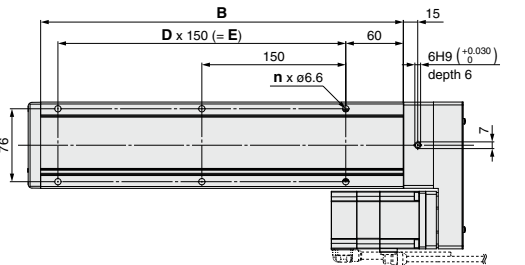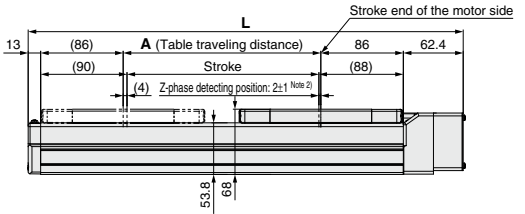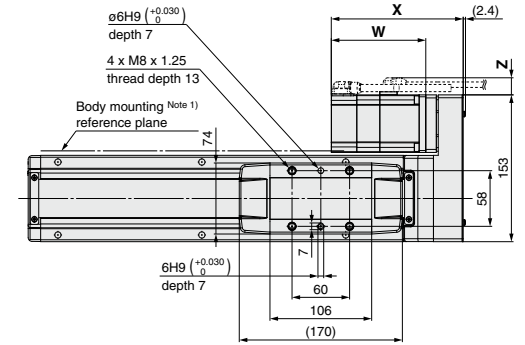

Dimensions

Model	L	A	B	n	D	E
LEFS40□S□-150□	403.4	156	328	4	—	150
LEFS40□S□-200□	453.4	206	378	6	2	300
LEFS40□S□-250□	503.4	256	428	6	2	300
LEFS40□S□-300□	553.4	306	478	6	2	300
LEFS40□S□-350□	603.4	356	528	8	3	450
LEFS40□S□-400□	653.4	406	578	8	3	450
LEFS40□S□-450□	703.4	456	628	8	3	450
LEFS40□S□-500□	753.4	506	678	10	4	600
LEFS40□S□-550□	803.4	556	728	10	4	600
LEFS40□S□-600□	853.4	606	778	10	4	600
LEFS40□S□-650□	903.4	656	828	12	5	750
LEFS40□S□-700□	953.4	706	878	12	5	750
LEFS40□S□-750□	1003.4	756	928	12	5	750
LEFS40□S□-800□	1053.4	806	978	14	6	900
LEFS40□S□-850□	1103.4	856	1028	14	6	900
LEFS40□S□-900□	1153.4	906	1078	14	6	900
LEFS40□S□-950□	1203.4	956	1128	16	7	1050
LEFS40□S□-1000□	1253.4	1006	1178	16	7	1050
LEFS40□S□-1100□	1353.4	1106	1278	18	8	1200
LEFS40□S□-1200□	1453.4	1206	1378	18	8	1200

Support Guide/Ball Screw Drive

LEFG Series LEFG16, 25, 32, 40


RoHS

Clean Room Specification ▶ Page 527

A support guide is designed to support workpieces with significant overhang.

- As the dimensions are the same as the LEF series body, installation is simple and contributes to a reduction in installation and assembly labor.
- The standard equipped seal bands prevent grease from splashing and external foreign matter from entering.

Application example



How to Order

LEFG **32** - **S** - **200**

Support guide

① Size

16
25
32
40

② Type of mounting pitch

Symbol	LEFG16	LEFG25	LEFG32	LEFG40	Note
S	●	●	●	●	Ball screw drive Step motor/Servo motor (24 VDC)/ AC servo motor

③ Stroke [mm]

50	50
to	to
1200	1200

Applicable Stroke Table

Ball Screw Drive/S

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

AC Servo Motor

Model \ Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
LEFG16-S	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—
LEFG25-S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LEFG32-S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LEFG40-S	—	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Weight

Ball Screw Drive/S

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

AC Servo Motor


Model \ Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
LEFG16-S	0.25	0.31	0.37	0.43	0.49	0.55	0.61	0.67	0.73	0.79	—	—	—	—	—	—	—	—	—	—	—	—
LEFG25-S	0.56	0.67	0.78	0.89	1.00	1.11	1.22	1.33	1.44	1.55	1.66	1.77	1.88	1.99	2.10	2.21	—	—	—	—	—	—
LEFG32-S	0.92	1.08	1.23	1.4	1.56	1.72	1.88	2.04	2.20	2.36	2.52	2.68	2.84	3.00	3.16	3.32	3.48	3.64	3.80	3.96	—	—
LEFG40-S	—	—	2.07	2.29	2.51	2.72	2.94	3.15	3.37	3.58	3.80	4.01	4.23	4.44	4.66	4.87	5.09	5.30	5.52	5.73	6.16	6.59

LEFG Series

Step Motor (Servo/24 VDC) Servo Motor (24 VDC) AC Servo Motor

Dimensions: Ball Screw Drive

LEFG32-S

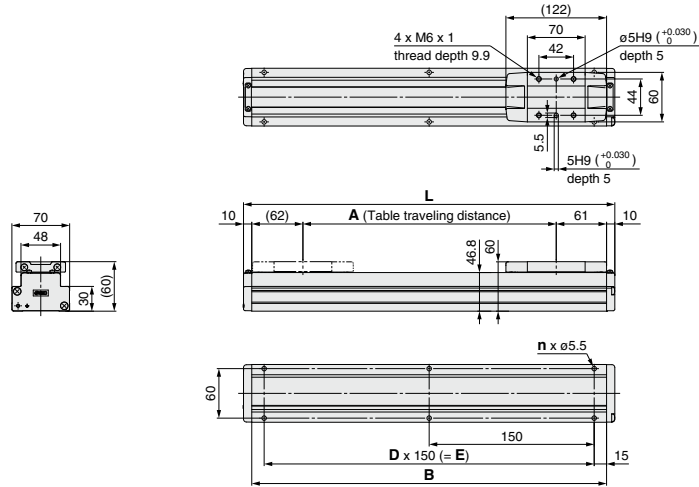

Dimensions


Model	L	A	B	n	D	E
LEFG32-S-50	200	57	180	4	—	—
LEFG32-S-100	250	107	230			
LEFG32-S-150	300	157	280			
LEFG32-S-200	350	207	330	6	2	300
LEFG32-S-250	400	257	380			
LEFG32-S-300	450	307	430			
LEFG32-S-350	500	357	480	8	3	450
LEFG32-S-400	550	407	530			
LEFG32-S-450	600	457	580			
LEFG32-S-500	650	507	630	10	4	600
LEFG32-S-550	700	557	680			
LEFG32-S-600	750	607	730			

Dimensions

Model	L	A	B	n	D	E
LEFG32-S-650	800	657	780	12	5	750
LEFG32-S-700	850	707	830			
LEFG32-S-750	900	757	880			
LEFG32-S-800	950	807	930	14	6	900
LEFG32-S-850	1000	857	980			
LEFG32-S-900	1050	907	1030			
LEFG32-S-950	1100	957	1080	16	7	1050
LEFG32-S-1000	1150	1007	1130			


* When a support guide is used for the LEFG32□□□□ (Motor parallel type), order a table spacer separately since the table height differs.
Table spacer part number: LEF-TS32

Table spacer LEF-TS32

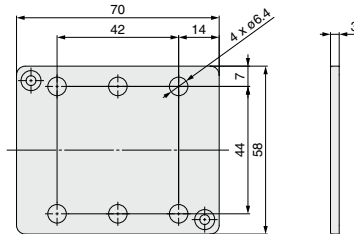

Dimensions: Ball Screw Drive

LEFG40-S

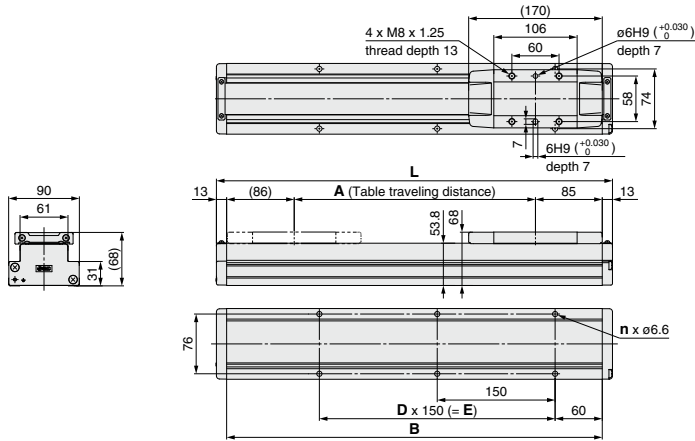

Dimensions

Model	L	A	B	n	D	E
LEFG40-S-150	354	157	328	4	—	150
LEFG40-S-200	404	207	378	6	2	300
LEFG40-S-250	454	257	428			
LEFG40-S-300	504	307	478			
LEFG40-S-350	554	357	528			
LEFG40-S-400	604	407	578	8	3	450
LEFG40-S-450	654	457	628			
LEFG40-S-500	704	507	678			
LEFG40-S-550	754	557	728	10	4	600
LEFG40-S-600	804	607	778			

Dimensions

Model	L	A	B	n	D	E
LEFG40-S-650	854	657	828	12	5	750
LEFG40-S-700	904	707	878			
LEFG40-S-750	954	757	928			
LEFG40-S-800	1004	807	978	14	6	900
LEFG40-S-850	1054	857	1028			
LEFG40-S-900	1104	907	1078			
LEFG40-S-950	1154	957	1128	16	7	1050
LEFG40-S-1000	1204	1007	1178			
LEFG40-S-1100	1304	1107	1278	18	8	1200
LEFG40-S-1200	1404	1207	1378			

Electric Actuator/Slider Type Belt Drive

LEFB Series LEFB16, 25, 32



The belt drive actuator cannot be used vertically for applications.

How to Order

LEFB **16** **T** - **500** - **R16N1**

1 2 3 4 5 6 7 8 9 10

1 Size

16
25
32

2 Motor type

Symbol	Type	Applicable size			Compatible controller/driver
		LEFB16	LEFB25	LEFB32	
NII	Step motor (Servo/24 VDC)	●	●	●	LECP6 LECP1 LECPA LECPMJ
A	Servo motor (24 VDC)	●	●	—	LECA6

3 Equivalent lead [mm]

T	48
---	----

4 Stroke [mm]

300	300
to	to
2000	2000

* Refer to the applicable stroke table.

Caution

[CE-compliant products]

① EMC compliance was tested by combining the electric actuator LEF series and the controller LEC series.

The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, conformity to the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify conformity to the EMC directive for the machinery and equipment as a whole.

② For the servo motor (24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to page 568 for the noise filter set. Refer to the LECA series Operation Manual for installation.

③ CC-Link direct input type (LECPMJ) is not CE-compliant.

[UL-compliant products]

When conformity to UL is required, the electric actuator and controller/driver should be used with a UL1310 Class 2 power supply.

Applicable Stroke Table

Model	Stroke	300	500	600	700	800	900	1000	1200	1500	1800	2000
LEFB16		●	●	●	●	●	●	●	—	—	—	—
LEFB25		●	●	●	●	●	●	●	●	●	●	●
LEFB32		●	●	●	●	●	●	●	●	●	●	●

* Please consult with SMC for non-standard strokes as they are produced as special orders.

Support Guide/LEFG Series

A support guide is designed to support workpieces with significant overhang.

Page 108




The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and the actuator is correct.

<Check the following before use.>


- ① Check the actuator label for model number. This matches the controller/driver.
- ② Check Parallel I/O configuration matches (NPN or PNP).

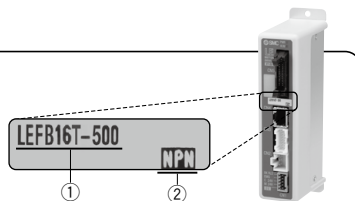

* Refer to the Operation Manual for using the products. Please download it via our website, <http://www.smcworld.com>

Electric Actuator/Slider Type Belt Drive **LEFB Series**

Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

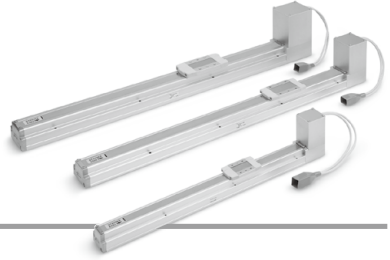

5 Motor option

NII	Without option
B	With lock

8 Controller/Driver type^{*1}

NII	Without controller/driver	
6N	LECP6/LECA6	NPN
6P	(Step data input type)	PNP
1N	LECP1^{*2}	NPN
1P	(Programless type)	PNP
MJ	LECPMJ^{*2, *3}	—
	(CC-Link direct input type)	
AN	LECPA^{*2, *4}	NPN
AP	(Pulse input type)	PNP

^{*1} For details about controller/driver and compatible motor, refer to the compatible controller/driver below.

^{*2} Only available for the motor type "Step motor."

^{*3} Not applicable to CE.

^{*4} When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) on page 596 separately.

6 Actuator cable type^{*1}

NII	Without cable
S	Standard cable ^{*2}
R	Robotic cable (Flexible cable) ^{*3}

^{*1} The standard cable should be used on fixed parts. For using on moving parts, select the robotic cable.

^{*2} Only available for the motor type "Step motor."

^{*3} Fix the motor cable protruding from the actuator to keep it unmovable. For details about fixing method, refer to Wiring/Cables in the Electric Actuators Precautions.

9 I/O cable length^{*1}, Communication plug

NII	Without cable (Without communication plug connector) ^{*3}
1	1.5 m
3	3 m ^{*2}
5	5 m ^{*2}
S	Straight type communication plug connector ^{*3}
T	T-branch type communication plug connector ^{*3}

^{*1} When "Without controller/driver" is selected for controller/driver types, I/O cable cannot be selected. Refer to page 568 (For LECP6/LECA6), page 582 (For LECP1) or page 596 (For LECPA) if I/O cable is required.

^{*2} When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector.

^{*3} For the LECPMJ, only "NII", "S" and "T" are selectable since I/O cable is not included.

7 Actuator cable length [m]

NII	Without cable
1	1.5
3	3
5	5
8	8*
A	10*
B	15*
C	20*

* Produced upon receipt of order (Robotic cable only). Refer to the specifications Note 2) on pages 92 and 93.

10 Controller/Driver mounting

NII	Screw mounting
D	DIN rail mounting*

* DIN rail is not included. Order it separately.

Compatible Controller/Driver

Type	Step data input type	Step data input type	CC-Link direct input type	Programless type	Pulse input type
					
Series	LECP6	LECA6	LECPMJ	LECP1	LECPA
Features	Value (Step data) input Standard controller		CC-Link direct input	Capable of setting up operation (step data) without using a PC or teaching box	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)	Step motor (Servo/24 VDC)		
Maximum number of step data	64 points			14 points	—
Power supply voltage	24 VDC				
Reference page	Page 560	Page 560	Page 600	Page 576	Page 590

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

X-5

11-

LEFS

11-

LEJS

25A-

LEC□

LEC

□

LEC

SS-T

LEC

Y□

Motor-

less

LAT

LZ□

LC3F2

Specifications

Step Motor (Servo/24 VDC)

Model			LEFB16	LEFB25	LEFB32
Actuator specifications	Stroke [mm] ^{Note 1)}		300, 500, 600, 700 800, 900, 1000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000
	Work load [kg] ^{Note 2)}	Horizontal	LECP6/LECP1/LECPMJ	1	10
			LECPA	1	5
	Speed [mm/s] ^{Note 2)}		48 to 1100	48 to 1400	48 to 1500
	Max. acceleration/deceleration [mm/s ²]		3000		
	Positioning repeatability [mm]		±0.08		
	Lost motion [mm] ^{Note 3)}		0.1 or less		
	Equivalent lead [mm]		48	48	48
	Impact/Vibration resistance [m/s ²] ^{Note 4)}		50/20		
	Actuation type		Belt		
Guide type		Linear guide			
Operating temperature range [°C]		5 to 40			
Operating humidity range [%RH]		90 or less (No condensation)			
Electric specifications	Motor size		□28	□42	□56.4
	Motor type		Step motor (Servo/24 VDC)		
	Encoder		Incremental A/B phase (800 pulse/rotation)		
	Rated voltage [V]		24 VDC ±10%		
	Power consumption [W] ^{Note 5)}		24	32	52
	Standby power consumption when operating [W] ^{Note 6)}		18	16	44
	Max. instantaneous power consumption [W] ^{Note 7)}		51	60	127
	Type ^{Note 8)}		Non-magnetizing lock		
	Holding force [N]		4	19	36
Lock unit specifications	Power consumption [W] ^{Note 9)}		2.9	5	5
	Rated voltage [V]		24 VDC ±10%		

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) Speed changes according to the controller/driver type and work load. Check "Speed-Work Load Graph (Guide)" on page 41.

Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m. Cannot be used vertically for applications.

Note 3) A reference value for correcting an error in reciprocal operation.

Note 4) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 5) The power consumption (including the controller) is for when the actuator is operating.

Note 6) The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation.

Note 7) The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.

Note 8) With lock only

Note 9) For an actuator with lock, add the power consumption for the lock.

Specifications

Servo Motor (24 VDC)

Model		LEFB16A	LEFB25A
Actuator specifications	Stroke [mm] ^{Note 1)}	300, 500, 600, 700 800, 900, 1000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000
	Work load [kg] ^{Note 2)} / Horizontal	1	2
	Speed [mm/s] ^{Note 2)}	5 to 2000	5 to 2000
	Max. acceleration/deceleration [mm/s ²]	3000	
	Positioning repeatability [mm]	±0.08	
	Lost motion [mm] ^{Note 3)}	0.1 or less	
	Equivalent lead [mm]	48	48
	Impact/Vibration resistance [m/s ²] ^{Note 4)}	50/20	
	Actuation type	Belt	
	Guide type	Linear guide	
Electric specifications	Operating temperature range [°C]	5 to 40	
	Operating humidity range [%RH]	90 or less (No condensation)	
	Motor size	□28	□42
	Motor output [W]	30	36
	Motor type	Servo motor (24 VDC)	
	Encoder	Incremental A/B (800 pulse/rotation)/Z phase	
	Rated voltage [V]	24 VDC ±10%	
	Power consumption [W] ^{Note 5)}	78	69
	Standby power consumption when operating [W] ^{Note 6)}	Horizontal 4	Horizontal 5
	Max. instantaneous power consumption [W] ^{Note 7)}	87	120
Lock unit specifications	Type ^{Note 8)}	Non-magnetizing lock	
	Holding force [N]	4	19
	Power consumption [W] ^{Note 9)}	2.9	5
	Rated voltage [V]	24 VDC ±10%	

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) Check "Speed-Work Load Graph (Guide)" on page 42 for details. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m.

Note 3) A reference value for correcting an error in reciprocal operation.

Note 4) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 5) The power consumption (including the controller) is for when the actuator is operating.

Note 6) The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation.

Note 7) The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.

Note 8) With lock only

Note 9) For an actuator with lock, add the power consumption for the lock.

Weight

Series	LEFB16					
Stroke [mm]	300	500	600	700	800	900
Product weight [kg]	1.19	1.45	1.58	1.71	1.84	1.97
Additional weight with lock [kg]	0.12					

Series	LEFB25										
Stroke [mm]	300	500	600	700	800	900	1000	1200	1500	1800	2000
Product weight [kg]	2.39	2.85	3.08	3.31	3.54	3.77	4.00	4.46	5.15	5.84	6.30
Additional weight with lock [kg]	0.26										

Series	LEFB32										
Stroke [mm]	300	500	600	700	800	900	1000	1200	1500	1800	2000
Product weight [kg]	4.12	4.80	5.14	5.48	5.82	6.16	6.50	7.18	8.20	9.22	9.90
Additional weight with lock [kg]	0.53										




Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

LEFB Series



No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Rail guide	—	
3	Belt	—	
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminum alloy	Anodized
6	Table	Aluminum alloy	Anodized
7	Blanking plate	Aluminum alloy	Anodized
8	Seal band holder	Synthetic resin	
9	Housing A	Aluminum die-cast	Coating
10	Pulley holder	Aluminum alloy	
11	Pulley shaft	Stainless steel	
12	End pulley	Aluminum alloy	Anodized
13	Motor pulley	Aluminum alloy	Anodized
14	Motor mount	Aluminum alloy	Anodized
15	Motor cover	Aluminum alloy	Anodized
16	End cover	Aluminum alloy	Anodized
17	Band stopper	Stainless steel	
18	Motor	—	
19	Rubber bushing	NBR	
20	Stopper	Aluminum alloy	
21	Dust seal band	Stainless steel	
22	Bearing	—	
23	Bearing	—	
24	Tension adjustment cap screw	Chromium molybdenum steel	Chromating
25	Pulley retaining screw	Chromium molybdenum steel	Chromating




LEFB16



Note 4) [] for when the direction of return to origin has changed.

Model	L	A	B	n	D	E	[mm]
LEFB16□T-300□	495.5	306	435	6	2	300	
LEFB16□T-500□	695.5	506	635	10	4	600	
LEFB16□T-600□	795.5	606	735	10	4	600	
LEFB16□T-700□	895.5	706	835	12	5	750	
LEFB16□T-800□	995.5	806	935	14	6	900	
LEFB16□T-900□	1095.5	906	1035	14	6	900	
LEFB16□T-1000□	1195.5	1006	1135	16	7	1050	

LEFB25



Model	H [mm]
LEFB25T- <u>ST</u>	115.8
LEFB25T- <u>STB</u>	158.8
LEFB25AT- <u>ST</u>	98.8
LEFB25AT- <u>STB</u>	139.8

Model	L	A	B	n	D	E
LEFB25□T-300□	541.8	306	467	6	2	340
LEFB25□T-500□	741.8	506	667	8	3	510
LEFB25□T-600□	841.8	606	767	10	4	680
LEFB25□T-700□	941.8	706	867	10	4	680
LEFB25□T-800□	1041.8	806	967	12	5	850
LEFB25□T-900□	1141.8	906	1067	14	6	1020
LEFB25□T-1000□	1241.8	1006	1167	14	6	1020
LEFB25□T-1200□	1441.8	1206	1367	16	7	1190
LEFB25□T-1500□	1741.8	1506	1667	20	9	1530
LEFB25□T-1800□	2041.8	1806	1967	24	11	1870
LEFB25□T-2000□	2241.8	2006	2167	26	12	2040


Note 4) [] for when the direction of return to origin has changed.

LEFB Series

Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

Dimensions: Belt Drive

LEFB32

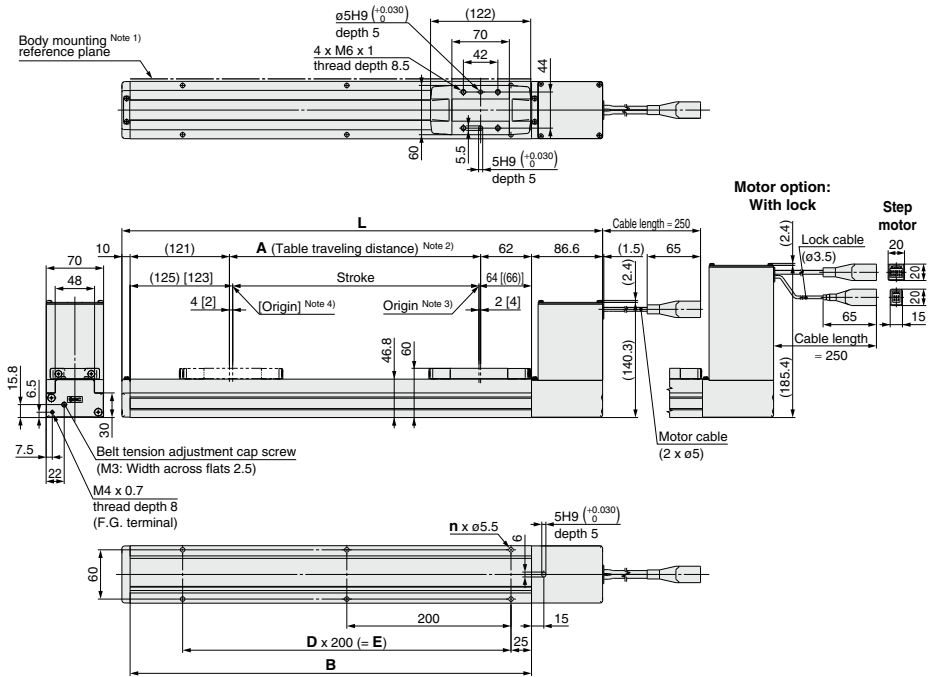

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) Position after return to origin

Note 4) [] for when the direction of return to origin has changed.

Model	L	A	B	n	D	E
LEFB32□T-300□	585.6	306	489	6	2	400
LEFB32□T-500□	785.6	506	689	8	3	600
LEFB32□T-600□	885.6	606	789	8	3	600
LEFB32□T-700□	985.6	706	889	10	4	800
LEFB32□T-800□	1085.6	806	989	10	4	800
LEFB32□T-900□	1185.6	906	1089	12	5	1000
LEFB32□T-1000□	1285.6	1006	1189	12	5	1000
LEFB32□T-1200□	1485.6	1206	1389	14	6	1200
LEFB32□T-1500□	1785.6	1506	1689	18	8	1600
LEFB32□T-1800□	2085.6	1806	1989	20	9	1800
LEFB32□T-2000□	2285.6	2006	2189	22	10	2000

Electric Actuator/Slider Type Belt Drive

LEFB Series LEFB25, 32, 40



RoHS

Motorless Type ▶ Page 810

SSCNET III/IIH Compatible ▶ Page 633

MECHATROLINK Compatible ▶ Page 688

How to Order

LEFB 40 S4 S - 300 - S 2 A1

1 2 3 4 5 6 7 8 9 10

1 Size

25
32
40

2 Motor mounting position

NII	Top mounting
U	Bottom mounting

3 Motor type

Symbol	Type	Output [W]	Actuator size	Compatible driver
S2*	AC servo motor (Incremental encoder)	100	25	LECSA□-S1
S3		200	32	LECSA□-S3
S4		400	40	LECSA2-S4
S6*	AC servo motor (Absolute encoder)	100	25	LECSB□-S5
				LECS□-S5
				LECSS□-S5
S7		200	32	LECSB□-S7
				LECS□-S7
				LECSS□-S7
S8		400	40	LECSB2-S8
				LECSS2-S8

* For motor type S2 and S6, the compatible driver part number suffixes are S1 and S5 respectively.

4 Equivalent lead

S	54 mm
---	-------

6 Motor option

NII	Without option
B	With lock

8 Cable length

NII	Without cable
2	2 m
5	5 m
A	10 m

* The length of the encoder, motor and lock cables are the same.

5 Stroke

300	300 mm
to	to
3000	3000 mm

* Refer to the applicable stroke table.

7 Cable type Note 1) Note 2)

NII	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

Note 1) The motor and encoder cables are included. (The lock cable is also included when the motor with lock option is selected.)

Note 2) Standard cable entry direction is "(A) Axis side". (Refer to page 623 for details.)

9 Driver type

	Compatible driver	Power supply voltage	Size
			25 32 40
NII	Without driver	—	● ● ●
A1	LECSA1-S□	100 to 120	● ● —
A2	LECSA2-S□	200 to 230	● ● ●
B1	LECSB1-S□	100 to 120	● ● —
B2	LECSB2-S□	200 to 230	● ● ●
C1	LECS□1-S□	100 to 120	● ● —
C2	LECS□2-S□	200 to 230	● ● ●
S1	LECSS1-S□	100 to 120	● ● —
S2	LECSS2-S□	200 to 230	● ● ●

10 I/O cable length [m] Note 3)

NII	Without cable
H	Without cable (Connector only)
1	1.5

Note 3) When "Without driver" is selected for driver type, only

"Nil: Without cable" can be selected.

Refer to page 624 if I/O cable is required.

(Options are shown on page 624.)

* When the driver type is selected, the cable is included. Select cable type and cable length.

Example) S2S2: Standard cable (2 m) + Driver (LECSS2)

S2: Standard cable (2 m)

Nil: Without cable and driver

Support Guide/LEFG Series

A support guide is designed to support workpieces with significant overhang.

Page 108



Applicable Stroke Table

	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000
LEFB25	●	●	●	●	●	●	●	●	○	●	○	○	●	○	○	○	○	●	—	—
LEFB32	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	—	—
LEFB40	●	●	●	●	●	●	●	●	○	●	○	○	○	○	○	○	○	○	●	●

●: Standard/○: Produced upon receipt of order

* Please consult with SMC as all non-standard and non-made-to-order strokes are produced as special orders.

Compatible Driver

Driver type	Pulse input type/ Positioning type	Pulse input type	CC-Link direct input type	SSCNET III type
Series	LECSA	LECSB	LECS□	LECSS
Number of point tables	Up to 7	—	Up to 255 (2 stations occupied)	—
Pulse input	○	○	—	—
Applicable network	—	—	CC-Link	SSCNET III
Control encoder	Incremental 17-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder
Communication function	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication
Power supply voltage [V]	100 to 120 VAC (50/60 Hz), 200 to 230 VAC (50/60 Hz)			
Reference page	Page 607			

Specifications

AC Servo Motor

Model			LEFB25S ² ₆	LEFB32S ³ ₇	LEFB40S ⁴ ₈
Actuator specifications	Stroke [mm] ^{Note 1)}		300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000 2500	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000 2500, 3000
	Work load [kg] ^{Note 2)}	Horizontal	5	15	25
	Max. speed [mm/s]		2000	2000	2000
	Max. acceleration/deceleration [mm/s ²]		20000 (Refer to page 55 for limit according to work load and duty ratio.) ^{Note 3)}		
	Positioning repeatability [mm]		±0.06		
	Lost motion [mm] ^{Note 4)}		0.1 or less		
	Equivalent lead [mm]		54		
	Impact/Vibration resistance [m/s ²] ^{Note 5)}		50/20		
	Actuation type		Belt		
	Guide type		Linear guide		
Electric specifications	Operating temperature range [°C]		5 to 40		
	Operating humidity range [%RH]		90 or less (No condensation)		
	Motor output/Size		100 W□40	200 W□60	400 W□60
	Motor type		AC servo motor (100/200 VAC)		
	Encoder		Motor type S2, S3, S4: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type S6, S7, S8: Absolute 18-bit encoder (Resolution: 262144 p/rev)		
	Power consumption [W] ^{Note 6)}	Horizontal	29	41	72
		Vertical	—	—	—
	Standby power consumption when operating [W] ^{Note 7)}	Horizontal	2	2	2
		Vertical	—	—	—
	Max. instantaneous power consumption [W] ^{Note 8)}		445	725	1275
Lock unit specifications	Type ^{Note 9)}		Non-magnetizing lock		
	Holding force [N]		27	54	110
	Power consumption at 20°C [W] ^{Note 10)}		6.3	7.9	7.9
	Rated voltage [V]		24 ⁰ / _{-10%}		

Note 1) Please consult with SMC as all non-standard and non-made-to-order strokes are produced as special orders.

Note 2) For details, refer to "Speed-Work Load Graph (Guide)" on page 55.

Note 3) Maximum acceleration/deceleration changes according to the work load. Check "Work Load-Acceleration/Deceleration Graph" of the catalog.

Note 4) A reference value for correcting an error in reciprocal operation.

Note 5) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 6) The power consumption (including the driver) is for when the actuator is operating.

Note 7) The standby power consumption when operating (including the driver) is for when the actuator is stopped in the set position during the operation.

Note 8) The maximum instantaneous power consumption (including the driver) is for when the actuator is operating.

Note 9) Only when motor option "With lock" is selected.

Note 10) For an actuator with lock, add the power consumption for the lock.

Weight

Series		LEFB25S□																	
Stroke [mm]		300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Motor type		S2	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00
		S6	3.06	3.31	3.56	3.81	4.06	4.31	4.56	4.81	5.06	5.31	5.56	5.81	6.06	6.31	6.56	6.81	7.06
Additional weight with lock [kg]		S2: 0.2/S6: 0.3																	

Series		LEFB32S□																	
Stroke [mm]		300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Motor type		S3	4.90	5.25	5.60	5.95	6.30	6.65	7.00	7.35	7.70	8.05	8.40	8.75	9.10	9.45	9.80	10.15	10.50
		S7	4.84	5.19	5.54	5.81	6.24	6.59	6.94	7.29	7.64	7.99	8.34	8.69	9.04	9.39	9.74	10.09	10.44
Additional weight with lock [kg]		S3: 0.4/S7: 0.7																	

Series		LEFB40S□																	
Stroke [mm]		300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Motor type		S4	7.12	7.57	8.02	8.47	8.92	9.37	9.82	10.27	10.72	11.17	11.62	12.07	12.52	12.97	13.42	13.87	14.32
		S8	7.22	7.67	8.12	8.57	9.02	9.47	9.92	10.37	10.82	11.27	11.72	12.17	12.62	13.07	13.52	13.97	14.42
Additional weight with lock [kg]		S4: 0.7/S8: 0.7																	

LEF

LEJ

LEL

LEM

LEY

LES

LEPY
LEPS

LER

LEH

LEY
-X5

11-
LEFS

11-
LEJS

25A-

LEC□

LEC
S□

LEC
SS-T

LEC
Y□

Motor-
less

LAT

LZ□


LC3F2

LEFB Series

AC Servo Motor

Construction

LEFB25S□S

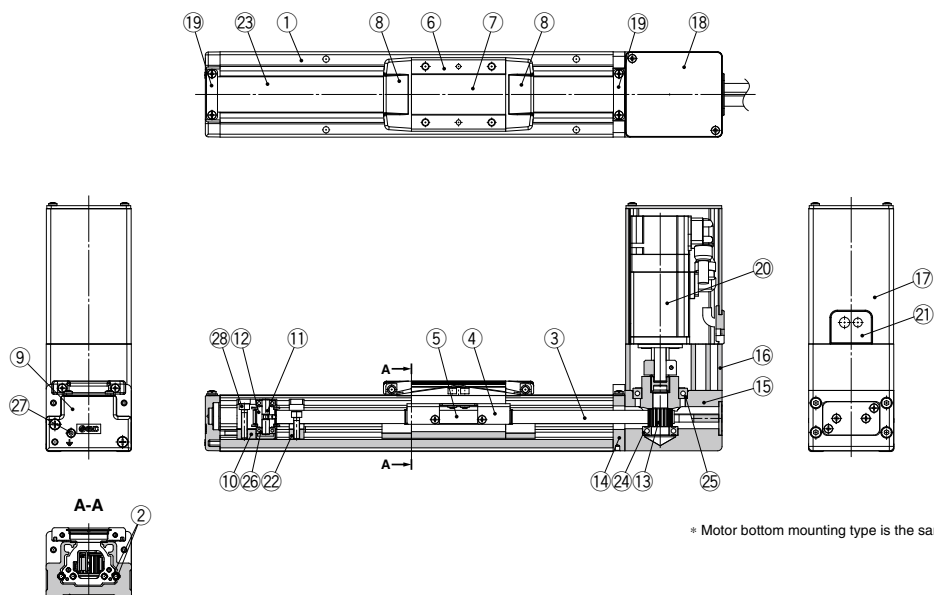

Component Parts


No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Rail guide		
3	Belt		
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminum alloy	Anodized
6	Table	Aluminum alloy	Anodized
7	Blanking plate	Aluminum alloy	Anodized
8	Seal band holder	Synthetic resin	
9	Housing A	Aluminum die-cast	Coating
10	Pulley holder	Aluminum alloy	
11	Pulley shaft	Stainless steel	
12	End pulley	Aluminum alloy	Anodized
13	Motor pulley	Aluminum alloy	Anodized
14	Return flange	Aluminum alloy	Coating

Component Parts

No.	Description	Material	Note
15	Housing	Aluminum alloy	Coating
16	Motor mount	Aluminum alloy	Coating
17	Motor cover	Aluminum alloy	Anodized
18	Motor end cover	Aluminum alloy	Anodized
19	Band stopper	Stainless steel	
20	Motor		
21	Rubber bushing	NBR	
22	Stopper	Aluminum alloy	
23	Dust seal band	Stainless steel	
24	Bearing		
25	Bearing		
26	Spacer	Aluminum alloy	
27	Tension adjustment cap screw	Chromium molybdenum steel	Chromating
28	Pulley retaining screw	Chromium molybdenum steel	Chromating

Construction

LEFB32/40S□S

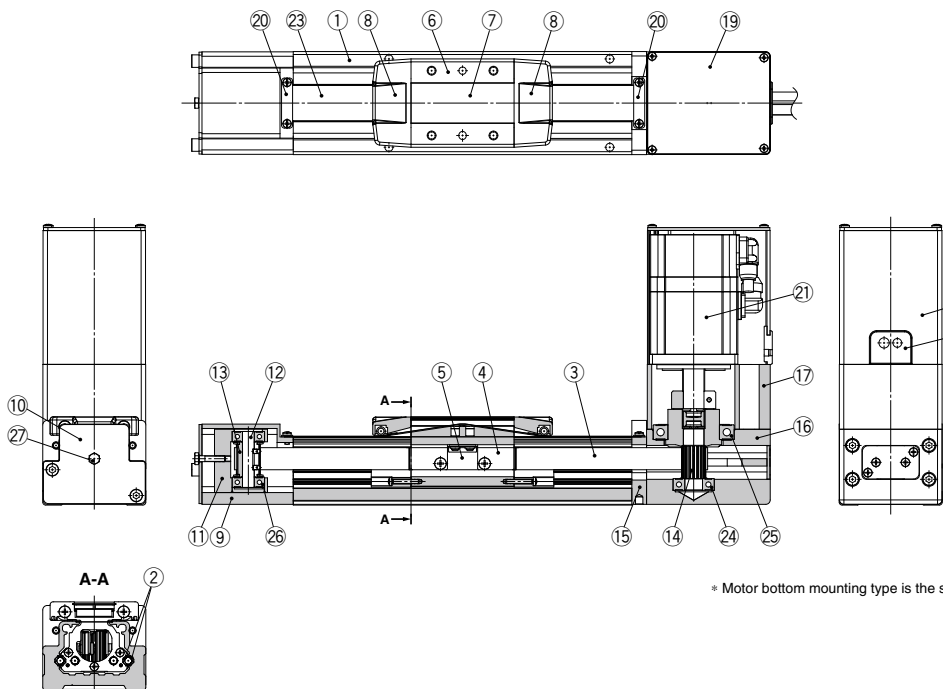

* Motor bottom mounting type is the same.

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Rail guide		
3	Belt		
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminum alloy	Anodized
6	Table	Aluminum alloy	Anodized
7	Blanking plate	Aluminum alloy	Anodized
8	Seal band holder	Synthetic resin	
9	End block	Aluminum alloy	Coating
10	End block cover		
11	Pulley holder	Aluminum alloy	
12	Pulley shaft	Stainless steel	
13	End pulley	Aluminum alloy	Anodized
14	Motor pulley	Aluminum alloy	Anodized

Component Parts

No.	Description	Material	Note
15	Return flange	Aluminum alloy	Coating
16	Housing	Aluminum alloy	Coating
17	Motor mount	Aluminum alloy	Coating
18	Motor cover	Aluminum alloy	Anodized
19	Motor end cover	Aluminum alloy	Anodized
20	Band stopper	Stainless steel	
21	Motor		
22	Rubber bushing	NBR	
23	Dust seal band	Stainless steel	
24	Bearing		
25	Bearing		
26	Bearing		
27	Tension adjustment bolt	Chromium molybdenum steel	Chromating

LEF

LEJ

LEL

LEM

LEY

LES

LEPY

LEPS

LER

LEH

LEY

-X5

11-

LEFS

11-

LEJS

25A-

LEC

S

LEC

SS-T

LEC

Y

Motor-

less


LAT

LZ


LC3F2

Dimensions: Belt Drive

LEFB25/Motor top mounting type

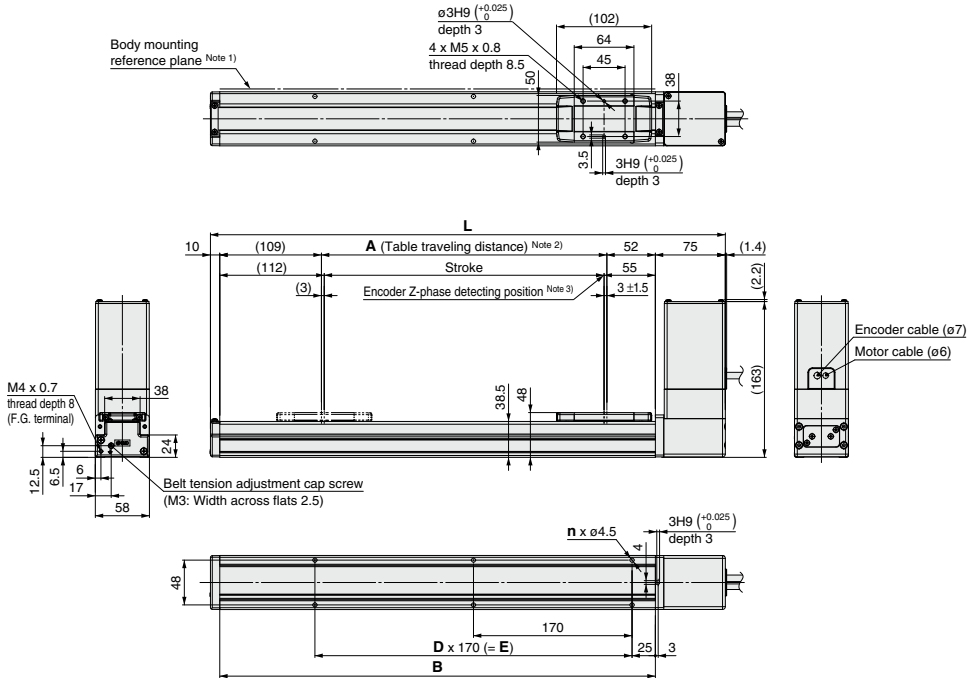

Motor option: With lock

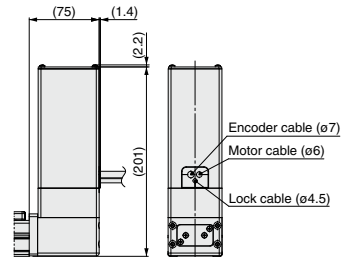

Dimensions

Stroke	L	A	B	n	D	E
300	552	306	467	6	2	340
400	652	406	567	8	3	510
500	752	506	667	8	3	510
600	852	606	767	10	4	680
700	952	706	867	10	4	680
800	1052	806	967	12	5	850
900	1152	906	1067	14	6	1020
1000	1252	1006	1167	14	6	1020
1100	1352	1106	1267	16	7	1190
1200	1452	1206	1367	16	7	1190
1300	1552	1306	1467	18	8	1360
1400	1652	1406	1567	20	9	1530
1500	1752	1506	1667	20	9	1530
1600	1852	1606	1767	22	10	1700
1700	1952	1706	1867	22	10	1700
1800	2052	1806	1967	24	11	1870
1900	2152	1906	2067	24	11	1870
2000	2252	2006	2167	26	12	2040


Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) The Z-phase first detecting position from the stroke end of the motor side

Dimensions: Belt Drive

LEFB32/Motor top mounting type

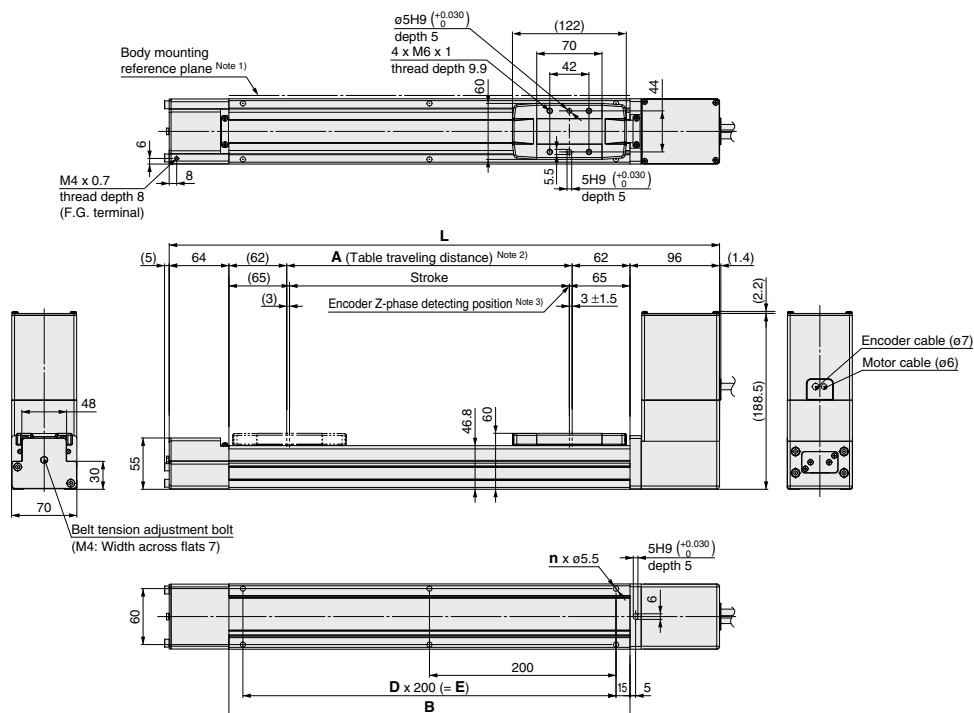


Dimensions

[mm]

Stroke	L	A	B	n	D	E
300	590	306	430	6	2	400
400	690	406	530	6	2	400
500	790	506	630	8	3	600
600	890	606	730	8	3	600
700	990	706	830	10	4	800
800	1090	806	930	10	4	800
900	1190	906	1030	12	5	1000
1000	1290	1006	1130	12	5	1000
1100	1390	1106	1230	14	6	1200
1200	1490	1206	1330	14	6	1200
1300	1590	1306	1430	16	7	1400
1400	1690	1406	1530	16	7	1400
1500	1790	1506	1630	18	8	1600
1600	1890	1606	1730	18	8	1600
1700	1990	1706	1830	20	9	1800
1800	2090	1806	1930	20	9	1800
1900	2190	1906	2030	22	10	2000
2000	2290	2006	2130	22	10	2000
2500	2790	2506	2630	28	13	2600

Motor option: With lock

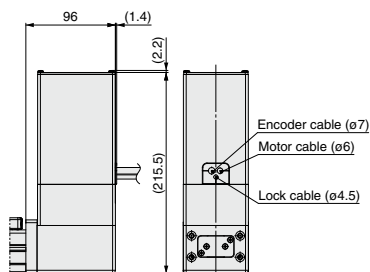


Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) The Z-phase first detecting position from the stroke end of the motor side

LEFB40/Motor top mounting type

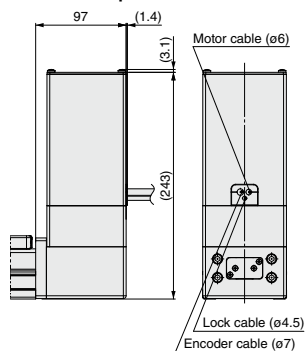


[mm]

Stroke	L	A	B	n	D	E
300	641.5	306	478	6	2	400
400	741.5	406	578	6	2	400
500	841.5	506	678	8	3	600
600	941.5	606	778	8	3	600
700	1041.5	706	878	10	4	800
800	1141.5	806	978	10	4	800
900	1241.5	906	1078	12	5	1000
1000	1341.5	1006	1178	12	5	1000
1100	1441.5	1106	1278	14	6	1200
1200	1541.5	1206	1378	14	6	1200
1300	1641.5	1306	1478	16	7	1400
1400	1741.5	1406	1578	16	7	1400
1500	1841.5	1506	1678	18	8	1600
1600	1941.5	1606	1778	18	8	1600
1700	2041.5	1706	1878	20	9	1800
1800	2141.5	1806	1978	20	9	1800
1900	2241.5	1906	2078	22	10	2000
2000	2341.5	2006	2178	22	10	2000
2500	2841.5	2506	2678	28	13	2600
3000	3341.5	3006	3178	32	15	3000


Note 3) The Z-phase first detecting position from the stroke end of the motor side

Dimensions: Belt Drive

LEFB40U/Motor bottom mounting type

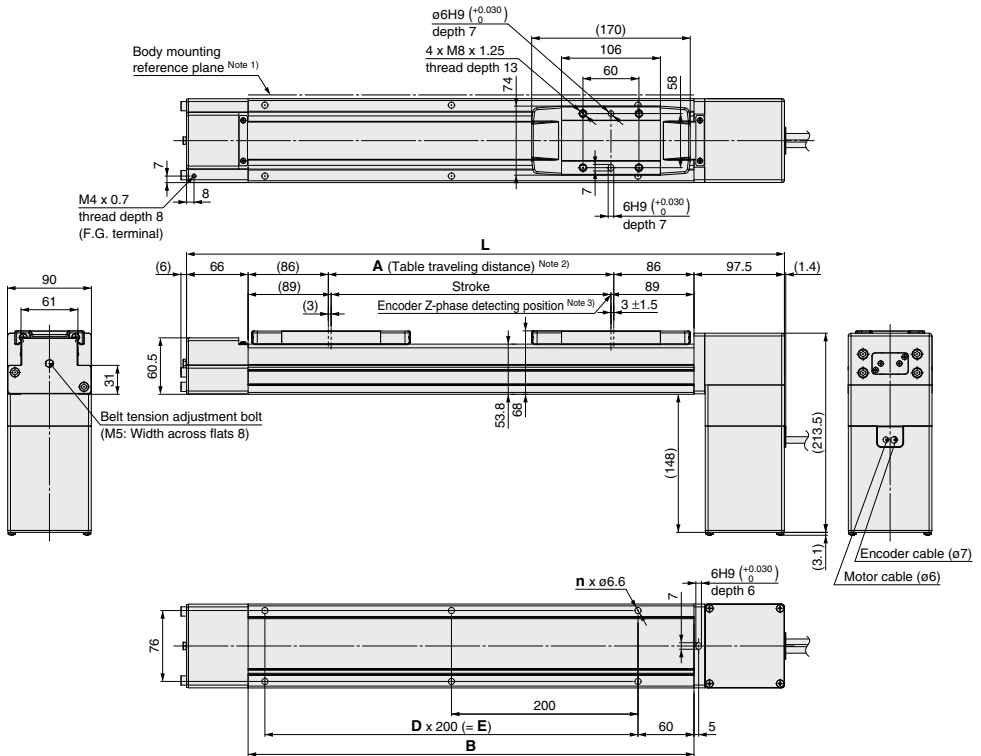

Motor option: With lock



Dimensions

Stroke	L	A	B	n	D	E
300	641.5	306	478	6	2	400
400	741.5	406	578	6	2	400
500	841.5	506	678	8	3	600
600	941.5	606	778	8	3	600
700	1041.5	706	878	10	4	800
800	1141.5	806	978	10	4	800
900	1241.5	906	1078	12	5	1000
1000	1341.5	1006	1178	12	5	1000
1100	1441.5	1106	1278	14	6	1200
1200	1541.5	1206	1378	14	6	1200
1300	1641.5	1306	1478	16	7	1400
1400	1741.5	1406	1578	16	7	1400
1500	1841.5	1506	1678	18	8	1600
1600	1941.5	1606	1778	18	8	1600
1700	2041.5	1706	1878	20	9	1800
1800	2141.5	1806	1978	20	9	1800
1900	2241.5	1906	2078	22	10	2000
2000	2341.5	2006	2178	22	10	2000
2500	2841.5	2506	2678	28	13	2600
3000	3341.5	3006	3178	32	15	3000

Note 1) When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height 5 mm)

Note 2) Distance within which the table can move when it returns to origin. Make sure a workpiece mounted on the table does not interfere with the workpieces and facilities around the table.

Note 3) The Z-phase first detecting position from the stroke end of the motor side

Support Guide/Belt Drive


LEFG Series LEFG16, 25, 32, 40

RoHS

A support guide is designed to support workpieces with significant overhang.

- As the dimensions are the same as the LEF series body, installation is simple and contributes to a reduction in installation and assembly labor.
- The standard equipped seal bands prevent grease from splashing and external foreign matter from entering.

Application example



How to Order

LEFG **32** - **BT** - **300**

Support guide

① Size

16
25
32
40

② Type of mounting pitch

Symbol	LEFG16	LEFG25	LEFG32	LEFG40	Note	
BT	●	●	●	—	Belt drive	Step motor/Servo motor (24 VDC)
BS	—	●	●	●		AC servo motor

③ Stroke [mm]

300	300
to	to
3000	3000

Applicable Stroke Table

Belt Drive/BT

Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

Model	Stroke [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
LEFG16-BT		●	—	—	—	●	—	●	—	●	—	●	—	●	—	●
LEFG25-BT		●	●	—	—	●	—	●	—	●	—	●	—	●	—	●
LEFG32-BT		●	—	—	—	●	—	●	—	●	—	●	—	●	—	●

Model	Stroke [mm]	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
LEFG16-BT		—	—	—	—	—	—	—	—	—	—
LEFG25-BT		—	●	—	—	●	—	—	●	—	●
LEFG32-BT		—	●	—	—	●	—	—	●	—	●

Belt Drive/BS

AC Servo Motor

Model	Stroke [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
LEFG25-BS		●	—	●	—	●	—	●	—	●	—	●	—	●	—	●
LEFG32-BS		●	●	—	—	●	—	●	—	●	—	●	—	●	—	●
LEFG40-BS		●	—	●	—	●	—	●	—	●	—	●	—	●	—	●

Model	Stroke [mm]	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000
LEFG25-BS		●	●	●	●	●	●	●	●	●	●	—	—
LEFG32-BS		●	●	●	●	●	●	●	●	●	●	—	—
LEFG40-BS		●	●	●	●	●	●	●	●	●	●	●	●

Weight

Belt Drive/BT Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

Model	Stroke [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
LEFG16-BT	0.62	—	—	—	—	0.86	—	0.98	—	1.1	—	1.22	—	1.34	—	1.46
LEFG25-BT	1.25	—	—	—	—	1.69	—	1.91	—	2.13	—	2.35	—	2.57	—	2.79
LEFG32-BT	1.92	—	—	—	—	2.56	—	2.88	—	3.20	—	3.52	—	3.84	—	4.16

Model	Stroke [mm]	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
LEFG16-BT	—	—	—	—	—	—	—	—	—	—	—
LEFG25-BT	—	3.23	—	—	—	3.89	—	—	4.55	—	4.99
LEFG32-BT	—	4.80	—	—	—	5.76	—	—	6.72	—	7.36


Belt Drive/BS AC Servo Motor

Model	Stroke [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
LEFG25-BS	1.25	—	—	—	—	1.69	—	1.91	—	2.13	—	2.35	—	2.57	—	2.79
LEFG32-BS	1.72	—	2.04	—	—	2.36	—	2.68	—	3.00	—	3.32	—	3.64	—	3.96
LEFG40-BS	2.72	—	3.15	—	—	3.58	—	4.01	—	4.44	—	4.87	—	5.30	—	5.73

Model	Stroke [mm]	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000
LEFG25-BS	3.01	3.23	3.45	3.67	3.89	4.11	4.33	4.55	4.77	4.99	—	—	—
LEFG32-BS	4.28	4.60	4.92	5.24	5.56	5.88	6.20	6.52	6.84	7.16	8.76	—	—
LEFG40-BS	6.16	6.59	7.02	7.45	7.88	8.31	8.74	9.17	9.60	10.03	12.18	14.33	—

Dimensions: Belt Drive

Step motor/Servo motor (24 VDC): LEFG16-BT

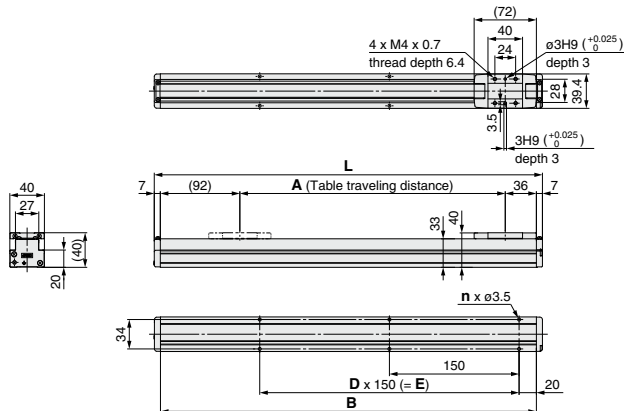

Dimensions [mm]


Model	L	A	B	n	D	E
LEFG16-BT-300	449	307	435	6	2	300
LEFG16-BT-500	649	507	635	10	4	600
LEFG16-BT-600	749	607	735	10	4	600
LEFG16-BT-700	849	707	835	12	5	750
LEFG16-BT-800	949	807	935	14	6	900
LEFG16-BT-900	1049	907	1035	14	6	900
LEFG16-BT-1000	1149	1007	1135	16	7	1050

LEFG Series

Step Motor (Servo/24 VDC) Servo Motor (24 VDC) AC Servo Motor

Dimensions: Belt Drive

Step motor/Servo motor (24 VDC): LEFG25-BT

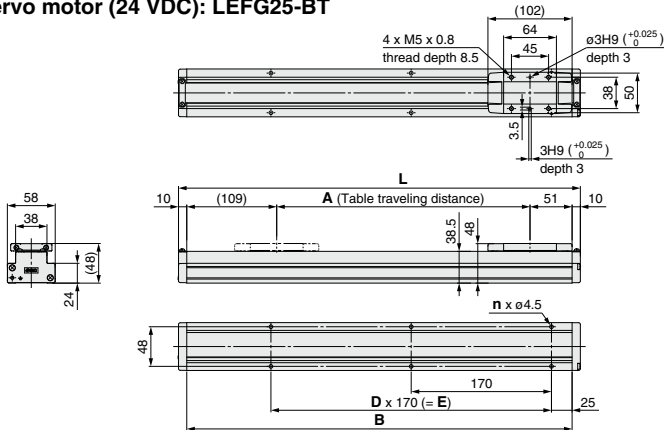


Dimensions

Model	L	A	B	n	D	E
LEFG25-BT-300	487	307	467	6	2	340
LEFG25-BT-500	687	507	667	8	3	510
LEFG25-BT-600	787	607	767	10	4	680
LEFG25-BT-700	887	707	867	12	5	850
LEFG25-BT-800	987	807	967	14	6	1020
LEFG25-BT-900	1087	907	1067	16	7	1190
LEFG25-BT-1000	1187	1007	1167	18	8	1360

Dimensions

Model	L	A	B	n	D	E
LEFG25-BT-1200	1387	1207	1367	20	9	1530
LEFG25-BT-1500	1687	1507	1667	24	11	1870
LEFG25-BT-1800	1987	1807	1967	26	12	2040

AC servo motor: LEFG25-BS

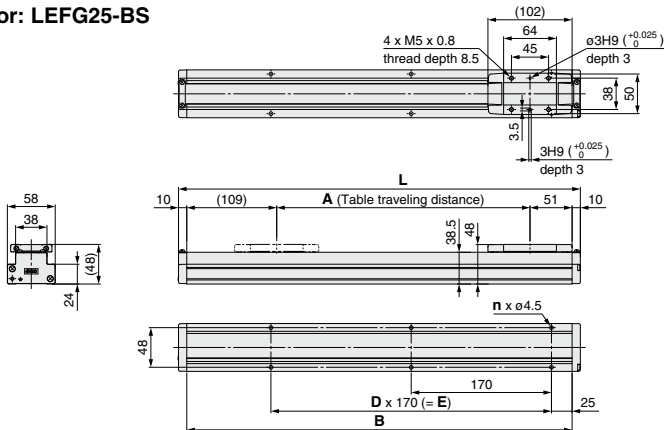

Dimensions


Model	L	A	B	n	D	E
LEFG25-BS-300	487	307	467	6	2	340
LEFG25-BS-400	587	407	567	8	3	510
LEFG25-BS-500	687	507	667	10	4	680
LEFG25-BS-600	787	607	767	12	5	850
LEFG25-BS-700	887	707	867	14	6	1020
LEFG25-BS-800	987	807	967	16	7	1190
LEFG25-BS-900	1087	907	1067	18	8	1360
LEFG25-BS-1000	1187	1007	1167	20	9	1530
LEFG25-BS-1100	1287	1107	1267	22	10	1700
LEFG25-BS-1200	1387	1207	1367	24	11	1870

Dimensions

Model	L	A	B	n	D	E
LEFG25-BS-1300	1487	1307	1467	26	12	2040
LEFG25-BS-1400	1587	1407	1567	28	13	2210
LEFG25-BS-1500	1687	1507	1667	30	14	2380
LEFG25-BS-1600	1787	1607	1767	32	15	2550
LEFG25-BS-1700	1887	1707	1867	34	16	2720
LEFG25-BS-1800	1987	1807	1967	36	17	2890
LEFG25-BS-1900	2087	1907	2067	38	18	3060
LEFG25-BS-2000	2187	2007	2167	40	19	3230

Dimensions: Belt Drive

Step motor/Servo motor (24 VDC): LEFG32-BT

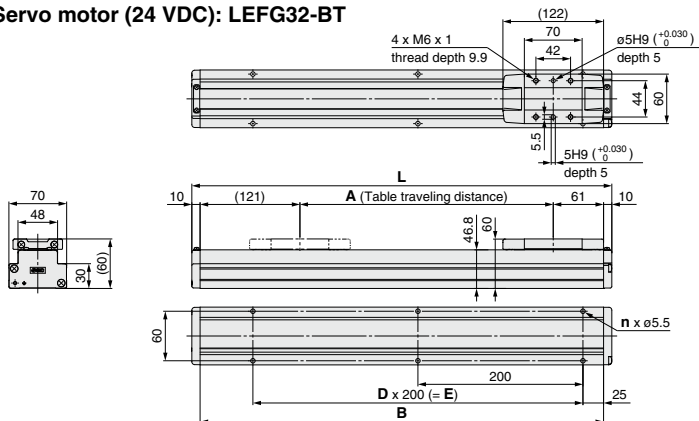


Dimensions

Model	L	A	B	n	D	E
LEFG32-BT-300	509	307	489	6	2	400
LEFG32-BT-500	709	507	689	8	3	600
LEFG32-BT-600	809	607	789	8	3	600
LEFG32-BT-700	909	707	889	10	4	800
LEFG32-BT-800	1009	807	989	10	4	800
LEFG32-BT-900	1109	907	1089	12	5	1000
LEFG32-BT-1000	1209	1007	1189	12	5	1000

Dimensions

Model	L	A	B	n	D	E
LEFG32-BT-1200	1409	1207	1389	14	6	1200
LEFG32-BT-1500	1709	1507	1689	18	8	1600
LEFG32-BT-1800	2009	1807	1989	20	9	1800
LEFG32-BT-2000	2209	2007	2189	22	10	2000

AC servo motor: LEFG32-BS

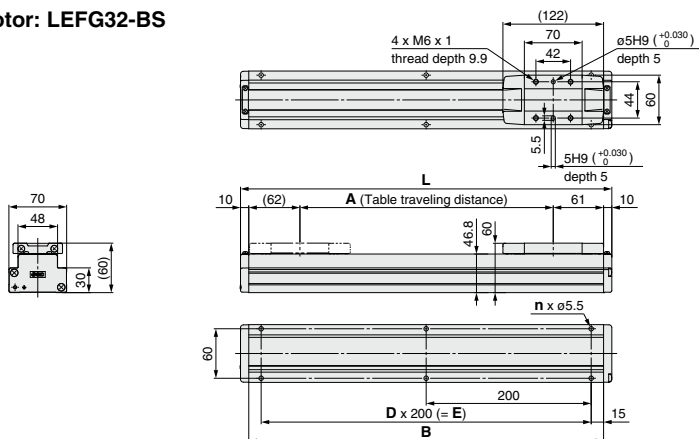

Dimensions

Model	L	A	B	n	D	E
LEFG32-BS-300	450	307	430	6	2	400
LEFG32-BS-400	550	407	530	8	3	600
LEFG32-BS-500	650	507	630	8	3	600
LEFG32-BS-600	750	607	730	10	4	800
LEFG32-BS-700	850	707	830	10	4	800
LEFG32-BS-800	950	807	930	12	5	1000
LEFG32-BS-900	1050	907	1030	12	5	1000
LEFG32-BS-1000	1150	1007	1130	14	6	1200
LEFG32-BS-1100	1250	1107	1230	14	6	1200
LEFG32-BS-1200	1350	1207	1330	14	6	1200

Dimensions


Model	L	A	B	n	D	E
LEFG32-BS-1300	1450	1307	1430	16	7	1400
LEFG32-BS-1400	1550	1407	1530	18	8	1600
LEFG32-BS-1500	1650	1507	1630	18	8	1600
LEFG32-BS-1600	1750	1607	1730	20	9	1800
LEFG32-BS-1700	1850	1707	1830	20	9	1800
LEFG32-BS-1800	1950	1807	1930	22	10	2000
LEFG32-BS-1900	2050	1907	2030	22	10	2000
LEFG32-BS-2000	2150	2007	2130	28	13	2600
LEFG32-BS-2500	2650	2507	2630	28	13	2600

LEFG Series

Step Motor (Servo/24 VDC) Servo Motor (24 VDC) AC Servo Motor

Dimensions: Belt Drive

AC servo motor: LEFG40-BS

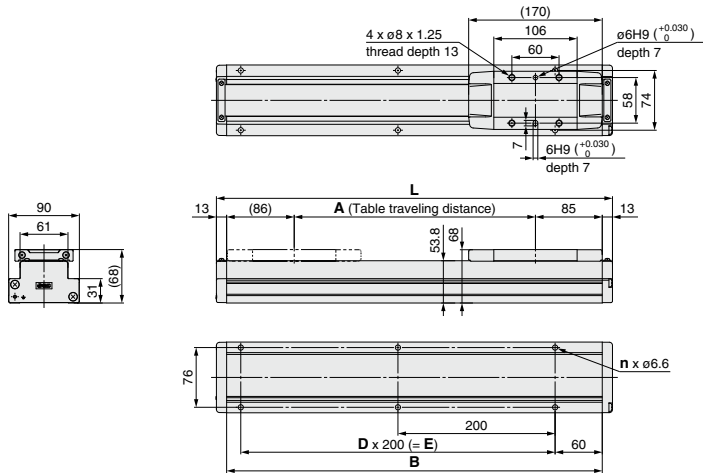

Dimensions

Model	L	A	B	n	D	E
LEFG40-BS-300	504	307	478	6	2	400
LEFG40-BS-400	604	407	578	6	2	400
LEFG40-BS-500	704	507	678	8	3	600
LEFG40-BS-600	804	607	778	8	3	600
LEFG40-BS-700	904	707	878	10	4	800
LEFG40-BS-800	1004	807	978	10	4	800
LEFG40-BS-900	1104	907	1078	12	5	1000
LEFG40-BS-1000	1204	1007	1178	12	5	1000
LEFG40-BS-1100	1304	1107	1278	14	6	1200
LEFG40-BS-1200	1404	1207	1378	14	6	1200

Dimensions

Model	L	A	B	n	D	E
LEFG40-BS-1300	1504	1307	1478	16	7	1400
LEFG40-BS-1400	1604	1407	1578	16	7	1400
LEFG40-BS-1500	1704	1507	1678	18	8	1600
LEFG40-BS-1600	1804	1607	1778	18	8	1600
LEFG40-BS-1700	1904	1707	1878	20	9	1800
LEFG40-BS-1800	2004	1807	1978	20	9	1800
LEFG40-BS-1900	2104	1907	2078	22	10	2000
LEFG40-BS-2000	2204	2007	2178	22	10	2000
LEFG40-BS-2500	2704	2507	2678	28	13	2600
LEFG40-BS-3000	3204	3007	3178	32	15	3000



LEF Series Electric Actuator Specific Product Precautions 1

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 3 to 8 for Electric Actuator Precautions.

Design

⚠ Caution

1. Do not apply a load in excess of the specification limits.

Select a suitable actuator by work load and allowable moment. If the product is used outside of the specification limits, the eccentric load applied to the guide will be excessive and have adverse effects such as creating play on the guide, degrading accuracy and shortening the life of the product.

2. Do not use the product in applications where excessive external force or impact force is applied to it.

This can cause a failure.

Selection

⚠ Warning

1. Do not increase the speed in excess of the specification limits.

Select a suitable actuator by the relationship between the allowable work load and speed, and the allowable speed of each stroke. If the product is used outside of the specification limits, it will have adverse effects such as creating noise, degrading accuracy and shortening the life of the product.

2. Do not use the product in applications where excessive external force or impact force is applied to it.

This can cause a failure.

3. When the product repeatedly cycles with partial strokes (see the table below), operate it at a full stroke at least once every 10 dozens of cycles.

Otherwise, lubrication can run out.

Model	Partial stroke
LEFS25	65 mm or less
LEFS32	70 mm or less
LEFS40	105 mm or less

4. When external force is applied to the table, it is necessary to add external force to the work load as the total carried load for the sizing.

When a cable duct or flexible moving tube is attached to the actuator, the sliding resistance of the table increases and may lead to operational failure of the product.

5. The forward/reverse torque limit is set to 100% (3 times the motor rated torque) as default.

This value is the maximum torque (the limit value) in the "Position control mode", "Speed control mode" or "Positioning mode". When the product is operated with a smaller value than the default, acceleration when driving can decrease. Set the value after confirming the actual device to be used.

Handling

⚠ Caution

1. Set [In position] in the step data to at least 0.5 (at least 1 for the belt type).

Otherwise, completion signal of in position may not be output.

Handling

⚠ Caution

2. INP output signal


1) Positioning operation

When the product comes within the set range by step data [In position], the INP output signal will turn on.
Initial value: Set to [0.50] or higher.

3. Never hit at the stroke end except during return to origin.

When incorrect instructions are inputted, such as using the product outside of the specification limits or operation outside of actual stroke through changes in the controller/driver setting and/or origin position, the table may collide against the stroke end of the actuator. Check these points before use.

If the table collides against the stroke end of the actuator, the guide, belt or internal stopper can be broken. This may lead to abnormal operation.



Handle the actuator with care when it is used in the vertical direction as the workpiece will fall freely from its own weight.

4. The moving force should be the initial value.

If the moving force is set below the initial value, it may cause an alarm.

5. The actual speed of this actuator is affected by the work load and stroke.

Check the model selection section of the catalog.

6. Do not apply a load, impact or resistance in addition to the transferred load during return to origin.

Additional force will cause the displacement of the origin position since it is based on detected motor torque.

7. Do not dent, scratch or cause other damage to the body and table mounting surfaces.

This may cause unevenness in the mounting surface, play in the guide or an increase in the sliding resistance.

8. Do not apply strong impact or an excessive moment while mounting a workpiece.

If an external force over the allowable moment is applied, it may cause play in the guide or an increase in the sliding resistance.

9. Keep the flatness of mounting surface should be within 0.1 mm/500 mm.

Unevenness of a workpiece or base mounted on the body of the product may cause play in the guide and an increase in the sliding resistance.

10. When mounting the product, keep a 40 mm or longer diameter for bends in the cable.

11. Do not hit the table with the workpiece in the positioning operation and positioning range.

12. There is a type where grease is applied to the dust seal band for sliding. When wiping off the grease to remove foreign matter, etc., be sure to apply grease again.

13. For bottom mounting, the dust seal band may be deflected.



LEF Series Electric Actuator Specific Product Precautions 2

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 3 to 8 for Electric Actuator Precautions.


Handling

⚠ Caution

14. When mounting the product, use screws with adequate length and tighten them with adequate torque.


Tightening the screws with a higher torque than recommended may cause a malfunction and/or decrease in guide accuracy, whilst the tightening with a lower torque can cause the displacement of the mounting position or in extreme conditions the actuator could become detached from its mounting position.

Body fixed



Model	Screw size	Max. tightening torque [N·m]	ϕA [mm]	L [mm]
LEF□16	M3	0.6	3.5	20
LEF□25	M4	1.5	4.5	24
LEF□32	M5	3.0	5.5	30
LEF□40	M6	5.2	6.6	31


Body mounting

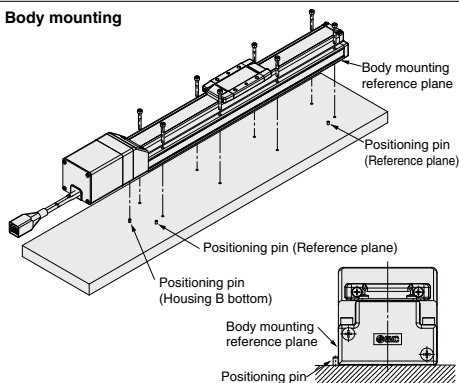

The traveling parallelism is the reference plane for the body mounting reference plane.

If the traveling parallelism for a table is required, set the reference plane against parallel pins etc.

Workpiece fixed



Model	Screw size	Max. tightening torque [N·m]	L (Max. screw-in depth) [mm]
LEF□16	M4 x 0.7	1.5	6
LEF□25	M5 x 0.8	3.0	8
LEF□32	M6 x 1	5.2	9
LEFS40	M8 x 1.25	12.5	13

To prevent the workpiece retaining screws from touching the body, use screws that are 0.5 mm or shorter than the maximum screw-in depth. If long screws are used, they can touch the body and cause a malfunction.

15. Do not operate by fixing the table and moving the actuator body.

16. The belt drive actuator cannot be used vertically for applications.

17. Check the specifications for the minimum speed of each actuator.

Otherwise, unexpected malfunctions, such as knocking, may occur.

18. In the case of the belt drive actuator, vibration may occur during operation at speeds within the actuator specifications, this could be caused by the operating conditions. Change the speed setting to a speed that does not cause vibration.

19. When the fluctuation of load is caused during operation, malfunction/noise/alarm may occur. (In case of AC servo motor)

The tuning of gain may not suit for fluctuation load. Adjust the gain properly by following the manual of driver.

Maintenance

⚠ Warning

Maintenance frequency

Perform maintenance according to the table below.

Frequency	Appearance check	Internal check	Belt check
Inspection before daily operation	○	—	—
Inspection every 6 months/1000 km/ 5 million cycles*	○	○	○

* Select whichever comes first.

• Items for visual appearance check

1. Loose set screws, Abnormal dirt
2. Check of flaw and cable joint
3. Vibration, Noise

• Items for internal check

1. Lubricant condition on moving parts.
2. Loose or mechanical play in fixed parts or fixing screws.

• Items for belt check

Stop operation immediately and replace the belt when belt appear to be below. Further, ensure your operating environment and conditions satisfy the requirements specified for the product.

a. Tooth shape canvas is worn out.

Canvas fiber becomes fuzzy. Rubber is removed and the fiber becomes whitish. Lines of fibers become unclear.

b. Peeling off or wearing of the side of the belt

Belt corner becomes round and frayed thread sticks out.

c. Belt partially cut

Belt is partially cut. Foreign matter caught in teeth other than cut part causes flaw.

d. Vertical line of belt teeth

Flaw which is made when the belt runs on the flange.

e. Rubber back of the belt is softened and sticky.

f. Crack on the back of the belt