

Air Cylinder


CG1 Series

ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

RoHS

Female rod end available as standard


Rod end types suitable for the application can be selected.

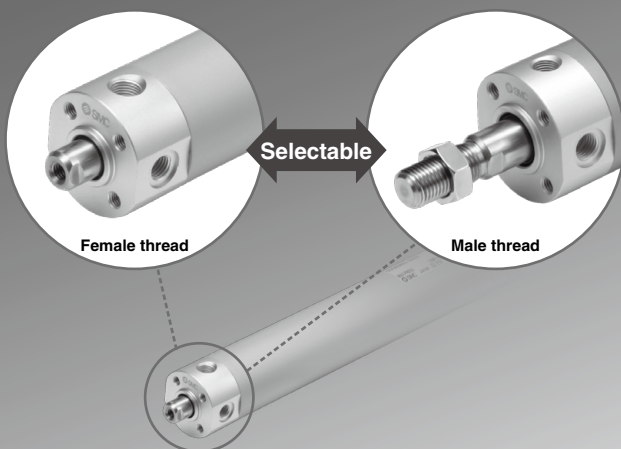

Easy fine adjustment of auto switch position


Fine adjustment of the auto switch position is possible by simply loosening the screw attached to the auto switch.

Transparent switch bracket improves visibility of indicator LED.

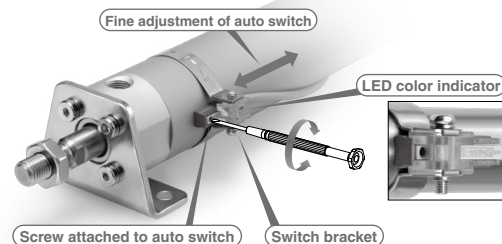

No trunnion mounting female thread added to basic type variation

No foreign matter accumulation due to the simple construction

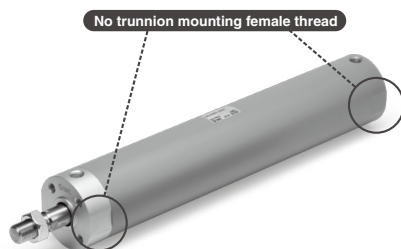

CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

D-□
-X□
Technical Data

Part numbers with rod end bracket and/or pivot bracket available

Not necessary to order a bracket for the applicable cylinder separately

(Note) Mounting bracket is shipped together with the product, but not assembled.

Example) CDG1 **D** N20-50Z- **N** **W** -M9BW

• Mounting

Pivot bracket

Nil	None
N	Pivot bracket is shipped together with the product, but not assembled.

N: Kit of pivot bracket and clevis



T: Kit of pivot bracket and trunnion



Rod end bracket

Nil	None
V	Single knuckle joint
W	Double knuckle joint

With rod end bracket


V: Single knuckle joint **W**: Double knuckle joint



* Applicable to only mounting D, U and T.

Various mounting bracket options

- Suitable mounting brackets can be selected for the installation condition.
- Improved amount of mounting freedom

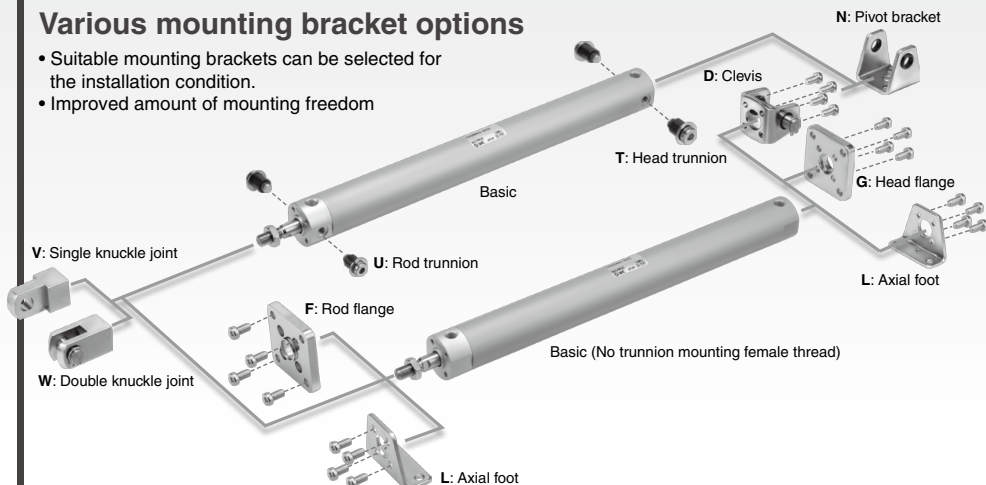

Easy fine adjustment of auto switch position

Fine adjustment of the auto switch set position can be performed by loosening the auto switch attached screw without loosening the auto switch mounting band. Operability improved compared with the current auto switch set position adjustment, where the complete switch mounting band requires loosening.



Switch bracket

Switch holder

Screw attached to auto switch

Auto switch

Visibility of the indicator LED improved with the transparent resin switch bracket (Standard specification)

Auto switch mounting band

Auto switch mounting screw

No environmental hazardous substances used

Compliant with EU RoHS directive.

Lead free bushing is used as sliding material.

Specifications, performance and mounting method are same as the current product.

Grease is selectable. (Option)

- Grease for food processing equipment (XC85)
- PTFE grease (X446)

Water resistant compact auto switch now available

- Solid state auto switch D-M9□A(V)

Stroke Variations

Bore size (mm)	Standard stroke (mm)								
	25	50	75	100	125	150	200	250	300
20	●	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●	●
32	●	●	●	●	●	●	●	●	●
40	●	●	●	●	●	●	●	●	●
50	●	●	●	●	●	●	●	●	●
63	●	●	●	●	●	●	●	●	●
80	●	●	●	●	●	●	●	●	●
100	●	●	●	●	●	●	●	●	●

Series Variations

* For details about the clean series, refer to the "Pneumatic Clean Series" (CAT.E02-23).

Series	Action	Type	Cushion	Bore size (mm)							Variations			Page	
				20	25	32	40	50	63	80	100	With rod boot	Air-hydro		Clean series
Standard CG1-Z	Double acting	Single rod	Rubber bumper												Page 292
			Air cushion												
	Double acting	Double rod	Rubber bumper												Page 310
			Air cushion												
	Single acting	Single rod (Spring return /extend)	Rubber bumper											Page 318	
			Air cushion												
	Non-rotating rod CG1K-Z	Double acting	Single rod	Rubber bumper											Page 325
Air cushion															
Double acting		Double rod	Rubber bumper											Page 330	
			Air cushion												
Direct mount CG1R-Z	Double acting	Single rod	Rubber bumper											Page 334	
			Air cushion												
Direct mount, Non-rotating rod CG1KR-Z	Double acting	Single rod	Rubber bumper											Page 339	
			Air cushion												
With end lock CBG1	Double acting	Single rod	Rubber bumper											Page 343	
			Air cushion												
Smooth Cylinder CG1Y-Z	Double acting	Single rod	Rubber bumper											Best Pneumatics No. 2-3	
Low friction CG1□Q															

Use the new series “Smooth Cylinder CG1Y Series” to realize both-direction low friction and low-speed operation.
(Refer to the Best Pneumatics No. 2-3.)

CG3 series		
Short type Standard CG3 	Double acting	Single rod

Use the new series "Smooth Cylinder CG1Y Series" to realize both-direction low friction and low-speed operation. (Refer to the Best Pneumatics No. 2-3.)

Page 363

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data

Combinations of Standard Products and Made to Order Specifications

CG1 Series

- : Standard
- ◎ : Made to Order
- : Special product (Please contact SMC for details.)
- : Not available

Series	Action/ Type	Cushion Page	Applicable bore size	CG1 (Standard type)				CG1K (Non-rotating rod type)			
				Double acting		Single acting		Double acting			
				Single rod		Double rod		Single rod		Double rod	
				Rubber	Air	Rubber	Air	Rubber	Rubber	Air	Rubber
				Page 292	Page 310	Page 318	Page 318	Page 318	Page 325	Page 325	Page 330
Symbol	Specifications			e20 to e100				e20 to e40	e20 to e63	e40 to e63	e20 to e63
Standard	Standard			●	●	●	●	●	●	●	●
Long st	Long stroke	e20 to e100		●	●	●	●	○	● ^{Note 1)}	● ^{Note 1)}	● ^{Note 1)}
D	Built-in magnet			●	●	●	●	●	●	●	●
CG1□F	With One-touch fittings ^{Note 15)}	e20 to e63		●	○	○	○	○	○	○	○
CG1□-□ _k	With rod boot	e20 to e100		● ^{Note 1)}	● ^{Note 1)}	● ^{Note 1)}	● ^{Note 1)}	○	○	○	○
CG1□H	Air-hydro type	e20 to e63		●	—	●	—	—	—	—	—
10-, 11-	Clean series	e20 to e100		●	● ^{Note 1)}	●	● ^{Note 1)}	○	—	—	—
25A- ^{Note 9)}	Copper (Cu) and Zinc (Zn)-free ^{Note 15)}	e20 to e100		●	●	○	○	○	○	○	○
20- ^{Note 9)}	Copper ^{Note 8)} and Fluorine-free	e20 to e100		●	●	●	●	○	●	○	●
CG1□ _R	Water resistant	e32 to e100		●	●	●	●	○	—	—	—
CG1□M	Cylinder with stable lubrication function (Lube-retainer)	e20 to e100		●	○	○	○	—	—	—	—
XB6	Heat resistant cylinder (-10 to 150°C) ^{Note 7)}	e20 to e100		◎ ^{Note 2)}	◎	◎ ^{Note 2)}	◎	○	—	—	—
XB7	Cold resistant cylinder (-40 to 70°C) ^{Note 7)}			◎ ^{Note 2)}	○	◎ ^{Note 2)}	○	○	—	—	—
XB9	Low speed cylinder (10 to 50 mm/s)			◎	○	○	○	—	—	—	—
XB13	Low speed cylinder (5 to 50 mm/s)			◎	○	○	○	—	—	—	—
XC4	With heavy duty scraper	e32 to e63		◎	◎	○	○	○	—	—	—
XC6	Made of stainless steel	e20 to e100		◎	◎	◎	◎	◎ ^{Note 6)}	—	—	—
XC8	Adjustable stroke cylinder/Adjustable extension type	e20 to e63		◎	◎	—	—	○	◎	○	—
XC9	Adjustable stroke cylinder/Adjustable retraction type			◎	◎	—	—	○	◎	○	—
XC10	Dual stroke cylinder/Double rod type			◎	◎	—	—	○	◎	◎	—
XC11	Dual stroke cylinder/Single rod type			◎	◎	—	—	—	◎	○	—
XC12	Tandem cylinder			◎	○	—	—	—	◎ ^{Note 15)}	○	○
XC13	Auto switch rail mounting	e20 to e100		◎	◎	◎	◎	○	◎	○	○
XC20	Head cover axial port	e20 to e63		◎	○	—	—	◎	◎	○	—
XC22	Fluororubber seal			◎ ^{Note 2)}	◎	◎ ^{Note 2)}	◎	○	○	○	○
XC27	Double clevis and double knuckle joint pins made of stainless steel	e20 to e100		◎	◎	○	○	◎	◎	◎	○
XC29	Double knuckle joint with spring pin			◎	◎	○	○	◎ ^{Note 6)}	○	○	○
XC35	With coil scraper	e20 to e63		◎	◎	○	○	○	—	—	—
XC37	Larger throttle diameter of connection port			◎	◎	◎	◎	○	○	○	○
XC42	Built-in shock absorber in head cover side			◎	◎	—	—	○	○	○	—
XC85	Grease for food processing equipment	e20 to e100		◎	◎	◎	◎	◎	○	○	○
X446	PTFE grease	e20 to e100		◎	◎	○	○	○	—	—	—

Note 1) e40 to e63 only

Note 2) Without bumper

Note 3) e32 to e100 only

Note 4) SV type only (Heat resistant grease is used.)

Note 5) e20 to e63 only

Note 6) Single acting/spring return type (S) only

Note 7) The products with an auto switch are not compatible.

Use the new series "Smooth Cylinder CG1Y Series" to realize both-direction low friction and low-speed operation. (Refer to the Best Pneumatics No. 2-3.)

CG1R (Direct mount type)		CG1KR (Direct mount, Non-rotating rod type)		CBG1 ^{Note 15)} (With end lock)		CG1□Y ^{Note 12)} (Smooth Cylinder)	CG1□Q (Low friction type)	Symbol	
Double acting		Double acting		Double acting		Double acting	Double acting		
Single rod		Single rod		Single rod		Single rod	Single rod		
Rubber	Air	Rubber		Rubber	Air	—	—		
Page 334		Page 339		Page 343		Best Pneumatics No. 2-3			Page 354
ø20 to ø63		ø20 to ø63		ø20 to ø100		ø20 to ø100			ø20 to ø100
●	●	●		●	●	●	●	Standard	
○	○	○		●	●	● ^{Note 10)}	●	Long st	
●	●	●		●	●	●	●	D	
○	○	○		○	○	○	○	CG1□F	
○	○	○		●	●	○	○	CG1□-□ _K	
○	—	—		—	—	—	—	CG1□H	
●	○	—		○	○	—	—	10-, 11-	
○	○	○		○	○	○	○	25A- ^{Note 9)}	
●	●	○		○	○	—	—	20- ^{Note 9)}	
○	○	—		○	○	—	—	CG1□ _R ^Y	
○	○	—		—	—	—	—	CG1□M	
◎ ^{Note 2)}	◎	—		○	○	—	—	XB6	
◎ ^{Note 2)} ^{Note 15)}	○	—		—	—	—	—	XB7	
◎ ^{Note 15)}	○	—		○	○	—	—	XB9	
◎ ^{Note 15)}	○	—		—	—	—	—	XB13	
○	○	—		○	○	—	—	XC4	
◎	◎	—		○	○	◎	◎	XC6	
◎	○	◎ ^{Note 15)}		○ ^{Note 13)}	○ ^{Note 13)}	○	○	XC8	
◎	○	◎ ^{Note 15)}		○ ^{Note 14)}	○ ^{Note 14)}	○	○	XC9	
○	○	○		○	○	○	○	XC10	
○	○	○		○	○	○	○	XC11	
○	○	○		○	○	—	—	XC12	
◎	○	○		◎	◎	○	○	XC13	
◎	○	◎ ^{Note 15)}		○	○	◎	○	XC20	
◎ ^{Note 2)}	◎	○		○	○	—	—	XC22	
○	○	○		○	○	◎	○	XC27	
○	○	○		○	○	○	○	XC29	
○	○	—		○	○	—	—	XC35	
○	○	○		○	○	○	○	XC37	
○	○	○		○	○	—	—	XC42	
◎	◎	○		○	○	—	—	XC85	
◎	◎	—		—	—	—	—	X446	

Note 8) Copper-free for the externally exposed part. For details, refer to the **Web Catalog**.

Note 9) For details, refer to the **Web Catalog**.

Note 10) Long stroke is beyond the performance guarantee.

Note 11) Female rod end is available as a special order.

Note 12) For details about the smooth cylinder, refer to the Best Pneumatics No. 2-3.

Note 13) Available only for locking at head end.

Note 14) Available only for locking at rod end.

Note 15) The shape is the same as the current product.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical
Data

Air Cylinder: Standard Type Double Acting, Single Rod

CG1 Series

ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

RoHS

How to Order



CG1 **B** **N** **20** **-100** **Z** **-** **-** **-**

With auto switch

CDG1 **B** **N** **20** **-100** **Z** **-** **-** **-** **M9BW** **-** **-**

With auto switch
(Built-in magnet)

Mounting

B	Basic
Z*	Basic (without trunnion mounting female thread)
L	Axial foot
F	Rod flange
G	Head flange
U*	Rod trunnion
T*	Head trunnion
D	Clevis

- * Not available for ø80 and ø100.
- * Mounting bracket is shipped together with the product, but not assembled.
- * The cylinder for F, G, L, D mounting types is Z: Basic (without trunnion mounting female thread).

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm
80	80 mm
100	100 mm

Type

N	Rubber bumper
A	Air cushion

Port thread type

Rubber bumper			Air cushion		
	Rc	ø20 to ø100	M5 x 0.8	ø20, ø25	
NI	NPT	ø20 to ø100	NPT*	ø32 to ø100	
TF	M5 x 0.8	ø20, ø25	G*	ø32 to ø100	
	G	ø32 to ø100			

* Not available for ø20 and ø25.

Pivot bracket

Nil	None
N	Pivot bracket is shipped together with the product, but not assembled

- * Only for D, U, T mounting types
- * Pivot bracket is shipped together with the product, but not assembled.

Rod end bracket

Nil	None
V	Single knuckle joint
W	Double knuckle joint

- * No bracket is provided for the female rod end.
- * Rod end bracket is shipped together with the product, but not assembled.
- * A knuckle joint pin is not provided with the single knuckle joint.

Made to Order

For details, refer to page 293.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
------------	---------------------

- * For applicable auto switches, refer to the table below.

Suffix for cylinder (Rod boot)

Nil	Without rod boot
J	Nylon tarpaulin
K	Heat resistant tarpaulin

- * In the case of w/rod boot, and a foot bracket or rod flange as a bracket, those parts are to be assembled at the time of shipment.
- * For female rod end, no rod boot is provided.

Rod end thread

Nil	Male rod end
F	Female rod end

Cylinder stroke (mm)

Refer to "Standard Strokes" on page 293.

* Refer to "Ordering Example of Cylinder Assembly" on page 294.

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model Applicable bore size				Lead wire length (m)					Pre-wired connector	Applicable load		
					DC	AC	ø20 to ø63		ø80, ø100	0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)					
							Perpendicular	In-line							In-line				
Solid state auto switch	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	5 V, 12 V	12 V	M9NV	M9N	G59	●	●	●	●	○	—	IC circuit	Relay, PLC		
				3-wire (PNP)			M9PV	M9P	G5P	●	●	●	●	○					
				2-wire			M9BV	M9B	G5P	●	●	●	●	○					
		Connector		3-wire (NPN)	24 V	5 V, 12 V	—	H7C	K59	●	●	●	●	○	—	IC circuit			
				3-wire (PNP)			M9NVV	M9NV	G59W	●	●	●	●	○					
				2-wire			M9PVV	M9PW	G5PW	●	●	●	●	○					
	Water resistant (2-color indicator)	Grommet		3-wire (NPN)	5 V, 12 V	12 V	M9BWW	M9BW	G5PW	●	●	●	●	○	—	IC circuit			
				3-wire (PNP)			M9NAV ^{*1}	M9NA ^{*1}	—	○	○	○	○	○					
				2-wire			M9PAV ^{*1}	M9PA ^{*1}	—	○	○	○	○	○					
		With diagnostic output (2-color indicator)		Connector	4-wire (NPN)	5 V, 12 V	12 V	M9BAV ^{*1}	M9BA ^{*1}	G5BA ^{*1}	●	●	●	●	○	—		IC circuit	
					3-wire (Equiv. to NPN)			—	H7NF	G59F	●	●	●	●	○				
					—			5 V	—	A96V	A96	—	—	●	●				●
Reed auto switch	Diagnostic indication (2-color indicator)	Grommet	Yes	2-wire	24 V	12 V	A93V ^{*2}	A93	—	●	●	●	●	○	—	IC circuit	Relay, PLC		
				—			100 V or less	A90V	A90	—	—	●	●	●				●	○
				—			100 V, 200 V or less	—	—	—	B54	B64	●	●				●	●
		Connector		2-wire	24 V or less	—	C73C	—	●	●	●	●	○	—	IC circuit				
				—		—	C80C	—	●	●	●	●	○						
				—		—	—	B59W	—	●	●	●	●			○			


- *1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.
- * A water-resistant type cylinder is recommended for use in an environment which requires water resistance. However, please contact SMC for water-resistant cylinder of ø20 and ø25.
- *2 1 m type lead wire is only applicable to D-A93.
- * Lead wire length symbols: 0.5 m..... Nil (Example) M9NW 1 m..... M (Example) M9NWM 3 m..... L (Example) M9NWL 5 m..... Z (Example) M9NWZ None..... N (Example) H7CN
- * Solid state auto switches marked with "○" are produced upon receipt of order.
- * Since there are other applicable auto switches than listed above, refer to page 361 for details.
- * For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.
- * The D-A9□□/M9□□ auto switches are shipped together, (but not assembled). (However, only the auto switch mounting brackets are assembled before shipment.)



Symbol

Rubber bumper

Air cushion



Made to Order: Individual Specifications
(For details, refer to page 362.)

Symbol	Specifications
-XA46	PTFE grease

Made to Order

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat resistant cylinder (-10 to 150°C)*1
-XB7	Cold resistant cylinder (-40 to 70°C)*2
-XB9	Low speed cylinder (10 to 50 mm/s)
-XB13	Low speed cylinder (5 to 50 mm/s)
-XC4	With heavy duty scraper
-XC6	Made of stainless steel
-XC8	Adjustable stroke cylinder/Adjustable extension type
-XC9	Adjustable stroke cylinder/Adjustable retraction type
-XC10	Dual stroke cylinder/Double rod type
-XC11	Dual stroke cylinder/Single rod type
-XC12	Tandem cylinder
-XC13	Auto switch rail mounting
-XC20	Head cover axial port
-XC22	Fluororubber seal*1
-XC27	Double clevis and double knuckle joint pins made of stainless steel
-XC29	Double knuckle joint with spring pin
-XC35	With coil scraper
-XC37	Larger throttle diameter of connection port
-XC42	Built-in shock absorber in head cover side
-XC85	Grease for food processing equipment

*1 Cylinders with rubber bumper have no bumper.

*2 Only compatible with cylinders with rubber bumper, but has no bumper.

Refer to pages 355 to 361 for cylinders with auto switches.
<ul style="list-style-type: none"> Auto switch proper mounting position (detection at stroke end) and its mounting height Minimum stroke for auto switch mounting Auto switch mounting brackets/Part no. Operating range Cylinder mounting bracket, by stroke/Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Specifications

Bore size (mm)			20	25	32	40	50	63	80	100
Action			Double acting, Single rod							
Lubricant			Not required (Non-lube)							
Fluid			Air							
Proof pressure			1.5 MPa							
Maximum operating pressure			1.0 MPa							
Minimum operating pressure			0.05 MPa							
Ambient and fluid temperature			Without auto switch : -10°C to 70°C (No freezing) With auto switch : -10°C to 60°C							
Piston speed			50 to 1000 mm/s							50 to 700 mm/s
Stroke length tolerance			Up to 1000 st ^{+1.4} ₀ mm, Up to 1500 st ^{+1.8} ₀ mm							
Cushion			Rubber bumper, Air cushion							
Mounting**			Basic, Basic (without trunnion mounting female thread), Axial foot, Rod flange, Head flange, Rod trunnion, Head trunnion, Clevis							
Allowable kinetic energy (J)	Rubber bumper	Male rod end	0.28	0.41	0.66	1.20	2.00	3.40	5.90	9.90
		Female rod end	0.11	0.18	0.29	0.52	0.91	1.54	2.71	4.54
	Air cushion	Male rod end	R: 0.35 H: 0.42	R: 0.56 H: 0.65	0.91	1.80	3.40	4.90	11.80	16.70
		Female rod end	0.11	0.18	0.29	0.52	0.91	1.54	2.71	4.54

* R: Rod side, H: Head side

** Cylinder sizes ø80 and ø100 do not have basic (without trunnion mounting female thread), rod trunnion and head trunnion types. Foot, flange and clevis types of cylinder sizes from ø20 to ø63 do not have trunnion mounting female thread. Operate the cylinder within the allowable kinetic energy.

Accessories

Refer to page 309 for part numbers and dimensions.

Mounting		Basic	Axial foot	Rod flange	Head flange	Rod trunnion	Head trunnion	Clevis
Standard	Rod end nut	●	●	●	●	●	●	●
	Clevis pin	—	—	—	—	—	—	●
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint (with pin)**	●	●	●	●	●	●	●
	Pivot bracket*	—	—	—	—	●*	●*	●
	Rod boot	●	●	●	●	●	●	●

* Not available for ø80 and ø100.

** A double knuckle joint pin and retaining rings are shipped together.

Standard Strokes

			(mm)
Bore size	Standard stroke (Note 1)	Maximum manufacturable stroke (Note 2)	
20	25, 50, 75, 100, 125, 150, 200	201 to 1500	
25	25, 50, 75, 100, 125, 150, 200, 250, 300	301 to 1500	
32			
40			
50, 63			
80			
100			

Note 1) Intermediate strokes not listed above are produced upon receipt of order. Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Note 2) The maximum manufacturable stroke shows the long stroke.

Note 3) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2
D-□
-X□
Technical Data

Ordering Example of Cylinder Assembly

Cylinder model: CDG1DN20-100Z-NW-M9BW

Mounting

Pivot bracket

Rod end bracket


Auto switch D-M9BW: 2 pcs.

D: Clevis

N: Yes

W: Double knuckle joint

*Pivot bracket, double knuckle joint and auto switch are shipped together with the product, but not assembled.

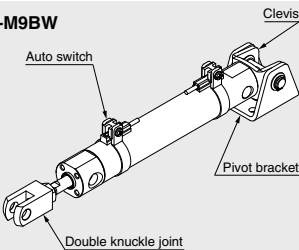

Rod Boot Material

Symbol	Rod boot material	Maximum operating temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

* Maximum ambient temperature for the rod boot itself.

Mounting Brackets/Part No.

Mounting bracket	Order qty	Bore size (mm)								Contents
		20	25	32	40	50	63	80	100	
Axial foot	2 (Note)	CG-L020	CG-L025	CG-L032	CG-L040	CG-L050	CG-L063	CG-L080	CG-L100	2 feet, 8 mounting bolts
Flange	1	CG-F020	CG-F025	CG-F032	CG-F040	CG-F050	CG-F063	CG-F080	CG-F100	1 flange, 4 mounting bolts
Trunnion pin	1	CG-T020	CG-T025	CG-T032	CG-T040	CG-T050	CG-T063	—	—	2 trunnion pins, 2 trunnion bolts, 2 flat washers
Clevis	1	CG-D020	CG-D025	CG-D032	CG-D040	CG-D050	CG-D063	CG-D080	CG-D100	1 clevis, 4 mounting bolts, 1 clevis pin, 2 retaining rings
Pivot bracket	1	CG-020-24A	CG-025-24A	CG-032-24A	CG-040-24A	CG-050-24A	CG-063-24A	CG-080-24A	CG-100-24A	1 pivot bracket

Note) Order two feet per cylinder.

Mounting Brackets, Accessories/Material, Surface Treatment


Segment	Description		Material	Surface treatment
Mounting brackets	Foot		Carbon steel	Nickel plating
	Flange		Carbon steel (ø20 to ø63)	Nickel plating
			Cast iron (ø80, ø100)	Nickel plating
			Carbon steel (ø20 to ø63)	Nickel plating
	Clevis		Cast iron (ø80, ø100)	Nickel plating
	Trunnion pin	Trunnion pin	Carbon steel	Salt-bath nitrocarburizing
		Trunnion bolt	Carbon steel	Nickel plating
Flat washer		Carbon steel	Nickel plating	
Accessories	Rod end nut		Carbon steel	Zinc chromated
	Single knuckle joint		Carbon steel (ø20 to ø32)	Nickel plating
			Cast iron (ø40 to ø100)	Zinc chromated
	Double knuckle joint		Carbon steel (ø20 to ø32)	Nickel plating
			Cast iron (ø40 to ø100)	Zinc chromated
	Knuckle pin		Carbon steel	—
	Clevis pin		Carbon steel	—
	Pivot bracket		Carbon steel (ø20 to ø63)	Nickel plating
			Cast iron (ø80, ø100)	Nickel plating
	Mounting bolt		Carbon steel	Nickel plating
Retaining ring		Carbon tool steel	Phosphate coating	

Mounting Procedure

Mounting procedure for trunnion

Follow the procedures below when mounting a pivot bracket on the trunnion.


ø20 to ø63

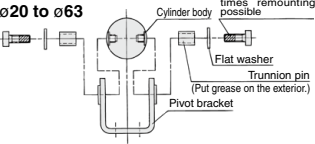


Mounting procedure for clevis

Follow the procedures below when mounting a pivot bracket on the clevis.

ø20 to ø63

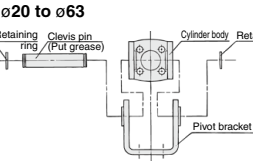

ø80, ø100

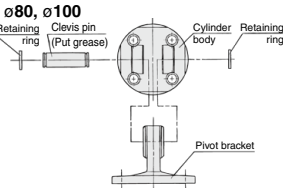

Weights

		(kg)							
Basic weight	Bore size (mm)	20	25	32	40	50	63	80	100
	Basic (B)	0.11	0.17	0.24	0.44	0.79	1.06	2.07	3.16
	Basic (Z)	0.11	0.17	0.25	0.45	0.80	1.09	—	—
	Axial foot	0.21	0.29	0.40	0.67	1.26	1.77	3.04	4.91
	Flange	0.18	0.26	0.38	0.65	1.16	1.64	2.78	4.44
	Trunnion	0.12	0.19	0.28	0.49	0.88	1.20	—	—
Additional weight	Clevis	0.17	0.25	0.39	0.68	1.19	1.78	2.77	4.44
	Pivot bracket	0.08	0.09	0.17	0.25	0.44	0.80	0.98	1.75
	Single knuckle joint	0.05	0.09	0.09	0.10	0.22	0.22	0.39	0.57
	Double knuckle joint (with pin)	0.05	0.09	0.09	0.13	0.26	0.26	0.64	1.31
	Additional weight per 50 mm of stroke	0.05	0.07	0.09	0.14	0.21	0.25	0.35	0.50
	Additional weight for switch magnet	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.04
Weight reduction	Additional weight with air cushion	0	0.01	0.04	0	0.01	0.04	0	0.04
	Weight reduction for female rod end	-0.01	-0.02	-0.02	-0.05	-0.10	-0.10	-0.19	-0.27
	Additional weight for long stroke	0.01	0.01	0.02	0.03	0.06	0.12	0.21	0.31

Calculation (Example) **CDG1FN20-100Z**
(Built-in magnet, Flange, ø20, 100 stroke)

- Basic weight 0.18 kg (Flange, ø20)
 - Additional weight for stroke 0.05 kg/50 mm
 - Air cylinder stroke 100 mm
 - Additional weight for switch magnet 0.01 kg
- 0.18 + 0.05 x (100/50) + 0.01 = **0.29 kg**

Built-in One-touch Fittings (The shape is the same as the current product.)

CG1 **Mounting type** N **Bore size** F - **Stroke**

• Built-in One-touch fittings

This type has the One-touch fittings integrated in a cylinder, which enables to reduce the piping labor and installing space dramatically.

Dimensions (Dimensions other than those shown below are the same as the standard type.)

Technical drawing of a hydraulic cylinder. The drawing shows a cross-section of the cylinder with a piston rod. Key dimensions are labeled: GA (total length), GB (cylinder body length), eHD (piston rod diameter), ePD (piston rod diameter at the end), and L (stroke length). The drawing also shows the cylinder mounting bracket and the piston rod end cap.

Bore size (mm)	GA	GB	HD	HH	PD
20	12	12	13	24.2	6
25	12	10 (12)	13	26.7	6
32	12	10 (12)	13	30.2	6
40	12	10 (12)	16	34.6	8
50	13	13	20	40.6	10
63	13	13	20	47.1	10

Note) (): Long stroke

Specifications

Bore size (mm)	20, 25, 32, 40, 50, 63
Action	Double acting
Fluid	Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.05 MPa
Piston speed	50 to 750 mm/s
Cushion	Rubber bumper
Mounting	Basic, Axial foot, Rod flange, Head flange, Rod trunnion, Head trunnion, Clevis (used for changing the port location by 90°)

- Auto switch can be mounted.
- Female rod end is not available.
- Use the current seal kit.

Applicable Tubing O.D./I.D.

Bore size (mm)	20	25	32	40	50	63
Applicable tubing O.D. (mm)	6/4	6/4	6/4	8/6	10/7.5	10/7.5
Applicable tubing material	Can be used for either nylon, soft nylon or polyurethane tubing.					

Clean Series

10-CG1 **Mounting type** **Type (Cushion)** **Bore size** - **Stroke** **Rod end thread** Z

• Clean Series (With relief port)

The type which is applicable for using inside the clean room graded ISO Class 4 by making an actuator's rod section a double seal construction and discharging by relief port directly to the outside of clean room.

For details about the clean series, refer to the "Pneumatic Clean Series" (CAT.E02-23).

Specifications

Bore size (mm)	20, 25, 32, 40, 50, 63, 80, 100
Action	Double acting
Fluid	Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.05 MPa
Cushion	Rubber bumper, Air cushion
Piston speed	30 to 400 mm/s
Relief port size	M5 x 0.8
Mounting	Basic, Axial foot, Rod flange, Head flange**

- Auto switch can be mounted.
- ** The basic type is B type only. However, no trunnion mounting female thread is provided.

CG1 Series

Air-hydro

CGD1

Mounting type

H

Bore size

Stroke

Rod end thread

Z

Pivot bracket

Rod end bracket

Auto switch

Nil Without magnet

D Built-in magnet


Air-hydro

Made to Order

-XA

Low pressure hydraulic cylinder of 1.0 MPa or less
When using together with the CC series air-hydro unit, constant and low speed actuation and intermediate stopping similar to hydraulic units are possible with the use of valves and other pneumatic equipment.

Dimensions (Dimensions other than those shown below are the same as the standard type.)

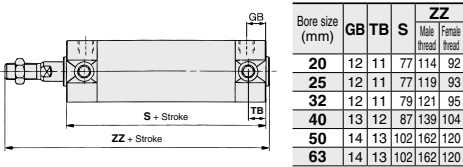

Specifications

Bore size (mm)	20, 25, 32, 40, 50, 63
Action	Double acting
Fluid	Turbine oil
Proof pressure	1.5 MPa
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.18 MPa
Piston speed	15 to 300 mm/s
Cushion	Rubber bumper (Standard equipment)
Ambient and fluid temperature	5 to 60°C
Mounting	Basic, Axial foot, Rod flange, Head flange, Rod trunnion, Head trunnion, Clevis
Made to Order	Change of rod end shape

* Auto switch can be mounted.

Water Resistant

CGD1

Mounting type

Type

Bore size

Port thread type

R

Stroke

Rod end thread

Z

Pivot bracket

Rod end bracket

Auto switch

Nil Without magnet

D Built-in magnet

Water resistant cylinder

R NBR seals (Nitrile rubber)

V FKM seals (Fluororubber)

Water resistant 2-color indicator, solid state auto switch

M9(A)(V) ø32 to ø63

G5BAL ø80, ø100

Made to Order

XC6

Caution

Since the scraper is press-fit into the rod cover, it cannot be replaced.

Applicable for use in an environment with water splashing such as food processing and car wash equipment, etc.


Specifications

Bore size (mm)	32, 40, 50, 63, 80, 100
Action	Double acting, Single rod
Cushion	Rubber bumper/Air cushion
Auto switch mounting	Band mounting type
Made to Order	XC6: Made of stainless steel

* Specifications other than above are the same as standard type.

Dimensions (Dimensions other than those shown below are the same as the standard type.)

With rubber bumper

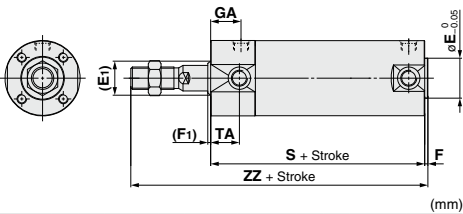


Bore size	(E)	E*	(F)	F*	GA			S	TA	WA	ZZ	
					Rc	NPT	G				Male thread	Female thread
32	17	18	2	2	18	16.5	77 (85)	17	22	119 (127)	93 (101)	
40	21	25	2	2	19	19	84 (93)	18	23	136 (145)	101 (110)	
50	26	30	2	2	21	21	97 (109)	20	25	157 (169)	115 (127)	
63	26	32	2	2	21	21	97 (109)	20	25	157 (169)	115 (127)	
80	32	40	3	3	28	25.5 116 (130)		—	32	190 (204)	138 (152)	
100	37	50	3	3	29	26.5 117 (131)		—	33	191 (205)	142 (156)	

* Dimensions marked with "*" are the same as the standard type.

* (): Denotes the dimensions for long stroke.

With air cushion

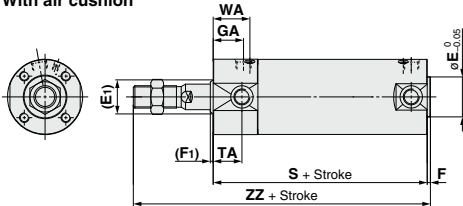

Refer to page 1125 for details.

Cylinder with Stable Lubrication Function (Lube-retainer)

CDG1 Mounting N Bore size M - Stroke Rod end thread Z - Pivot bracket Rod end bracket - Auto switch

• With auto switch
(Built-in magnet)

• Cylinder with Stable Lubrication Function
(Lube-retainer)




Specifications

Bore size (mm)	20, 25, 32, 40, 50, 63, 80, 100
Action	Double acting, Single rod
Minimum operating pressure	0.1 MPa
Cushion	Rubber bumper

* Specifications other than the above are the same as the standard type.

Dimensions (Dimensions other than those shown below are the same as the standard type.)

* No runnon mounting female thread is provided on the rod side. (For B: Basic)

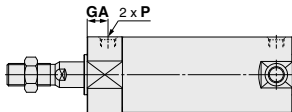

Refer to the **Web Catalog** for details.

(mm)

Bore size	GA	P
20	14	M5 x 0.8
25	13	M5 x 0.8
32	(12)	(Rc 1/8)
40	(13)	(Rc 1/8)
50	(14)	(Rc 1/4)
63	(14)	(Rc 1/4)
80	(20)	(Rc 3/8)
100	(20)	(Rc 1/2)

* When female thread is used, use a washer, etc. to prevent the contact part at the rod end from being deformed depending on the material of the workpiece.

(): Same as the standard model.

* The mounting dimensions of the mounting bracket are the same as the standard type.

CG1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2


D-□

-X□


Technical
Data

Construction

With rubber bumper

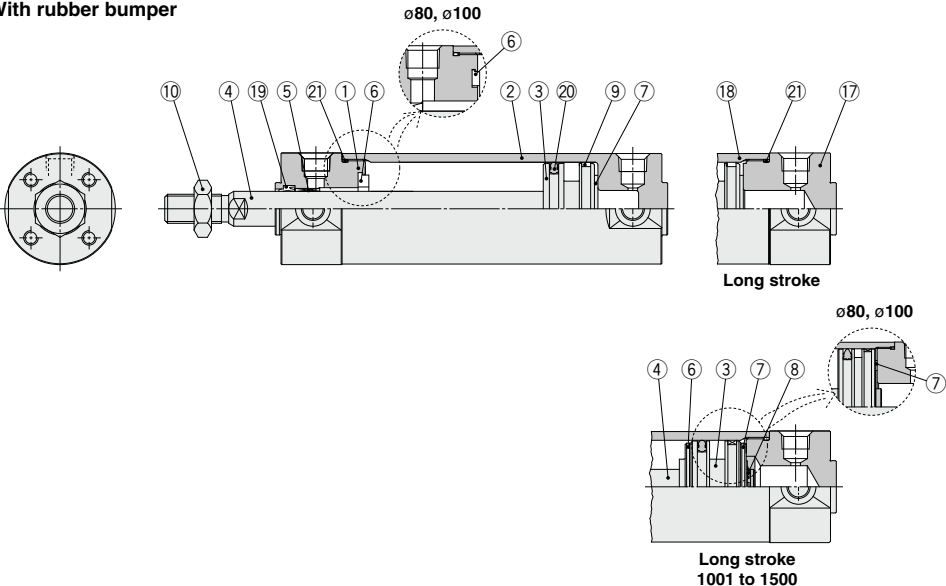

With air cushion

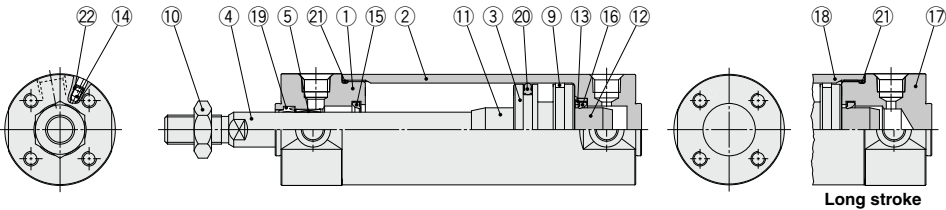

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Hard anodized
2	Tube cover	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel	For ø20 or ø25 with built-in magnet
5	Bushing	Carbon steel*	Hard chrome plating*
6	Bumper	Bearing alloy	
7	Bumper	Resin	ø32 or larger is common.
8	Retaining ring	Stainless steel	Except ø80 and ø100
9	Wear ring	Resin	
10	Rod end nut	Carbon steel	Zinc chromated
11	Cushion ring A	Aluminum alloy	
12	Cushion ring B	Aluminum alloy	
13	Seal retainer	Rolled steel	Zinc chromated
14	Cushion valve	Carbon steel	Electroless nickel plating
		ø40 or smaller	
		ø50 or larger	Steel wire
			Zinc chromated

Note) For cylinders with auto switches, the magnet is installed in the piston.

* The material for ø20, ø25 cylinders with auto switches is made of stainless steel.

No.	Description	Material	Note
15	Cushion seal A	Urethane	ø32 or larger is common.
16	Cushion seal B	Urethane	
17	Head cover	Aluminum alloy	Hard anodized
18	Cylinder tube	Aluminum alloy	Hard anodized
19	Rod seal	NBR	
20	Piston seal	NBR	
21	Tube gasket	NBR	
22	Valve seal	NBR	

Replacement Parts: Seal Kit


Bore size (mm)	Kit no.	Contents
20	CG1N20Z-PS	Set of the nos. 19, 20, 21
25	CG1N25Z-PS	
32	CG1N32Z-PS	
40	CG1N40Z-PS	

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.


Note) Refer to the Specific Product Precautions on page 362-1 for Disassembly/Replacement. Order with the kit number according to the bore size.

* The seal kit includes a grease pack (10 g).
Order with the following part number when only the grease pack is needed. Grease pack part number: GR-S-010 (10 g)


Basic: CG1BN

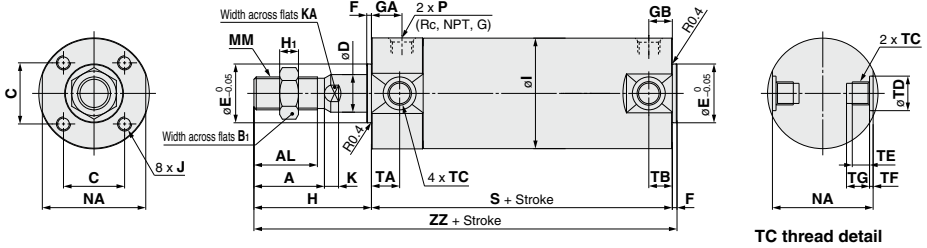

With air cushion

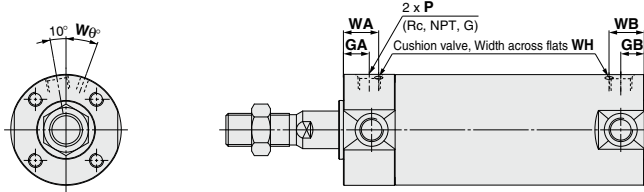

Basic (Without trunnion mounting female thread): CG1ZN

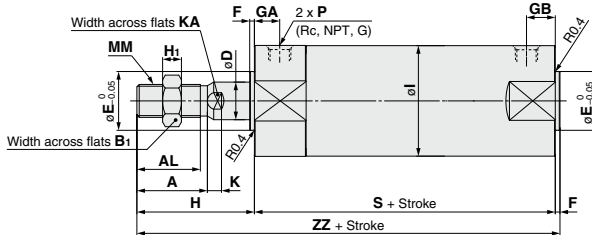

Bore size	Stroke range		Rc, NPT port			G port			A	AL	B ₁	C	D	E	F	H	H _i	I	J	K	KA	MM
			GA	GB	P	GA	GB	P														
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	13	14	8	12	2	35	5	26	M4 x 0.7 depth 7	5	6	M8 x 1.25
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	17	16.5	10	14	2	40	6	31	M5 x 0.8 depth 7.5	5.5	8	M10 x 1.25
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	17	20	12	18	2	40	6	38	M5 x 0.8 depth 8	5.5	10	M10 x 1.25
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (10)	1/8	30	27	19	26	16	25	2	50	8	47	M6 x 1 depth 12	6	14	M14 x 1.5
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	32	20	30	2	58	11	58	M8 x 1.25 depth 16	7	18	M18 x 1.5
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	38	20	32	2	58	11	72	M10 x 1.5 depth 16	7	18	M18 x 1.5
80	Up to 300	301 to 1500	20	16 (20)	3/8	17.5	16 (17.5)	3/8	40	37	32	50	25	40	3	71	13	89	M10 x 1.5 depth 22	10	22	M22 x 1.5
100	Up to 300	301 to 1500	20	16 (20)	1/2	17.5	16 (17.5)	1/2	40	37	41	60	30	50	3	71	16	110	M12 x 1.75 depth 22	10	26	M26 x 1.5



Bore size	(mm)					With Air Cushion					(mm)					TC Thread					(mm)				
	NA	S	TA	TB	ZZ	Bore size	GA	GB	P	WA	WB	Wθ	WH	Bore size	TC	TD	TE	TF	TG	Bore size	TC	TD	TE	TF	TG
20	24	69 (77)	11	11	106 (114)	20	12	10 (12)	M5 x 0.8	16	15	(16)	25° 1.5	20	M5 x 0.8	8 ^{0.08} _{0.08}	4	0.5	5.5	20	M5 x 0.8	8 ^{0.08} _{0.08}	4	0.5	5.5
25	29	69 (77)	11	11	111 (119)	25	12.5	10 (12.5)	M5 x 0.8	16	14.5 (16)	25° 1.5		25	M6 x 0.75	10 ^{0.08} _{0.08}	5	1	6.5	25	M6 x 0.75	10 ^{0.08} _{0.08}	5	1	6.5
32	35.5	71 (79)	11	10 (11)	113 (121)	32	12	10 (12)	1/8	16	14	(16)	25° 1.5	32	M8 x 1.0	12 ^{0.08} _{0.08}	5.5	1	7.5	32	M8 x 1.0	12 ^{0.08} _{0.08}	5.5	1	7.5
40	44	78 (87)	12	10 (12)	130 (139)	40	13	10 (13)	1/8	17	15	(17)	20° 1.5	40	M10 x 1.25	14 ^{0.08} _{0.08}	6	1.25	8.5	40	M10 x 1.25	14 ^{0.08} _{0.08}	6	1.25	8.5
50	55	90 (102)	13	12 (13)	150 (162)	50	14	12 (14)	1/4	18	16	(18)	20° 3	50	M12 x 1.25	16 ^{0.08} _{0.08}	7.5	2	10	50	M12 x 1.25	16 ^{0.08} _{0.08}	7.5	2	10
63	69	90 (102)	13	12 (13)	150 (162)	63	14	12 (14)	1/4	18	17	(18)	20° 3	63	M14 x 1.5	18 ^{0.08} _{0.08}	11.5	3	14.5	63	M14 x 1.5	18 ^{0.08} _{0.08}	11.5	3	14.5
80	86	108 (122)	—	—	182 (196)	80	20	16 (20)	3/8	24	20	(24)	20° 4	80	—	—	—	—	—	80	—	—	—	—	—
100	106	108 (122)	—	—	182 (196)	100	20	16 (20)	1/2	24	20	(24)	20° 4	100	—	—	—	—	—	100	—	—	—	—	—

Note () : Denotes the dimensions for long stroke.

* Cylinder sizes ø80 and ø100 do not have trunnion mounting female thread on the width across flats NA.

Basic: CG1BN

With rod boot

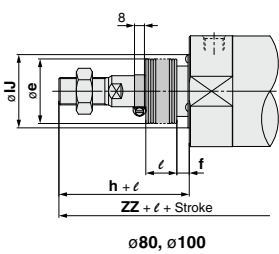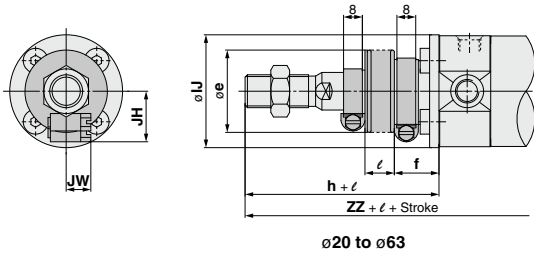


With Rod Boot (mm)

Bore size	e	f	h	lJ	JH (Reference)	JW (Reference)	l	ZZ
20	30	18	55	27	15.5	10.5	1/4 stroke	126 (134)
25	30	19	62	32	16.5	10.5		133 (141)
32	35	19	62	38	18.5	10.5		135 (143)
40	35	19	70	48	21.5	10.5		150 (159)
50	40	19	78	59	24	10.5		170 (182)
63	40	20	78	72	24	10.5		170 (182)
80	52	10	80	59	—	—		191 (205)
100	62	7	80	71	—	—		191 (205)

* The minimum stroke with rod boot is 20 mm.

Female rod end

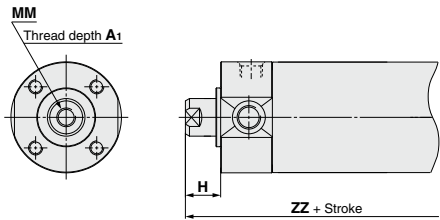


Female Rod End (mm)


Bore size	A1	H	MM	ZZ
20	8	13	M4 x 0.7	84 (92)
25	8	14	M5 x 0.8	85 (93)
32	12	14	M6 x 1	87 (95)
40	13	15	M8 x 1.25	95 (104)
50	18	16	M10 x 1.5	108 (120)
63	18	16	M10 x 1.5	108 (120)
80	21	19	M14 x 1.5	130 (144)
100	25	22	M16 x 1.5	133 (147)

* When female thread is used, use a washer etc. to prevent the contact part at the rod end from being deformed depending on the material of the workpiece.


Axial Foot: CG1LN

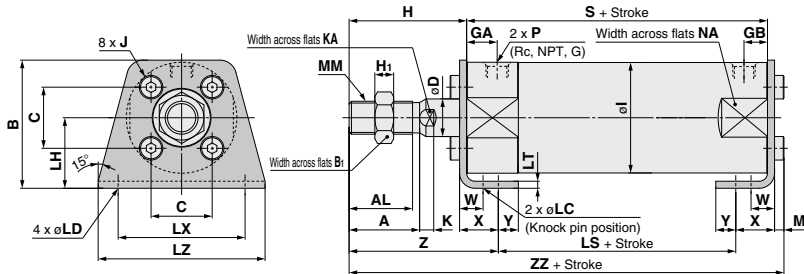

With air cushion

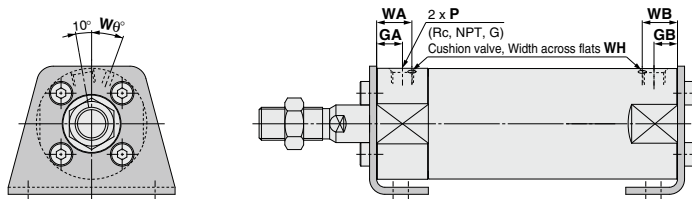

With rod boot

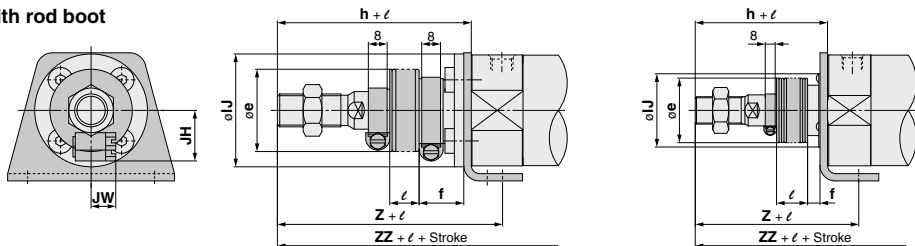

ø80, ø100

Bore size	Stroke range		Rc, NPT port			G port			A	AL	B	B ₁	C	D	H	H ₁	I	J	K	KA	LC	LD	LH	LS	LT	LX	LZ	M	MM
	Standard	Long stroke	GA	GB	P	GA	GB	P																					
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	34	13	14	8	35	5	26	M4 x 0.7	5	6	4	6	20	45 (53)	3	32	44	3	M8 x 1.25
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	38.5	17	16.5	10	40	6	31	M5 x 0.8	5.5	8	4	6	22	45 (53)	3	36	49	3.5	M10 x 1.25
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	45	17	20	12	40	6	38	M5 x 0.8	5.5	10	4	7	25	45 (53)	3	44	58	3.5	M10 x 1.25
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (10)	1/8	30	27	54.5	19	26	16	50	8	47	M6 x 1	6	14	4	7	30	51 (60)	3	54	71	4	M14 x 1.5
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	70.5	27	32	20	58	11	58	M8 x 1.25	7	18	5	10	40	55 (67)	4.5	66	86	5	M18 x 1.5
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	82.5	27	38	20	58	11	72	M10 x 1.5	7	18	5	12	45	55 (67)	4.5	82	106	5	M18 x 1.5
80	Up to 300	301 to 1500	20	16 (20)	3/8	17.5	16 (17.5)	3/8	40	37	101	32	50	25	71	13	89	M10 x 1.5	10	22	6	11	55	60 (74)	4.5	100	125	5	M22 x 1.5
100	Up to 300	301 to 1500	20	16 (20)	1/2	17.5	16 (17.5)	1/2	40	37	121	41	60	30	71	16	110	M12 x 1.75	10	26	6	14	65	60 (74)	6	120	150	7	M26 x 1.5

Bore size	Stroke range		Rc, NPT port			G port			A	AL	B	B ₁	C	D	H	H ₁	I	J	K	KA	LC	LD	LH	LS	LT	LX	LZ	M	MM
	Standard	Long stroke	GA	GB	P	GA	GB	P																					
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	34	13	14	8	35	5	26	M4 x 0.7	5	6	4	6	20	45 (53)	3	32	44	3	M8 x 1.25
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	38.5	17	16.5	10	40	6	31	M5 x 0.8	5.5	8	4	6	22	45 (53)	3	36	49	3.5	M10 x 1.25
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	45	17	20	12	40	6	38	M5 x 0.8	5.5	10	4	7	25	45 (53)	3	44	58	3.5	M10 x 1.25
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (10)	1/8	30	27	54.5	19	26	16	50	8	47	M6 x 1	6	14	4	7	30	51 (60)	3	54	71	4	M14 x 1.5
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	70.5	27	32	20	58	11	58	M8 x 1.25	7	18	5	10	40	55 (67)	4.5	66	86	5	M18 x 1.5
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	82.5	27	38	20	58	11	72	M10 x 1.5	7	18	5	12	45	55 (67)	4.5	82	106	5	M18 x 1.5
80	Up to 300	301 to 1500	20	16 (20)	3/8	17.5	16 (17.5)	3/8	40	37	101	32	50	25	71	13	89	M10 x 1.5	10	22	6	11	55	60 (74)	4.5	100	125	5	M22 x 1.5
100	Up to 300	301 to 1500	20	16 (20)	1/2	17.5	16 (17.5)	1/2	40	37	121	41	60	30	71	16	110	M12 x 1.75	10	26	6	14	65	60 (74)	6	120	150	7	M26 x 1.5

* For female rod end, since the wrench flap (K and KA portions) will be inside of the bracket when the piston rod is retracted at the stroke end, extend the piston rod to tighten the nut using a tool, and mount a workpiece on the rod end.
* Refer to the basic type for the female rod end.
Note () : Denotes the dimensions for long stroke.


* The minimum stroke with rod boot is 20 mm.

CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2


D-□
-X□
Technical Data

CG1 Series


Rod Flange: CG1FN

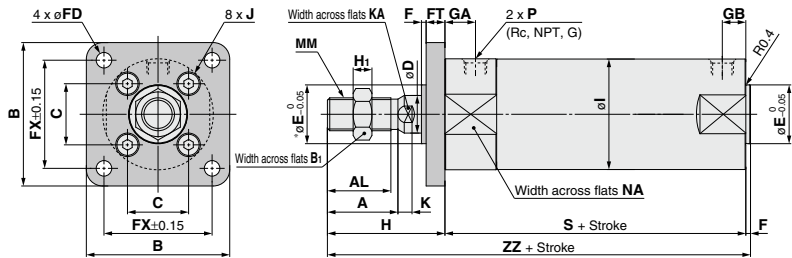

With air cushion

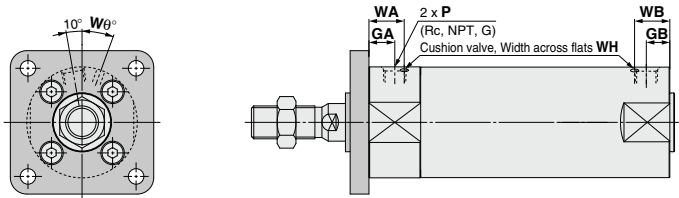

With rod boot

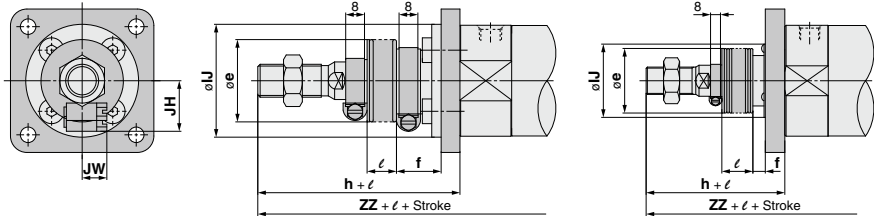

Bore size	Stroke range		Rc, NPT port			G port			A	AL	B	B _i	C	D	E	F	FD	FT	FX	H	H _i	I	J	K
	Standard	Long stroke	GA	GB	P	GA	GB	P																
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	40	13	14	8	12	2	5.5	6	28	35	5	26	M4 x 0.7	5
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	44	17	16.5	10	14	2	5.5	7	32	40	6	31	M5 x 0.8	5.5
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	53	17	20	12	18	2	6.6	7	38	40	6	38	M5 x 0.8	5.5
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (10)	1/8	30	27	61	19	26	16	25	2	6.6	8	46	50	8	47	M6 x 1	6
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	76	27	32	20	30	3	9	9	58	58	11	58	M8 x 1.25	7
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	92	27	38	20	32	2	11	9	70	58	11	72	M10 x 1.5	7
80	Up to 300	301 to 1500	20	16 (20)	3/8	17.5	16 (17.5)	3/8	40	37	104	32	50	25	40	3	11	11	82	71	13	89	M10 x 1.5	10
100	Up to 300	301 to 1500	20	16 (20)	1/2	17.5	16 (17.5)	1/2	40	37	128	41	60	30	50	3	14	14	100	71	16	110	M12 x 1.75	10

(mm)						With Air Cushion								(mm)						With Rod Boot								(mm)	
Bore size	KA	MM	NA	S	ZZ	Bore size	Rc, NPT port			WA	WB	W ₀	WH	Bore size	e	f	h	IJ	JH (Reference)	JW (Reference)	ℓ	ZZ							
							GA	GB	P																				
20	6	M8 x 1.25	24	69 (77)	106 (114)	20	12	10 (12)	M5 x 0.8	16	15 (16)	25°	1.5	20	30	18	55	27	15.5	10.5	1/4 stroke	126 (134)							
25	8	M10 x 1.25	29	69 (77)	111 (119)	25	12.5	10 (12.5)	M5 x 0.8	16	14.5 (16)	25°	1.5	25	30	19	62	32	16.5	10.5		133 (141)							
32	10	M10 x 1.25	35.5	71 (79)	113 (121)	32	12	10 (12)	1/8	16	14 (16)	25°	1.5	32	35	19	62	38	18.5	10.5		135 (143)							
40	14	M14 x 1.5	44	78 (87)	130 (139)	40	13	10 (13)	1/8	17	15 (17)	20°	1.5	40	35	19	70	48	21.5	10.5		150 (159)							
50	18	M18 x 1.5	55	90 (102)	150 (162)	50	14	12 (14)	1/4	18	16 (18)	20°	3	50	40	19	78	59	24	10.5		170 (182)							
63	18	M18 x 1.5	69	90 (102)	150 (162)	63	14	12 (14)	1/4	18	17 (18)	20°	3	63	40	20	78	72	24	10.5	170 (182)								
80	22	M22 x 1.5	86	108 (122)	182 (196)	80	20	16 (20)	3/8	24	20 (24)	20°	4	80	52	10	80	59	—	—	191 (205)								
100	26	M26 x 1.5	106	108 (122)	182 (196)	100	20	16 (20)	1/2	24	20 (24)	20°	4	100	62	7	80	71	—	—	191 (205)								


* For female rod end, since the wrench flap (K and KA portions) will be inside of the bracket when the piston rod is retracted at the stroke end, extend the piston rod to tighten the nut using a tool, and mount a workpiece on the rod end.

* Refer to the basic type for the female end.

Note () : Denotes the dimensions for long stroke.




Head Flange: CG1GN

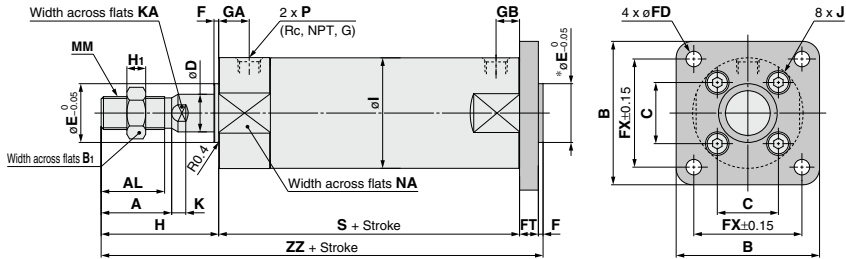


* End boss is machined on the flange for øE.

With air cushion

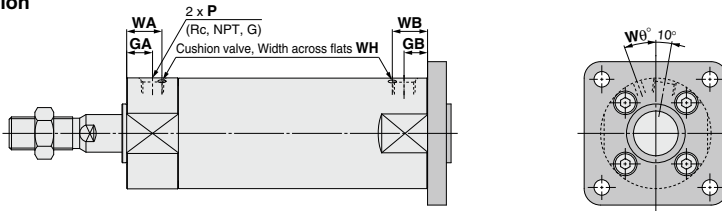

With rod boot

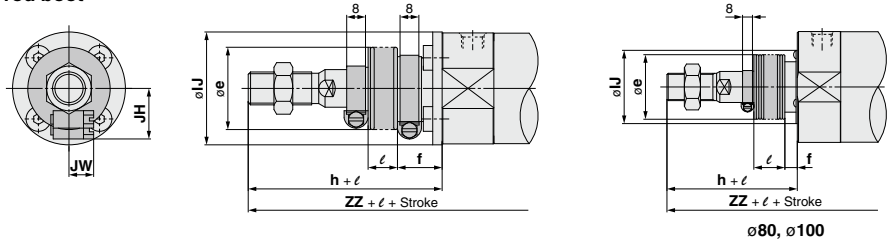


Bore size	Stroke range		Rc, NPT port			G port			A	AL	B	B ₁	C	D	E	F	FD	FT	FX	H	H ₁	I	J	K
	Standard	Long stroke	GA	GB	P	GA	GB	P																
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	40	13	14	8	12	2	5.5	6	28	35	5	26	M4 x 0.7	5
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	44	17	16.5	10	14	2	5.5	7	32	40	6	31	M5 x 0.8	5.5
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	53	17	20	12	18	2	6.6	7	38	40	6	38	M5 x 0.8	5.5
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (10)	1/8	30	27	61	19	26	16	25	2	6.6	8	46	50	8	47	M6 x 1	6
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	76	27	32	20	30	2	9	9	58	58	11	58	M8 x 1.25	7
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	92	27	38	20	32	2	11	9	70	58	11	72	M10 x 1.5	7
80	Up to 300	301 to 1500	20	16 (20)	3/8	17.5	16 (17.5)	3/8	40	37	104	32	50	25	40	3	11	11	82	71	13	89	M10 x 1.5	10
100	Up to 300	301 to 1500	20	16 (20)	1/2	17.5	16 (17.5)	1/2	40	37	128	41	60	30	50	3	14	14	100	71	16	110	M12 x 1.75	10

(mm)						With Air Cushion										(mm)										With Rod Boot										(mm)	
Bore size	KA	MM	NA	S	ZZ	Bore size	Rc, NPT port			WA	WB	Wθ	WH	Bore size	e	f	h	IJ	JH (Reference)	JW (Reference)	ℓ	ZZ															
							GA	GB	P																												
20	6	M8 x 1.25	24	69 (77)	112 (120)	20	12	10 (12)	M5 x 0.8	16	15 (16)	25°	1.5	20	30	18	55	27	15.5	10.5	1/4 stroke	132 (140)															
25	8	M10 x 1.25	29	69 (77)	118 (126)	25	12.5	10 (12.5)	M5 x 0.8	16	14.5 (16)	25°	1.5	25	30	18	62	32	16.5	10.5		140 (148)															
32	10	M10 x 1.25	35.5	71 (79)	120 (128)	32	12	10 (12)	1/8	16	14 (16)	25°	1.5	32	35	19	62	38	18.5	10.5		142 (150)															
40	14	M14 x 1.5	44	78 (87)	138 (147)	40	13	10 (13)	1/8	17	15 (17)	20°	1.5	40	35	19	70	48	21.5	10.5		158 (167)															
50	18	M18 x 1.5	55	90 (102)	159 (171)	50	14	12 (14)	1/4	18	16 (18)	20°	3	50	40	19	78	59	24	10.5		179 (191)															
63	18	M18 x 1.5	69	90 (102)	159 (171)	63	14	12 (14)	1/4	18	17 (18)	20°	3	63	40	20	78	72	24	10.5		179 (191)															
80	22	M22 x 1.5	86	108 (122)	193 (207)	80	20	16 (20)	3/8	24	20 (24)	20°	4	80	52	10	80	59	—	—	202 (216)																
100	26	M26 x 1.5	106	108 (122)	196 (210)	100	20	16 (20)	1/2	24	20 (24)	20°	4	100	62	7	80	71	—	—	205 (219)																

* Refer to the basic type for the female rod end.
Note () : Denotes the dimensions for long stroke.


* The minimum stroke with rod boot is 20 mm.

Rod Trunnion: CG1UN

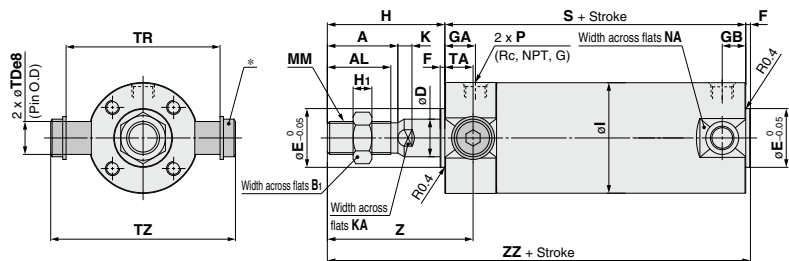


* Constructed of a trunnion pin, flat washer and hexagon socket head cap bolt.

With air cushion

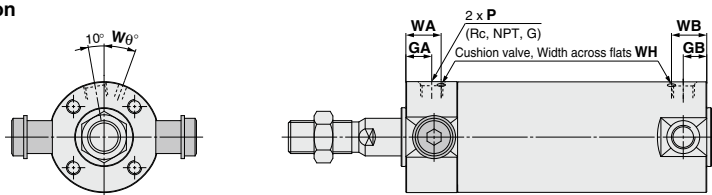

With rod boot

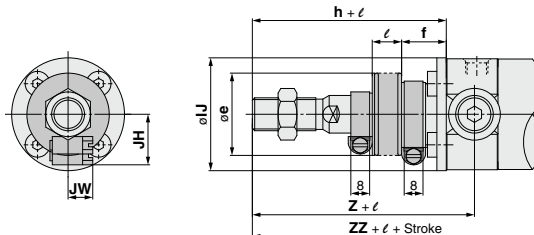


Bore size		Stroke range		Rc, NPT port			G port			(mm)														
		Standard	Long stroke	GA	GB	P	GA	GB	P	A	AL	B ₁	D	E	F	H	H ₁	I	K	KA	MM	NA	S	
20	Up to 300	201 to 1500	12	10 (12)	1/8	12	10 (12)	1/8	M5 x 0.8	18	15.5	13	8	12	2	35	5	26	5	6	M8 x 1.25	24	69 (77)	
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	17	10	14	2	40	6	31	5.5	8	M10 x 1.25	29	69 (77)		
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	17	12	18	2	40	6	38	5.5	10	M10 x 1.25	35.5	71 (79)		
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (13)	1/8	30	27	19	16	25	2	50	8	47	6	14	M14 x 1.5	44	78 (87)		
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	20	30	2	58	11	58	7	18	M18 x 1.5	55	90 (102)		
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	20	32	2	58	11	72	7	18	M18 x 1.5	65	90 (102)		

(mm)							With Air Cushion										(mm)							With Rod Boot										(mm)			
Bore size	TA	TD#8	TR	Z	Z	ZZ	Bore size	Rc, NPT port			WA	WB	W0	WH	Bore size	e	f	h	IJ	JH	JW	1/4 stroke	Z	ZZ													
								GA	GB	P																											
20	11	8.025 0.247	39	47.6	46	106 (114)	20	12	10 (12)	M5 x 0.8	16	15 (16)	25°	1.5	20	30	18	55	27	15.5	10.5		66	126 (134)													
25	11	10.025 0.254	43	53	51	111 (119)	25	12.5	10 (12.5)	M5 x 0.8	16	14.5 (16)	25°	1.5	25	30	19	62	32	16.5	10.5		73	133 (141)													
32	11	12.032 0.262	54.5	67.7	51	113 (121)	32	12	10 (12)	1/8	16	14 (16)	25°	1.5	32	35	19	62	38	18.5	10.5		73	135 (143)													
40	12	14.032 0.270	65.5	78.7	62	130 (139)	40	13	10 (13)	1/8	17	15 (17)	20°	1.5	40	35	19	70	48	21.5	10.5		82	150 (159)													
50	13	16.032 0.276	80	98.6	71	150 (162)	50	14	12 (14)	1/4	18	16 (18)	20°	3	50	40	19	78	59	24	10.5		91	170 (182)													
63	13	18.032 0.281	98	119.2	71	150 (162)	63	14	12 (14)	1/4	18	17 (18)	20°	3	63	40	20	78	72	24	10.5		91	170 (182)													

* Refer to the basic type for the female rod end.
Note) (): Denotes the dimensions for long stroke.


* The minimum stroke with rod boot is 20 mm.

Head Trunnion: CG1TN

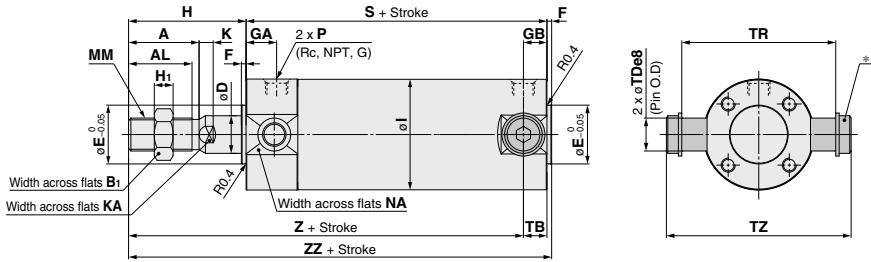


* Constructed of a trunnion pin, flat washer and hexagon socket head cap bolt.

With air cushion

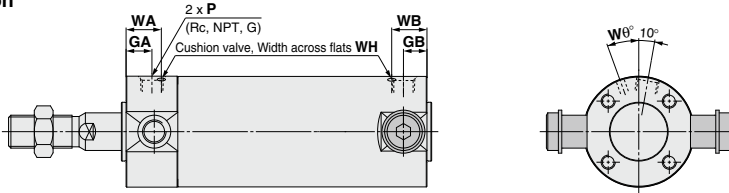

With rod boot

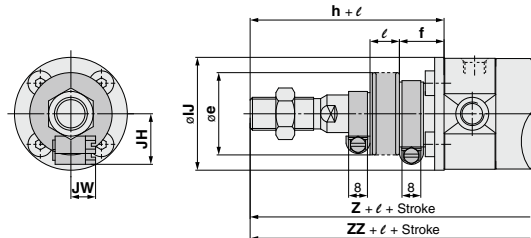

Bore size	Stroke range		Rc, NPT port			G port			A	AL	B ₁	D	E	F	H	H ₁	I	K	KA	MM	NA	S
	Standard	Long stroke	GA	GB	P	GA	GB	P														
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	13	8	12	2	35	5	26	5	6	M8 x 1.25	24	69 (77)
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	17	10	14	2	40	6	31	5.5	8	M10 x 1.25	29	69 (77)
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	17	12	18	2	40	6	38	5.5	10	M10 x 1.25	35.5	71 (79)
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (10)	1/8	30	27	19	16	25	2	50	8	47	6	14	M14 x 1.5	44	78 (87)
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	20	30	2	58	11	58	7	18	M18 x 1.5	55	90 (102)
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	20	32	2	58	11	72	7	18	M18 x 1.5	69	90 (102)

Bore size	Stroke range		Rc, NPT port			G port			A	AL	B ₁	D	E	F	H	H ₁	I	K	KA	MM	NA	S
	Standard	Long stroke	GA	GB	P	GA	GB	P														
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	13	8	12	2	35	5	26	5	6	M8 x 1.25	24	69 (77)
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	17	10	14	2	40	6	31	5.5	8	M10 x 1.25	29	69 (77)
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	17	12	18	2	40	6	38	5.5	10	M10 x 1.25	35.5	71 (79)
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (10)	1/8	30	27	19	16	25	2	50	8	47	6	14	M14 x 1.5	44	78 (87)
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	20	30	2	58	11	58	7	18	M18 x 1.5	55	90 (102)
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	20	32	2	58	11	72	7	18	M18 x 1.5	69	90 (102)

* Refer to the basic type for the female rod end.
Note () : Denotes the dimensions for long stroke.


* The minimum stroke with rod boot is 20 mm.

CG1
CG2
CG3
JMB
MB
MB1
CA2
CS1
CS2


D-□
-X□
Technical Data

CG1 Series


Clevis: CG1DN (ø20 to ø63)

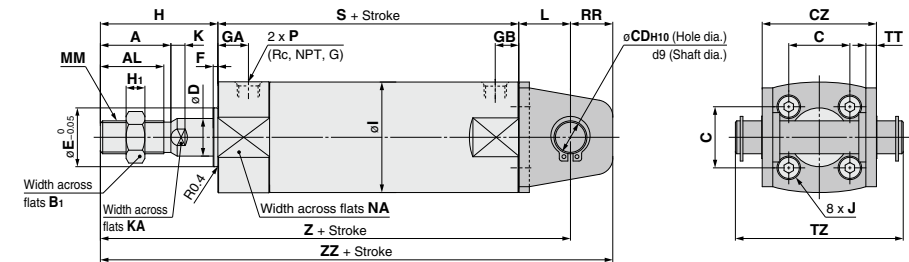

With air cushion

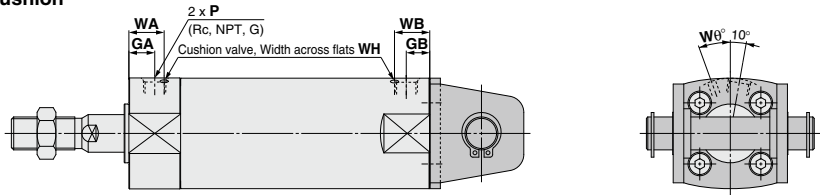

With rod boot

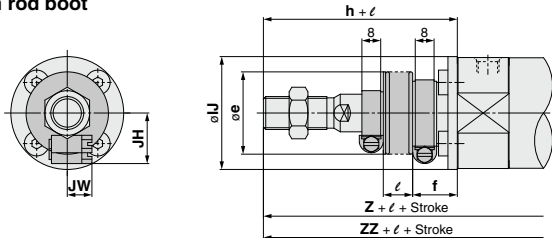


(mm)																								
Bore size	Stroke range		Rc, NPT port			G port			A	AL	B ₁	C	CD	CZ	D	E	F	H	H ₁	I				
	Standard	Long stroke	GA	GB	P	GA	GB	P																
20	Up to 200	201 to 1500	12	10 (12)	1/8	12	10 (12)	M5 x 0.8	18	15.5	13	14	8	29	8	12	2	35	5	26				
25	Up to 300	301 to 1500	12	10 (12)	1/8	12.5	10 (12.5)	M5 x 0.8	22	19.5	17	16.5	10	33	10	14	2	40	6	31				
32	Up to 300	301 to 1500	12	10 (12)	1/8	10.5	10 (10.5)	1/8	22	19.5	17	20	12	40	12	18	2	40	6	38				
40	Up to 300	301 to 1500	13	10 (13)	1/8	13	10 (13)	1/8	30	27	19	26	14	49	16	25	2	50	8	47				
50	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	32	16	60	20	30	2	58	11	58				
63	Up to 300	301 to 1500	14	12 (14)	1/4	14	12 (14)	1/4	35	32	27	38	18	74	20	32	2	58	11	72				
(mm)																								
Bore size	With Air Cushion										(mm)				With Rod Boot						(mm)			
	RR	S	TT	TZ	Z	ZZ	Applicable pin part no.	Bore size	Rc, NPT port	WA	WB	Wθ	WH	Bore size	e	f	h	IJ	JH	JW	ℓ	Z	ZZ	
20	11	69 (77)	3.2	43.4	118 (126)	129 (137)	CD-G02	20	12	10 (12)	M5 x 0.8	16	15 (16)	25°	1.5	20	30	18	55	27	15.5	10.5	138 (146)	149 (157)
25	13	69 (77)	3.2	48	125 (133)	138 (146)	CD-G25	25	12.5	10 (12.5)	M5 x 0.8	16	14.5 (16)	25°	1.5	25	30	19	62	32	16.5	10.5	147 (155)	160 (168)
32	15	71 (79)	4.5	59.4	131 (139)	146 (154)	CD-G03	32	12	10 (12)	1/8	16	14 (16)	25°	1.5	32	35	19	62	38	18.5	10.5	153 (161)	168 (176)
40	18	78 (87)	4.5	71.4	150 (159)	168 (177)	CD-G04	40	13	10 (13)	1/8	17	15 (17)	20°	1.5	40	35	19	70	48	21.5	10.5	170 (179)	188 (197)
50	20	90 (102)	6	86	173 (185)	193 (205)	CD-G05	50	14	12 (14)	1/4	18	16 (18)	20°	3	50	40	19	78	59	24	10.5	193 (205)	213 (225)
63	22	90 (102)	8	105.4	178 (190)	200 (212)	CD-G06	63	14	12 (14)	1/4	18	17 (18)	20°	3	63	40	20	78	72	24	10.5	198 (210)	220 (232)


* Refer to the basic type for the female rod end.
Note) () : Denotes the dimensions for long stroke.

* The minimum stroke with rod boot is 20 mm.


Clevis: CG1DN (ø80, ø100)

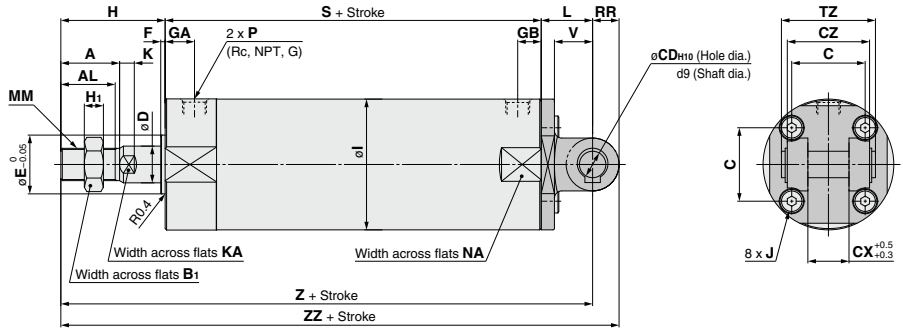

With air cushion

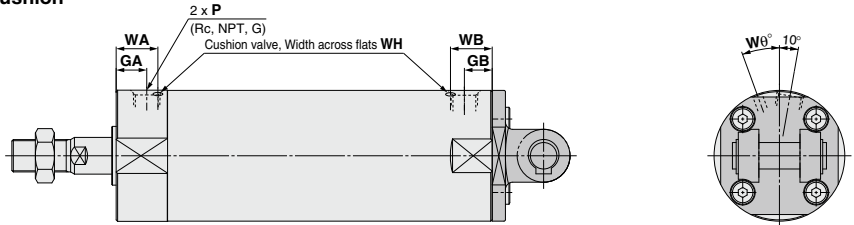

With rod boot

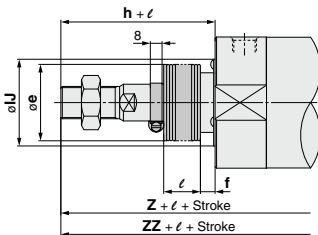

(mm)																											
Bore size	Stroke range		Rc, NPT port			G port			A	AL	B ₁	C	CD	CX	CZ	D	E	F	H	H ₁	I	J	K	KA	L	MM	NA
	Standard	Long stroke	GA	GB	P	GA	GB	P																			
80	Up to 300	301 to 1500	20	16 (20)	3/8	17.5	16 (17.5)	3/8	40	37	32	50	18	28	56	25	40	3	71	13	89	M10 x 1.5	10	22	35	M22 x 1.5	86
100	Up to 300	301 to 1500	20	16 (20)	1/2	17.5	16 (17.5)	1/2	40	37	41	60	22	32	64	30	50	3	71	16	110	M12 x 1.75	10	26	43	M26 x 1.5	106
(mm)																											
With Air Cushion														(mm)													
Bore size	RR	S	TZ	V	Z	ZZ	Applicable pin part no.					Bore size	Rc, NPT port			WA	WB	W _θ	WH	Bore size	e	f	h	IJ	ℓ	Z	ZZ
													GA	GB	P												
80	18	108 (122)	64	26	214 (228)	232 (246)	IY-G08					80	20	16 (20)	3/8	24	20 (24)	20°	4	80	52	10	80	59	1/4	223 (237)	241 (255)
100	22	108 (122)	72	32	222 (236)	244 (258)	IY-G10					100	20	16 (20)	1/2	24	20 (24)	20°	4	100	62	7	80	71	stroke	231 (245)	253 (267)

* Refer to the basic type for the female rod end.
Note) (): Denotes the dimensions for long stroke.


* The minimum stroke with rod boot is 20 mm.

CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

D-□
-X□
Technical Data

With Pivot Bracket ([]: Denotes the dimensions for long stroke.)


Rod Trunnion (U) with Pivot Bracket

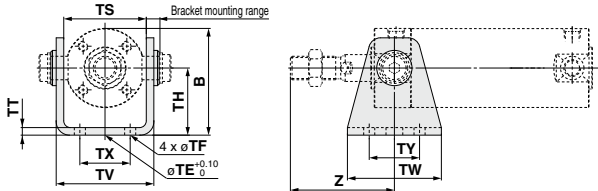


Male Thread (mm)											
Bore size	B	TE	TF	TH	TS	TT	TV	TW	TX	TY	Z
20	38	10	5.5	25	28	3.2	35.8	42	16	28	46
25	45.5	10	5.5	30	33	3.2	39.8	42	20	28	51
32	54	10	6.6	35	40	4.5	49.4	48	22	28	51
40	63.5	10	6.6	40	49	4.5	58.4	56	30	30	62
50	79	20	9	50	60	6	72.4	64	36	36	71
63	96	20	11	60	74	8	90.4	74	46	46	71

Female Thread (mm)	
Bore size	Z
20	24
25	25
32	25
40	27
50	29
63	29

Head Trunnion (T) with Pivot Bracket

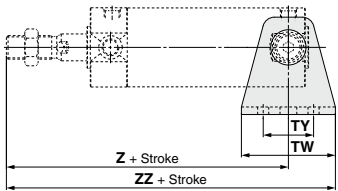


Male Thread (mm)												
Bore size	B	TE	TF	TH	TS	TT	TV	TW	TX	TY	Z	ZZ
20	38	10	5.5	25	28	3.2	35.8	42	16	28	93 (101)	114 (122)
25	45.5	10	5.5	30	33	3.2	39.8	42	20	28	98 (106)	119 (127)
32	54	10	6.6	35	40	4.5	49.4	48	22	28	101 (108)	125 (132)
40	63.5	10	6.6	40	49	4.5	58.4	56	30	30	118 (125)	146 (153)
50	79	20	9	50	60	6	72.4	64	36	36	136 (147)	168 (179)
63	96	20	11	60	74	8	90.4	74	46	46	136 (147)	173 (184)




Female Thread (mm)		
Bore size	Z	ZZ
20	71 (79)	92 (100)
25	72 (80)	93 (101)
32	75 (82)	99 (106)
40	83 (90)	111 (118)
50	94 (105)	126 (137)
63	94 (105)	131 (142)

Clevis (D) with Pivot Bracket
ø20 to ø63

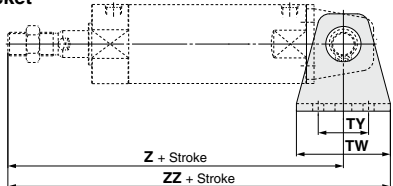


Male Thread											
Bore size	(mm)									(mm)	
	B	TE	TF	TH	TT	TV	TW	TX	TY	Z	ZZ
20	38	10	5.5	25	3.2	35.8	42	16	28	118 (126)	139 (147)
25	45.5	10	5.5	30	3.2	39.8	42	20	28	125 (133)	146 (154)
32	54	10	6.6	35	4.5	49.4	48	22	28	131 (139)	155 (163)
40	63.5	10	6.6	40	4.5	58.4	56	30	30	150 (159)	178 (187)
50	79	20	9	50	6	72.4	64	36	36	173 (185)	205 (217)
63	96	20	11	60	8	90.4	74	46	46	178 (190)	215 (227)




Female Thread (mm)		
Bore size	Z	ZZ
20	96 (104)	117 (125)
25	99 (107)	120 (128)
32	105 (113)	129 (137)
40	115 (124)	143 (152)
50	131 (143)	163 (175)
63	136 (148)	173 (185)

Clevis (D) with Pivot Bracket
ø80, ø100

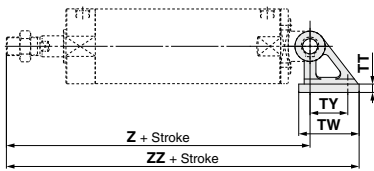

Male Thread										(mm)	
Bore size	B	TF	TH	TT	TV	TW	TX	TY	Z	ZZ	
80	99.5	11	55	11	110	72	85	45	214 (228)	272.5 (286.5)	
100	120	13.5	65	12	130	93	100	60	222 (236)	298.5 (312.5)	




Female Thread (mm)		
Bore size	Z	ZZ
80	162 (176)	220.5 (234.5)
100	173 (187)	249.5 (263.5)

Dimensions of Accessories

Single Knuckle Joint


I-G02, G03

Material: Carbon steel




I-G04, G05, G08, G10

Material: Cast iron



Part no.	Applicable bore size (mm)	A	A1	E1	L1	MM	R1	U1	NDH10	NX
I-G02	20	34	8.5	16	25	M8 x 1.25	10.3	11.5	8 ^{+0.058} _{-0.042}	8 ^{+0.2} _{-0.2}
I-G03	25, 32	41	10.5	20	30	M10 x 1.25	12.8	14	10 ^{+0.058} _{-0.042}	10 ^{+0.2} _{-0.2}
I-G04	40	42	14	22	30	M14 x 1.5	12	14	10 ^{+0.058} _{-0.042}	18 ^{+0.2} _{-0.2}
I-G05	50, 63	56	18	28	40	M18 x 1.5	16	20	14 ^{+0.070} _{-0.050}	22 ^{+0.2} _{-0.2}
I-G08	80	71	21	38	50	M22 x 1.5	21	27	18 ^{+0.070} _{-0.050}	28 ^{+0.2} _{-0.2}
I-G10	100	79	21	44	55	M26 x 1.5	24	31	22 ^{+0.084} _{-0.064}	32 ^{+0.2} _{-0.2}

Knuckle Pin




Material: Carbon steel (mm)

Part no.	Applicable bore size (mm)	Dd9	L1	d	L2	m	t	Included retaining ring
IY-G02	20	8 ^{+0.040} _{-0.076}	21	7.6	16.2	1.5	0.9	Type C8 for axis
IY-G03	25, 32	10 ^{+0.040} _{-0.076}	25.6	9.6	20.2	1.55	1.15	Type C10 for axis
IY-G04	40	10 ^{+0.040} _{-0.093}	41.6	9.6	36.2	1.55	1.15	Type C10 for axis
IY-G05	50, 63	14 ^{+0.050} _{-0.093}	50.6	13.4	44.2	2.05	1.15	Type C14 for axis
IY-G08	80	18 ^{+0.050} _{-0.093}	64	17	56.2	2.55	1.35	Type C18 for axis
IY-G10	100	22 ^{+0.058} _{-0.117}	72	21	64.2	2.55	1.35	Type C22 for axis

* Retaining rings are included.

Clevis Pin




Material: Carbon steel (mm)

Part no.	Applicable bore size (mm)	Dd9	L1	d	L2	m	t	Included retaining ring
CD-G02	20	8 ^{+0.040} _{-0.076}	43.4	7.6	38.6	1.5	0.9	Type C8 for axis
CD-G25	25	10 ^{+0.040} _{-0.076}	48	9.6	42.6	1.55	1.15	Type C10 for axis
CD-G03	32	12 ^{+0.050} _{-0.093}	59.4	11.5	54	1.55	1.15	Type C12 for axis
CD-G04	40	14 ^{+0.050} _{-0.093}	71.4	13.4	65	2.05	1.15	Type C14 for axis
CD-G05	50	16 ^{+0.050} _{-0.093}	86	15.2	79.6	2.05	1.15	Type C16 for axis
CD-G06	63	18 ^{+0.050} _{-0.093}	105.4	17	97.8	2.45	1.35	Type C18 for axis

* Retaining rings are included.

* A clevis pin and a knuckle pin are common for the bore size ø80 and ø100.

Rod End Nut




Material: Carbon steel (mm)

Part no.	Applicable bore size (mm)	d	H1	B1	C	D
NT-02	20	M8 x 1.25	5	13	(15)	12.5
NT-03	25, 32	M10 x 1.25	6	17	(19.6)	16.5
NT-G04	40	M14 x 1.5	8	19	(21.9)	18
NT-05	50, 63	M18 x 1.5	11	27	(31.2)	26
NT-08	80	M22 x 1.5	13	32	(37.0)	31
NT-10	100	M26 x 1.5	16	41	(47.3)	39

Double Knuckle Joint


Y-G02, G03

Material: Carbon steel



Y-G04, G05, G08, G10

Material: Cast iron





Part no.	Applicable bore size (mm)	A	A1	E1	L1	MM	R1	U1	ND	NX	NZ	L	Included pin part no.
Y-G02	20	34	8.5	16	25	M8 x 1.25	10.3	11.5	8	8 ^{+0.058} _{-0.042}	16	21	IY-G02
Y-G03	25, 32	41	10.5	20	30	M10 x 1.25	12.8	14	10	10 ^{+0.058} _{-0.042}	20	25.6	IY-G03
Y-G04	40	42	16	22	30	M14 x 1.5	12	14	10	18 ^{+0.058} _{-0.042}	36	41.6	IY-G04
Y-G05	50, 63	56	20	28	40	M18 x 1.5	16	20	14	22 ^{+0.070} _{-0.050}	44	50.6	IY-G05
Y-G08	80	71	23	38	50	M22 x 1.5	21	27	18	28 ^{+0.070} _{-0.050}	56	64	IY-G08
Y-G10	100	79	24	44	55	M26 x 1.5	24	31	22	32 ^{+0.084} _{-0.064}	64	72	IY-G10

* A knuckle pin and retaining rings are included.

Pivot Bracket


ø20 to ø63

Material: Carbon steel



ø80, ø100

Material: Cast iron

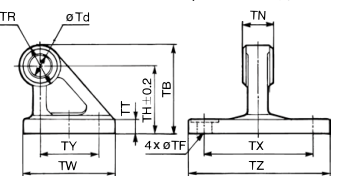

Part no.	Applicable bore size (mm)	TB	Td	TE	TF	TH	TN	TR	TT
CG-020-24A	20	36	8	10	5.5	25	(29.3)	13	3.2
CG-025-24A	25	43	10	10	5.5	30	(33.1)	15	3.2
CG-032-24A	32	50	12	10	6.6	35	(40.4)	17	4.5
CG-040-24A	40	58	14	10	6.6	40	(49.2)	21	4.5
CG-050-24A	50	70	16	20	9	50	(60.4)	24	6
CG-063-24A	63	82	18	20	11	60	(74.6)	26	8
CG-080-24A	80	73	18	—	11	55	28 ^{+0.1} _{-0.1}	36	11
CG-100-24A	100	90	22	—	13.5	65	32 ^{+0.1} _{-0.1}	50	12

Part no.	Applicable bore size (mm)	TU	TV	TW	TX	TY	TZ	Applicable pin O.D.
CG-020-24A	20	(18.1)	(35.8)	42	16	28	38.3	8d ₉ ^{+0.040} _{-0.076}
CG-025-24A	25	(20.7)	(39.8)	42	20	28	42.1	10d ₉ ^{+0.040} _{-0.076}
CG-032-24A	32	(23.6)	(49.4)	48	22	28	53.8	12d ₉ ^{+0.050} _{-0.093}
CG-040-24A	40	(27.3)	(58.4)	56	30	30	64.6	14d ₉ ^{+0.050} _{-0.093}
CG-050-24A	50	(29.7)	(72.4)	64	36	36	79.2	16d ₉ ^{+0.050} _{-0.093}
CG-063-24A	63	(34.3)	(90.4)	74	46	46	97.2	18d ₉ ^{+0.050} _{-0.093}
CG-080-24A	80	—	—	72	85	45	110	18d ₉ ^{+0.050} _{-0.093}
CG-100-24A	100	—	—	93	100	60	130	22d ₉ ^{+0.060} _{-0.117}

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data

Air Cylinder: Standard Type Double Acting, Double Rod

CG1W Series

RoHS

ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

How to Order

CG1W L N 25 - 100 Z -

With auto switch **CDG1W L N 25 - 100 Z - M9BW -**

With auto switch
(Built-in magnet)

Double acting, Double rod type

Mounting

B	Basic
Z*	Basic (without trunnion mounting female thread)
L	Axial foot
F	Flange
U*	Trunnion

* Not available for ø80 and ø100.
* Mounting bracket is shipped together with the product, but not assembled.
* The cylinder for F, L mounting types is Z: Basic (without trunnion mounting female thread).

Type

N	Rubber bumper
A	Air cushion

Bore size

20	20 mm	50	50 mm
25	25 mm	63	63 mm
32	32 mm	80	80 mm
40	40 mm	100	100 mm

Auto switch

Nil	Without auto switch
------------	---------------------

* For applicable auto switches, refer to the table below.

Suffix for cylinder (Rod boot)

Nil	Without rod boot
One side J	Nylon tarpaulin
side K	Heat resistant tarpaulin
Both JJ	Nylon tarpaulin
sides KK	Heat resistant tarpaulin

Note) In the case of w/rod boot, and a foot bracket or rod flange as a bracket, those parts are to be assembled at the time of shipment.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

* For female rod end, no rod boot is provided.

Rod end thread

Nil	Male rod end
F	Female rod end

Cylinder stroke (mm)

Refer to "Standard Strokes" on page 311.

Made to Order

For details, refer to page 311.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDG1WFA32-100Z

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load				
					DC	AC	Applicable bore size			0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)						
							ø20 to ø63	ø80, ø100	Perpendicular									In-line	In-line	
Solid state auto switch	—	Grommet		3-wire (NPN)	5 V, 12 V	—	Perpendicular	In-line	In-line	●	●	○	—	○	IC circuit	Relay, PLC				
				3-wire (PNP)						●	●	○	—	○						
		Connector		2-wire						12 V	●	●	○	—			○	○		
				—						—	●	●	○	—			○			
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V		5 V, 12 V	●	●	○	—	○	○	IC circuit						
				3-wire (PNP)				●	●	○	—	○								
				2-wire				12 V	●	●	○	—	○		○					
				—				—	●	●	○	—	○							
	Water resistant (2-color indicator)	Grommet		3-wire (NPN)	5 V, 12 V		●	●	○	—	○	○	IC circuit							
				3-wire (PNP)			●	●	○	—	○									
				2-wire			12 V	●	●	○	—	○		○						
				—			—	●	●	○	—	○								
	Diagnostic output (2-color indicator)			4-wire (NPN)	5 V, 12 V		—	—	●	●	○	○	○	○	IC circuit					
	Reed auto switch	—	Grommet	Yes	3-wire (Equip. to NPN)		24 V	12 V	Perpendicular	In-line	In-line	●	●	○	—		○	IC circuit	Relay, PLC	
—					—							●	●	○	—	○	○			
Connector				2-wire	100 V							A96V	A96	●	●	○	—	○		IC circuit
				100 V or less	A93V ^{*2}							A93	●	●	○	—	○			
Diagnostic indication (2-color indicator)		Grommet	Yes	2-wire	24 V or less		—	—	—	B54	●	●	○	—	○	—				
							—	—	—	B64	●	●	○	—	○					
							—	—	—	C73C	●	●	○	—	○		IC circuit			
							—	—	—	C80C	●	●	○	—	○					
				—	—		—	B59W	●	●	○	—	○	○	○	○				

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Please consult with SMC regarding water resistant types with the above model numbers.

*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NV
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NVZ
None..... N (Example) H7CN

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 361 for details.


* For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.

* The D-A93□□/M9□□□ auto switches are shipped together, (but not assembled). (However, only the auto switch mounting brackets are assembled before shipment.)




Symbol

Rubber bumper



Air cushion



Made to Order
Click here for details

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat resistant cylinder (-10 to 150°C)*1
-XB7	Cold resistant cylinder (-40 to 70°C)*2
-XC6	Made of stainless steel
-XC13	Auto switch rail mounting
-XC22	Fluororubber seal*1
-XC37	Larger throttle diameter of connection port
-XC85	Grease for food processing equipment

*1 Cylinders with rubber bumper have no bumper.

*2 Only compatible with cylinders with rubber bumper, but has no bumper.

Rod Boot Material

Symbol	Rod boot material	Maximum operating temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

* Maximum ambient temperature for the rod boot itself.

Refer to pages 355 to 361 for cylinders with auto switches.
<ul style="list-style-type: none"> • Auto switch proper mounting position (detection at stroke end) and its mounting height • Minimum stroke for auto switch mounting • Auto switch mounting brackets/Part no. • Operating range • Cylinder mounting bracket, by stroke/ Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Specifications

Bore size (mm)			20	25	32	40	50	63	80	100
Action			Double acting, Double rod							
Lubricant			Not required (Non-lube)							
Fluid			Air							
Proof pressure			1.5 MPa							
Maximum operating pressure			1.0 MPa							
Minimum operating pressure			0.08 MPa							
Ambient and fluid temperature			Without auto switch: -10°C to 70°C With auto switch : -10°C to 60°C (No freezing)							
Piston speed			50 to 1000 mm/s						50 to 700 mm/s	
Stroke length tolerance			Up to 1000 st ^{+1.4} ₋₀ mm, Up to 1500 st ^{+1.8} ₋₀ mm							
Cushion			Rubber bumper, Air cushion							
Mounting**			Basic, Basic (without trunnion mounting female thread), Axial foot, Flange, Trunnion							
Allowable kinetic energy (J)	Rubber bumper	Male rod end	0.28	0.41	0.66	1.20	2.00	3.40	5.90	9.90
		Female rod end	0.11	0.18	0.29	0.52	0.91	1.54	2.71	4.54
	Air cushion	Male rod end	R: 0.35 H: 0.42	R: 0.56 H: 0.65	0.91	1.80	3.40	4.90	11.80	16.70
		Female rod end	0.11	0.18	0.29	0.52	0.91	1.54	2.71	4.54

* R: Rod side, H: Head side

** Rod trunnion type is not available for ø80 and ø100.

Foot and flange types of cylinder sizes from ø20 to ø63 do not have trunnion mounting female thread. Operate the cylinder within the allowable kinetic energy.

Accessories/Refer to page 309 for part numbers and dimensions.

	Mounting	Basic	Axial foot	Rod flange	Rod trunnion
Standard	Rod end nut	●	●	●	●
	Single knuckle joint	●	●	●	●
	Double knuckle joint** (with pin)	●	●	●	●
	Pivot bracket*	—	—	—	●*
	Rod boot	●	●	●	●

* Not available for ø80 and ø100.

** A double knuckle joint pin and retaining rings are shipped together.

Standard Strokes

Bore size (mm)	Standard stroke (mm) ^{Note 1)}	Maximum manufacturable stroke (mm) ^{Note 2)}
20	25, 50, 75, 100, 125, 150, 200	201 to 1500
25	25, 50, 75, 100, 125, 150, 200, 250, 300	301 to 1500
32		
40		
50, 63		
80		
100		

Note 1) Intermediate strokes not listed above are produced upon receipt of order. Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Note 2) The maximum manufacturable stroke shows the long stroke.

Note 3) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data

CG1W Series

Weights

(kg)									
Bore size (mm)		20	25	32	40	50	63	80	100
Basic weight	Basic	0.13	0.22	0.33	0.55	1.02	1.37	2.64	4.09
	Axial foot	0.24	0.35	0.49	0.77	1.50	2.09	3.60	5.84
	Flange	0.21	0.32	0.47	0.75	1.36	1.87	3.35	5.44
	Trunnion	0.14	0.24	0.36	0.60	1.16	1.51	—	—
Pivot bracket		0.08	0.09	0.17	0.25	0.44	0.80	—	—
Single knuckle joint		0.05	0.09	0.09	0.10	0.22	0.22	0.39	0.57
Double knuckle joint (with pin)		0.05	0.09	0.09	0.13	0.26	0.26	0.64	1.31
Additional weight per 50 mm of stroke		0.07	0.10	0.13	0.23	0.34	0.38	0.54	0.77
Additional weight with air cushion		0	0.01	0.04	0	0.01	0.04	0	0.04
Weight reduction for female rod end		-0.02	-0.04	-0.04	-0.10	-0.20	-0.20	-0.38	-0.54

Calculation (Example) **CG1WLN32-100Z**
(Foot, ø32, 100 stroke)

- Basic weight..... 0.49 (Foot, ø32)
- Additional weight..... 0.13/50 stroke
- Air cylinder stroke..... 100 stroke

0.49 x 0.13 x 100/50 = **0.75 kg**


Mounting Brackets/Part No.

Mounting bracket	Order q'ty.	Bore size (mm)								Contents
		20	25	32	40	50	63	80	100	
Axial foot	2 (Note)	CG-L020	CG-L025	CG-L032	CG-L040	CG-L050	CG-L063	CG-L080	CG-L100	2 feet, 8 mounting bolts
Flange	1	CG-F020	CG-F025	CG-F032	CG-F040	CG-F050	CG-F063	CG-F080	CG-F100	1 flange, 4 mounting bolts
Trunnion pin	1	CG-T020	CG-T025	CG-T032	CG-T040	CG-T050	CG-T063	—	—	2 trunnion pins, 2 trunnion bolts, 2 flat washers
Pivot bracket	1	CG-020-24A	CG-025-24A	CG-032-24A	CG-040-24A	CG-050-24A	CG-063-24A	—	—	1 pivot bracket


Note) Order two feet per cylinder.

Construction

With rubber bumper

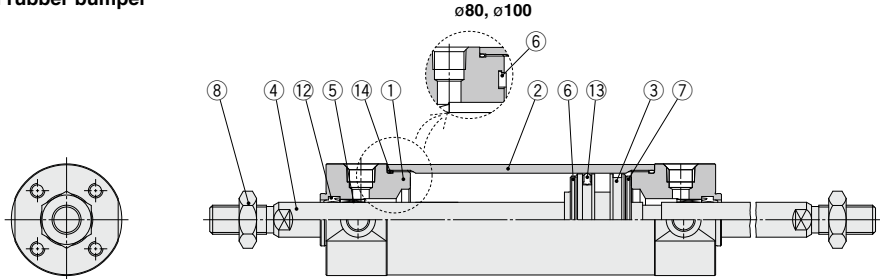

With air cushion

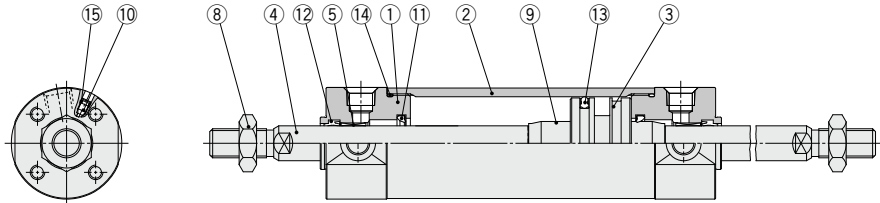

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Hard anodized
2	Cylinder tube	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel	For ø20 or ø25 with built-in magnet
5	Bushing	Bearing alloy	
6	Bumper	Resin	ø32 or larger is common.
7	Bumper	Resin	
8	Rod end nut	Carbon steel	Zinc chromated
9	Cushion ring	Aluminum alloy	
10	Cushion valve	ø40 or smaller ø50 or larger	Carbon steel* Steel wire Electroless nickel plating Zinc chromated
11	Cushion seal	Urethane	
12	Rod seal	NBR	
13	Piston seal	NBR	
14	Tube gasket	NBR	
15	Valve seal	NBR	

Note) For cylinders with auto switches, the magnet is installed in the piston.

* The material for ø20, ø25 cylinders with auto switches is made of stainless steel.

Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
20	CG1WN20Z-PS	Set of the nos. 12, 13, 14
25	CG1WN25Z-PS	
32	CG1WN32Z-PS	
40	CG1WN40Z-PS	

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.

Note) Refer to the Specific Product Precautions on page 362-1 for Disassembly/Replacement. Order with the kit number according to the bore size.

* The seal kit includes a grease pack (10 g). Order with the following part number when only the grease pack is needed.


Grease pack part number: GR-S-010 (10 g)

CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

D-□
-X□
Technical Data


CG1W Series

Basic with Rubber Bumper: CG1WBN

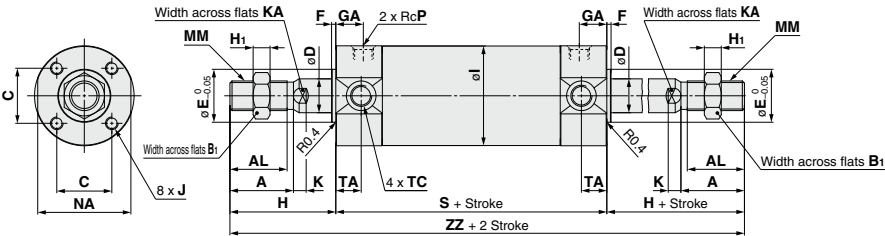


<With rod boot on one side>

Female rod end

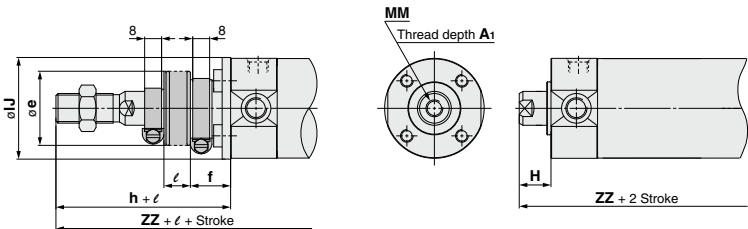

<With rod boot on both sides>

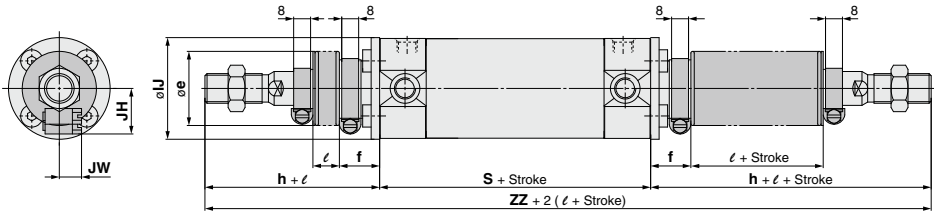


Bore size	Stroke range		A	AL	B ₁	C	D	E	F	GA	H ₁	I	J	K	KA	MM	NA	P	S
	Standard	Long stroke																	
20	Up to 200	201 to 1500	18	15.5	13	14	8	12	2	12	5	26	M4 x 0.7 depth 7	5	6	M8 x 1.25	24	1/8	77
25	Up to 300	301 to 1500	22	19.5	17	16.5	10	14	2	12	6	31	M5 x 0.8 depth 7.5	5.5	8	M10 x 1.25	29	1/8	77
32	Up to 300	301 to 1500	22	19.5	17	20	12	18	2	12	6	38	M5 x 0.8 depth 8	5.5	10	M10 x 1.25	35.5	1/8	79
40	Up to 300	301 to 1500	30	27	19	26	16	25	2	13	8	47	M6 x 1 depth 12	6	14	M14 x 1.5	44	1/8	87
50	Up to 300	301 to 1500	35	32	27	32	20	30	2	14	11	58	M8 x 1.25 depth 16	7	18	M18 x 1.5	55	1/4	102
63	Up to 300	301 to 1500	35	32	27	38	20	32	2	14	11	72	M10 x 1.5 depth 16	7	18	M18 x 1.5	69	1/4	102
80	Up to 300	301 to 1500	40	37	32	50	25	40	3	20	13	89	M10 x 1.5 depth 22	10	22	M22 x 1.5	86	3/8	122
100	Up to 300	301 to 1500	40	37	41	60	30	50	3	20	16	110	M12 x 1.75 depth 22	10	26	M26 x 1.5	106	1/2	122

Bore size	TA	TC**	Without rod boot		With rod boot on one side*										With rod boot* on both sides	
			H	ZZ	e	f	h	IJ	JH (Reference)	JW (Reference)	ℓ	ZZ	ZZ	ZZ	ZZ	ZZ
20	11	M5 x 0.8	35	147	30	18	55	27	15.5	10.5	167	187	187	187	187	187
25	11	M6 x 0.75	40	157	30	19	62	32	16.5	10.5	179	201	201	201	201	201
32	11	M8 x 1.0	40	159	35	19	62	38	18.5	10.5	181	203	203	203	203	203
40	12	M10 x 1.25	50	187	35	19	70	48	21.5	10.5	207	227	227	227	227	227
50	13	M12 x 1.25	58	218	40	19	78	59	24	10.5	238	258	258	258	258	258
63	13	M14 x 1.5	58	218	40	20	78	72	24	10.5	238	258	258	258	258	258
80	—	—	71	264	52	10	80	59	—	—	273	282	282	282	282	282
100	—	—	71	264	62	7	80	71	—	—	273	282	282	282	282	282

Female Rod End					(mm)	
Bore size	A ₁	H	MM	ZZ	ZZ	ZZ
20	8	13	M4 x 0.7	103	103	103
25	8	14	M5 x 0.8	105	105	105
32	12	14	M6 x 1	107	107	107
40	13	15	M8 x 1.25	117	117	117
50	18	16	M10 x 1.5	134	134	134
63	18	16	M10 x 1.5	134	134	134
80	21	19	M14 x 1.5	160	160	160
100	25	22	M16 x 1.5	166	166	166

* The minimum stroke with rod boot is 20 mm.
** Cylinder sizes $\phi 80$ and $\phi 100$ do not have trunnion mounting female thread on the width across flats NA.

Basic with Air Cushion: CG1WBA

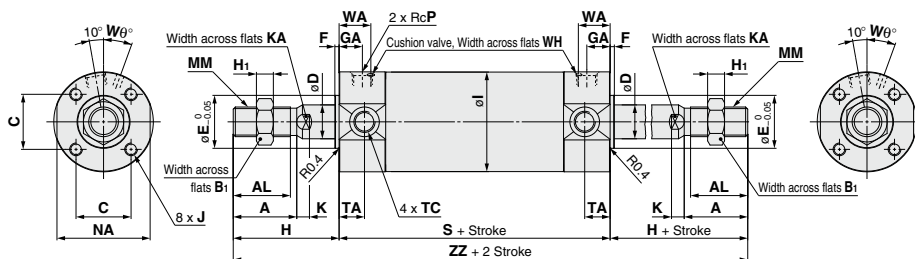

★ For the one with rod boot, refer to w/rubber bumper. (mm)

Bore size	Stroke range		A	AL	B1	C	D	E	F	GA	H	H1	I	J	K	KA
	Standard	Long stroke														
20	Up to 200	201 to 1500	18	15.5	13	14	8	12	2	12	35	5	26	M4 x 0.7 depth 7	5	6
25	Up to 300	301 to 1500	22	19.5	17	16.5	10	14	2	12.5	40	6	31	M5 x 0.8 depth 7.5	5.5	8
32	Up to 300	301 to 1500	22	19.5	17	20	12	18	2	12	40	6	38	M5 x 0.8 depth 8	5.5	10
40	Up to 300	301 to 1500	30	27	19	26	16	25	2	13	50	8	47	M6 x 1 depth 12	6	14
50	Up to 300	301 to 1500	35	32	27	32	20	30	2	14	58	11	58	M8 x 1.25 depth 16	7	18
63	Up to 300	301 to 1500	35	32	27	38	20	32	2	14	58	11	72	M10 x 1.5 depth 16	7	18
80	Up to 300	301 to 1500	40	37	32	50	25	40	3	20	71	13	89	M10 x 1.5 depth 22	10	22
100	Up to 300	301 to 1500	40	37	41	60	30	50	3	20	71	16	110	M12 x 1.75 depth 22	10	26

Bore size	MM	NA	P	S	TA	TC**	ZZ	WA	Wθ	WH
20	M8 x 1.25	24	M5 x 0.8	77	11	M5 x 0.8	147	16	25°	1.5
25	M10 x 1.25	29	M5 x 0.8	77	11	M6 x 0.75	157	16	25°	1.5
32	M10 x 1.25	35.5	Rc1/8	79	11	M8 x 1.0	159	16	25°	1.5
40	M14 x 1.5	44	Rc1/8	87	12	M10 x 1.25	187	17	20°	1.5
50	M18 x 1.5	55	Rc1/4	102	13	M12 x 1.25	218	18	20°	3
63	M18 x 1.5	69	Rc1/4	102	13	M14 x 1.5	218	18	20°	3
80	M22 x 1.5	86	Rc3/8	122	—	—	264	24	20°	4
100	M26 x 1.5	106	Rc1/2	122	—	—	264	24	20°	4

* Refer to w/rubber bumper for the female rod end.

* For mounting brackets, refer to page 309.

** Cylinder sizes ø80 and ø100 do not have trunnion mounting female thread on the width across flats NA.

CG1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□


-X□

Technical Data

CG1W Series

With Mounting Bracket


Axial foot: CG1WL□

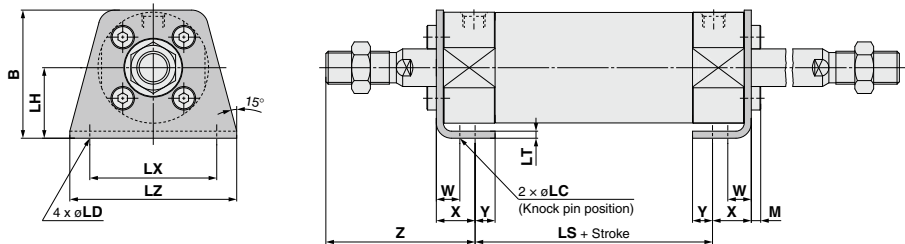

(mm)														
Bore size	Stroke range	B	LC	LD	LH	LS	LT	LX	LZ	M	W	X	Y	Z
20	Up to 1500	34	4	6	20	53	3	32	44	3	10	15	7	47
25	Up to 1500	38.5	4	6	22	53	3	36	49	3.5	10	15	7	52
32	Up to 1500	45	4	7	25	53	3	44	58	3.5	10	16	8	53
40	Up to 1500	54.5	4	7	30	60	3	54	71	4	10	16.5	8.5	63.5
50	Up to 1500	70.5	5	10	40	67	4.5	66	86	5	17.5	22	11	75.5
63	Up to 1500	82.5	5	12	45	67	4.5	82	106	5	17.5	22	13	75.5
80	Up to 1500	101	6	11	55	74	4.5	100	125	5	20	28.5	14	95
100	Up to 1500	121	6	14	65	74	6	120	150	7	20	30	16	95

* Other dimensions are the same as basic type.

Flange: CG1WF□

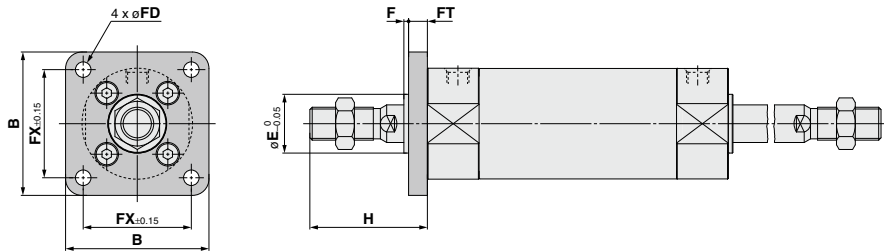


(mm)								
Bore size	Stroke range	B	E	F	FX	FD	FT	H
20	Up to 1500	40	12	2	28	5.5	6	35
25	Up to 1500	44	14	2	32	5.5	7	40
32	Up to 1500	53	18	2	38	6.6	7	40
40	Up to 1500	61	25	2	46	6.6	8	50
50	Up to 1500	76	30	2	58	9	9	58
63	Up to 1500	92	32	2	70	11	9	58
80	Up to 1500	104	40	3	82	11	11	71
100	Up to 1500	128	50	3	100	14	14	71

* End boss is machined on the flange for øE.

* Other dimensions are the same as basic type.

With Mounting Bracket

Trunnion: CG1WU□

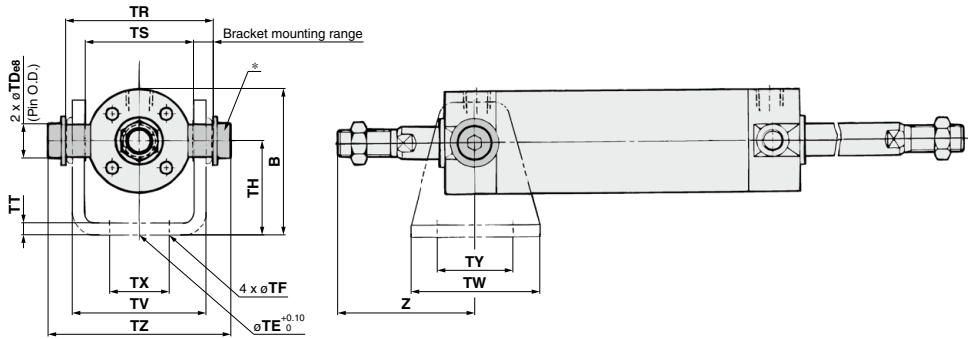

Bore size	Stroke range	B	TDe8	TE	TF	TH	TR	TS	TT	TV	TW	TX	TY	TZ	Z (mm)	
															Without rod boot	With rod boot
20	Up to 1500	38	8 ^{-0.025} _{-0.047}	10	5.5	25	39	28	3.2	(35.8)	42	16	28	47.6	46	66 + ℓ
25	Up to 1500	45.5	10 ^{-0.025} _{-0.047}	10	5.5	30	43	33	3.2	(39.8)	42	20	28	53	51	73 + ℓ
32	Up to 1500	54	12 ^{-0.032} _{-0.059}	10	6.6	35	54.5	40	4.5	(49.4)	48	22	28	67.7	51	73 + ℓ
40	Up to 1500	63.5	14 ^{-0.032} _{-0.059}	10	6.6	40	65.5	49	4.5	(58.4)	56	30	30	78.7	62	82 + ℓ
50	Up to 1500	79	16 ^{-0.032} _{-0.059}	20	9	50	80	60	6	(72.4)	64	36	36	98.6	71	91 + ℓ
63	Up to 1500	96	18 ^{-0.032} _{-0.059}	20	11	60	98	74	8	(90.4)	74	46	46	119.2	71	91 + ℓ

* Constructed of a pin, flat washer and hexagon socket head cap bolt.

* Other dimensions are the same as basic type.

CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

D-□
-X□
Technical Data

Air Cylinder: Standard Type

Single Acting, Spring Return/Extend

CG1 Series

ø20, ø25, ø32, ø40

RoHS



How to Order

Cylinder stroke (mm)
Refer to "Standard Strokes" on page 319.

Action

S	Single acting, Spring return
T	Single acting, Spring extend

Pivot bracket

Nil	None
N	Pivot bracket is shipped together with the product.

* Only for D, U, T mounting types
* Pivot bracket is shipped together with the product, but not assembled.

Type
N Rubber bumper

CG1 B N 25-100 S **Z** **-** **-** **-**

With auto switch

CDG1 B N 25-100 S **Z** **-** **-** **-** **M9BW** **-** **-**

With auto switch
(Built-in magnet)

Mounting

B	Basic	G	Head flange
Z	Basic (without trunnion mounting female thread)	U	Rod trunnion
L	Axial foot	T	Head trunnion
F	Rod flange	D	Clevis

- * Mounting bracket is shipped together with the product, but not assembled.
- * The cylinder for F, G, L, D mounting types is Z: Basic (without trunnion mounting female thread).

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm

Rod end thread

Nil	Male rod end
F	Female rod end

Rod end bracket

Nil	None
V	Single knuckle joint
W	Double knuckle joint

- * No bracket is provided for the female rod end.
- * Rod end bracket is shipped together with the product, but not assembled.
- * A knuckle joint pin is not provided with the single knuckle joint.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
------------	---------------------

* For applicable auto switches, refer to the table below.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDG1FN32-100TZ

Made to Order

For details, refer to page 319.

* Refer to "Ordering Example of Cylinder Assembly" on page 320.

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load					
					DC	AC	Applicable bore size ø20 to ø40		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)							
							Perpendicular	In-line												
Solid state auto switch	—	Grommet	Yes	3-wire (NPN) 3-wire (PNP)	5 V, 12 V	—	M9NV	M9N	●	●	●	○	—	○	IC circuit	Relay, PLC				
		Connector		2-wire			12 V	M9PV	M9P	●	●	●	○	—			○			
	Diagnostic indication (2-color indicator)			Grommet	3-wire (NPN) 3-wire (PNP)		5 V, 12 V	M9BV	M9B	●	●	●	○	—	○		—			
		2-wire			12 V			—	H7C	●	—	●	●	●	—			—		
		Water resistant (2-color indicator)			Grommet			3-wire (NPN) 3-wire (PNP)	5 V, 12 V	M9NVW	M9NW	●	●	●	○			—	○	IC circuit
								2-wire		12 V	M9PWW	M9PW	●	●	●			○	—	
	3-wire (NPN) 3-wire (PNP)			5 V, 12 V			M9BWW	M9BW		●	●	●	○	—	○		—			
	2-wire						12 V	M9NAV ^{*1}		M9NA ^{*1}	○	○	○	○	—			○		
	Diagnostic output (2-color indicator)	Grommet		3-wire (PNP)	5 V, 12 V		M9PAV ^{*1}	M9PA ^{*1}	○	○	●	○	—	○	IC circuit					
				2-wire			12 V	M9BAV ^{*1}	M9BA ^{*1}	○	○	●	○	—			○			
				4-wire (NPN)	5 V, 12 V	—	H7NF	●	—	●	○	—	○	IC circuit						
Reed auto switch	—	Grommet	Yes	3-wire (Equiv. to NPN)	—	5 V	—	A96V	A96	●	—	●	—	—	—	IC circuit	—			
				No	2-wire	24 V	12 V	100 V	A93V ^{*2}	A93	●	●	●	—	—	—		IC circuit		
								100 V or less	A90V	A90	●	—	●	—	—	—				
								100 V, 200 V	—	B54	●	—	●	●	—				—	
	Connector	No	200 V or less	—				B64	●	—	●	—	—	—						
			—	—	C73C	●	—	●	●	●	—									
			24 V or less	—	C80C	●	—	●	●	●		IC circuit								
			—	—	B59W	●	—	●	—	—	—									

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Please consult with SMC regarding water resistant types with the above model numbers.

*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN


* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 361 for details.

* For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.


* The D-A9□□/M9□□□ auto switches are shipped together, (but not assembled). (However, only the auto switch mounting brackets are assembled before shipment.)

Air Cylinder: Standard Type Single Acting, Spring Return/Extend **CG1 Series**

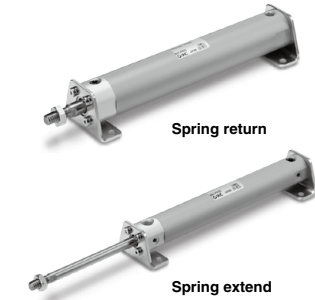


Symbol

Spring return, Rubber bumper



Spring extend, Rubber bumper



Made to Order

[Click here for details](#)

Symbol	Specifications
-XC6	Made of stainless steel*1
-XC20	Head cover axial port*2
-XC27	Double clevis and double knuckle joint pins made of stainless steel
-XC29	Double knuckle joint with spring pin*1
-XC85	Grease for food processing equipment

*1 Applicable only to single acting, spring return type.
For single acting, spring extend type, please contact SMC.

*2 Only compatible with cylinders with rubber bumper.

Refer to pages 355 to 361 for cylinders with auto switches.

- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Minimum stroke for auto switch mounting
- Auto switch mounting brackets/Part no.
- Operating range
- Cylinder mounting bracket, by stroke/ Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Specifications

Bore size (mm)	20	25	32	40	20	25	32	40
Action	Single acting, Spring return				Single acting, Spring extend			
Lubricant	Not required (Non-lube)							
Fluid	Air							
Proof pressure	1.5 MPa							
Maximum operating pressure	1.0 MPa							
Minimum operating pressure	0.18 MPa				0.23 MPa			
Ambient and fluid temperature	Without auto switch: -10°C to 70°C With auto switch : -10°C to 60°C (No freezing)							
Piston speed	50 to 1000 mm/s							
Stroke length tolerance	Up to 200 st ^{+1.4} ₀ mm							
Cushion	Rubber bumper							
Mounting	Basic, Basic (without trunnion mounting female thread), Axial foot, Rod flange, Head flange, Rod trunnion, Head trunnion, Clevis							

Accessories

Refer to page 309 for part numbers and dimensions.

Mounting		Basic	Axial foot	Rod flange	Head flange	Rod trunnion	Head trunnion	Clevis
Standard	Rod end nut	●	●	●	●	●	●	●
	Clevis pin	—	—	—	—	—	—	●
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint* (with pin)	●	●	●	●	●	●	●
	Pivot bracket	—	—	—	—	●	●	●

* A double knuckle joint pin and retaining rings are shipped together.

Standard Strokes

Bore size	Standard stroke ^{Note1)} (mm)
20	25, 50, 75, 100, 125
25, 32, 40	25, 50, 75, 100, 125, 150, 200

Note 1) Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Note 2) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

Theoretical Output

Refer to page 1903.

Spring Reaction Force

Refer to page 1900.

Mounting Brackets/Part No.

Mounting bracket	Order q'ty.	Bore size (mm)				Contents
		20	25	32	40	
Axial foot	2 ^{Note)}	CG-L020	CG-L025	CG-L032	CG-L040	2 foots, 8 mounting bolts
Flange	1	CG-F020	CG-F025	CG-F032	CG-F040	1 flange, 4 mounting bolts
Trunnion pin	1	CG-T020	CG-T025	CG-T032	CG-T040	2 trunnion pins, 2 trunnion bolts, 2 flat washers
Clevis	1	CG-D020	CG-D025	CG-D032	CG-D040	1 clevis, 4 mounting bolts, 1 clevis pin, 2 retaining rings
Pivot bracket	1	CG-020-24A	CG-025-24A	CG-032-24A	CG-040-24A	1 pivot bracket


Note) Order two foots per cylinder.

Ordering Example of Cylinder Assembly

Cylinder model: CDG1DN20-100Z-NW-M9BW

Mounting	D: Clevis
Pivot bracket	N: Yes
Rod end bracket	W: Double knuckle joint
Auto switch D-M9BW:	2 pcs.

*Pivot bracket, double knuckle joint and auto switch are shipped together with the product, but not assembled.

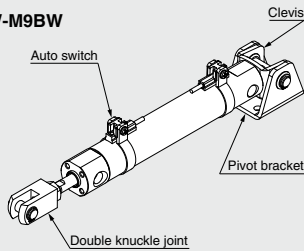

Weights

Spring return		(kg)			
Bore size (mm)		20	25	32	40
Basic weight	25 st	0.17	0.27	0.40	0.63
	50 st	0.19	0.30	0.45	0.71
	75 st	0.26	0.40	0.58	0.91
	100 st	0.28	0.43	0.62	0.99
	125 st	0.35	0.53	0.76	1.20
	150 st	—	0.56	0.81	1.28
	200 st	—	0.69	0.98	1.56
Mounting bracket weight	Axial foot	0.11	0.13	0.16	0.22
	Flange	0.08	0.10	0.14	0.20
	Trunnion	0.01	0.02	0.03	0.05
	Clevis	0.05	0.08	0.15	0.23
Accessories	Pivot bracket	0.08	0.09	0.17	0.25
	Single knuckle joint	0.05	0.09	0.09	0.10
	Double knuckle joint (with pin)	0.05	0.09	0.09	0.13
Weight reduction for female rod end		-0.01	-0.02	-0.02	-0.05


Calculation (Example) **CG1LN20-100SZ** • Basic weight..... 0.28 kg (ø20)
(Foot, ø20, 100 stroke) • Mounting bracket weight..... 0.11 kg (Foot)
0.28 + 0.11 = **0.39 kg**

Spring extend		(kg)			
Bore size (mm)		20	25	32	40
Basic weight	25 st	0.16	0.25	0.38	0.59
	50 st	0.18	0.28	0.43	0.67
	75 st	0.24	0.37	0.54	0.83
	100 st	0.26	0.40	0.58	0.91
	125 st	0.32	0.48	0.69	1.08
	150 st	—	0.50	0.72	1.12
	200 st	—	0.63	0.89	1.40
Mounting bracket weight	Axial foot	0.11	0.13	0.16	0.22
	Flange	0.08	0.10	0.14	0.20
	Trunnion	0.01	0.02	0.03	0.05
	Clevis	0.05	0.08	0.15	0.23
Accessories	Pivot bracket	0.08	0.09	0.17	0.25
	Single knuckle joint	0.05	0.09	0.09	0.10
	Double knuckle joint (with pin)	0.05	0.09	0.09	0.13
Weight reduction for female rod end		-0.01	-0.02	-0.02	-0.05


Calculation (Example) **CG1LN20-100TZ** • Basic weight..... 0.26 kg (ø20)
(Foot, ø20, 100 stroke) • Mounting bracket weight..... 0.11 kg (Foot)
0.26 + 0.11 = **0.37 kg**

Construction

Single acting, Spring return

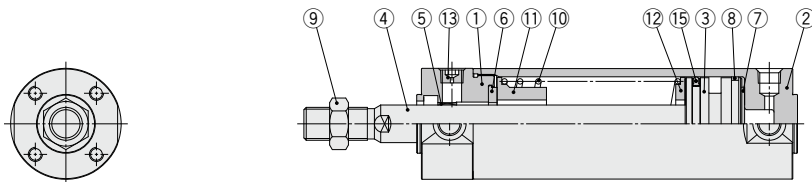

Single acting, Spring extend

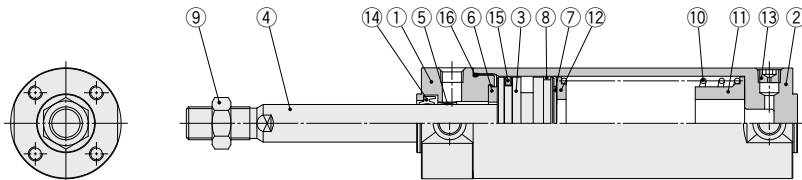

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Hard anodized
2	Tube cover	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel	For ø20 or ø25 with built-in magnet
		Carbon steel*	Hard chrome plating*
5	Bushing	Bearing alloy	
6	Bumper	Resin	ø32 or larger is common.
7	Bumper	Resin	
8	Wear ring	Resin	
9	Rod end nut	Carbon steel	Zinc chromated
10	Return spring	Steel wire	Zinc chromated
11	Spring guide	Aluminum alloy	
12	Spring seat	Aluminum alloy	
13	Plug with breathing hole	Alloy steel	Black zinc chromated
14	Rod seal	NBR	
15	Piston seal	NBR	
16	Tube gasket	NBR	

Note) For cylinders with auto switches, the magnet is installed in the piston.

* The material for ø20, ø25 cylinders with auto switches is made of stainless steel.

Replacement Part: Seal

• For single acting, spring return

No.	Description	Material	Part no.			
			20	25	32	40
15	Piston seal	NBR	CG1N20-S-PS	CG1N25-S-PS	CG1N32-S-PS	CG1N40-S-PS

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.

• For single acting, spring extend

Replacement parts/Seal kits are the same as standard type, double acting, single rod (with rubber bumper). Refer to page 298.

Note) Refer to the Specific Product Precautions on page 362-1 for Disassembly/Replacement. Order with the kit number according to the bore size.

* The seal kit includes a grease pack (10 g).

Order with the following part number when only the grease pack is needed.

Grease pack part number: GR-S-010 (10 g)

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□


-X□

Technical
Data


CG1 Series

Basic


Spring return: CG1BN

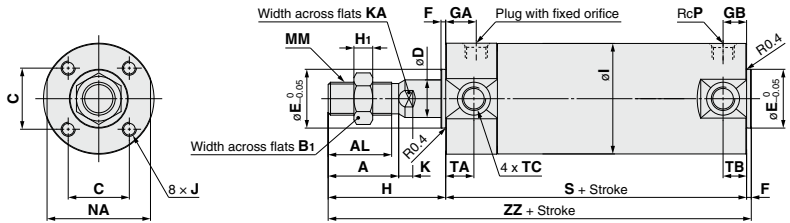

Spring extend: CG1BN

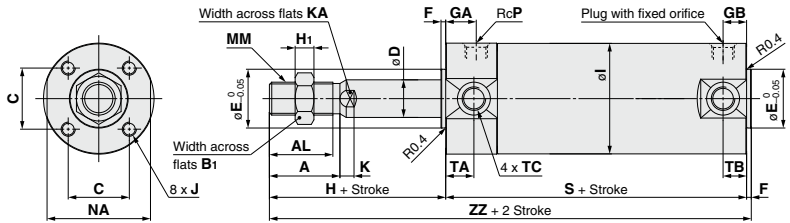

Female rod end

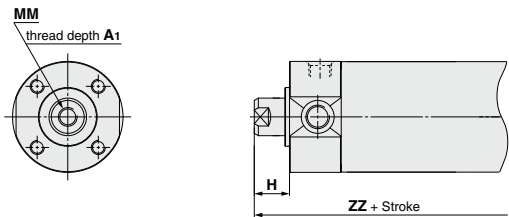


(mm)																			
Bore size	Stroke range	A	AL	B ₁	C	D	E	F	GA	GB	H	H ₁	I	J	K	KA	MM	NA	P
20	Up to 125	18	15.5	13	14	8	12	2	12	10	35	5	26	M4 x 0.7 depth 7	5	6	M8 x 1.25	24	1/8
25	Up to 200	22	19.5	17	16.5	10	14	2	12	10	40	6	31	M5 x 0.8 depth 7.5	5.5	8	M10 x 1.25	29	1/8
32	Up to 200	22	19.5	17	20	12	18	2	12	10	40	6	38	M5 x 0.8 depth 8	5.5	10	M10 x 1.25	35.5	1/8
40	Up to 200	30	27	19	26	16	25	2	13	10	50	8	47	M6 x 1 depth 12	6	14	M14 x 1.5	44	1/8

Female Rod End												(mm)			
Bore size	A1	H	MM	1 to 50 st				51 to 100 st				101 to 125 st			
				ZZ	ZZ	ZZ	ZZ	ZZ	ZZ	ZZ	ZZ	ZZ	ZZ	ZZ	ZZ
20	8	13	M4 x 0.7	109	134	159	—	109	134	159	—	109	134	159	—
25	8	14	M5 x 0.8	110	135	160	185	110	135	160	185	110	135	160	185
32	12	14	M6 x 1	112	137	162	187	112	137	162	187	112	137	162	187
40	13	15	M8 x 1.25	120	145	170	195	120	145	170	195	120	145	170	195

Air Cylinder: Standard Type Single Acting, Spring Return/Extend **CG1 Series**


With Mounting Bracket (Note) The drawings below show the single acting/spring return type.
The rod is in retracted state for spring extend type.

Axial foot: CG1LN

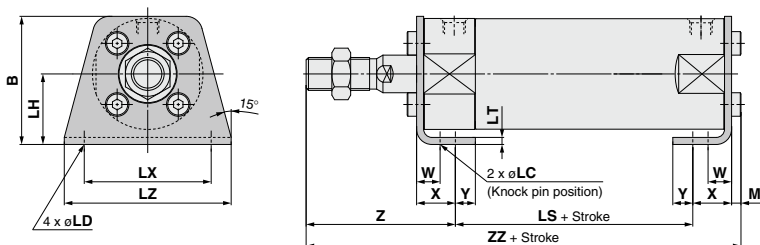


Bore size	Stroke range	B	M	LC	LD	LH	LT	LX	LZ	W	X	Y	Z	(mm)			
														1 to 50 st	51 to 100 st	101 to 125 st	126 to 200 st
														LS	ZZ	LS	ZZ
20	Up to 125	34	3	4	6	20	3	32	44	10	15	7	47	70	135	95	160
25	Up to 200	38.5	3.5	4	6	22	3	36	49	10	15	7	52	70	140.5	95	165.5
32	Up to 200	45	3.5	4	7	25	3	44	58	10	16	8	53	70	142.5	95	167.5
40	Up to 200	54.5	4	4	7	30	3	54	71	10	16.5	8.5	63.5	76	160	101	185

Rod flange: CG1FN

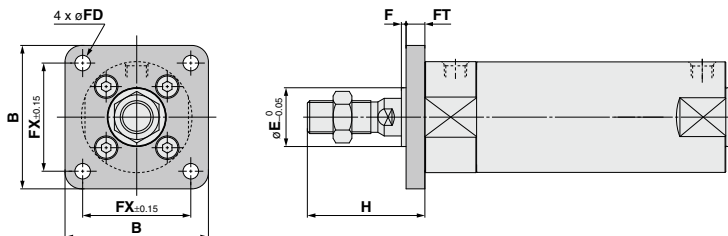

Head flange: CG1GN

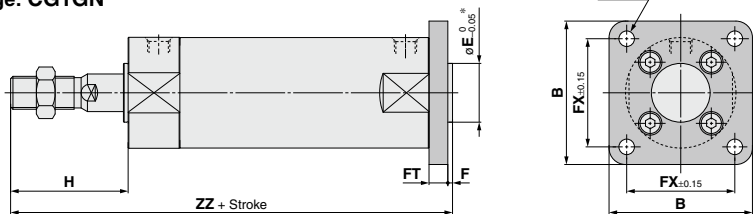

Bore size	Stroke range	B	E	F	FX	FD	FT	H
20	Up to 125	40	12	2	28	5.5	6	35
25	Up to 200	44	14	2	32	5.5	7	40
32	Up to 200	53	18	2	38	6.6	7	40
40	Up to 200	61	25	2	46	6.6	8	50

* End boss is machined on the flange for øE.

Rod Flange

Bore size	ZZ (mm)			
	1 to 50 st	51 to 100 st	101 to 125 st	126 to 200 st
20	131	156	181	—
25	136	161	186	211
32	138	163	188	213
40	155	180	205	230

Head Flange

Bore size	ZZ (mm)			
	1 to 50 st	51 to 100 st	101 to 125 st	126 to 200 st
20	130	162	187	—
25	143	168	193	218
32	145	170	195	220
40	163	188	213	238

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□


-X□

Technical Data


CG1 Series

With Mounting Bracket

Rod trunnion: CG1UN

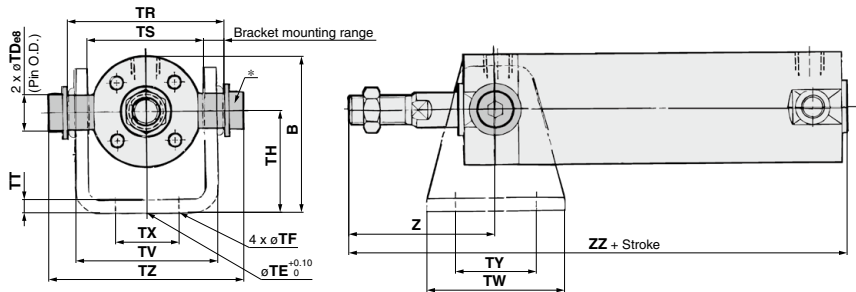

Head trunnion: CG1TN

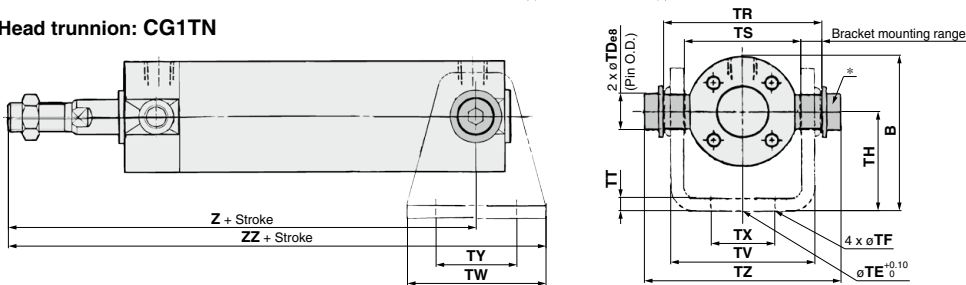

Bore size	Stroke range	B	TD ₈	TE	TF	TH	TR	TS	TT	TV	TW	TX	TY	TZ
20	Up to 125	38	8 ^{+0.05} _{-0.047}	10	5.5	25	39	28	3.2	(35.8)	42	16	28	47.6
25	Up to 200	45.5	10 ^{+0.05} _{-0.047}	10	5.5	30	43	33	3.2	(39.8)	42	20	28	53
32	Up to 200	54	12 ^{+0.032} _{-0.059}	10	6.6	35	54.5	40	4.5	(49.4)	48	22	28	67.7
40	Up to 200	63.5	14 ^{+0.032} _{-0.059}	10	6.6	40	65.5	49	4.5	(58.4)	56	30	30	78.7

Rod Trunnion (mm)

Bore size	Z	ZZ
	1 to 50 st	51 to 100 st 101 to 125 st 126 to 200 st
20	46	131 156 181 —
25	51	136 161 186 211
32	51	138 163 188 213
40	62	155 180 205 230


* Constructed of pins, flat washers and hexagon socket head cap bolts.
* Other dimensions are the same as basic type.

Head Trunnion (mm)

Bore size	1 to 50 st	51 to 100 st	101 to 125 st	126 to 200 st
	Z ZZ	Z ZZ	Z ZZ	Z ZZ
20	118 139	143 164	168 189	— —
25	123 144	148 169	173 194	198 219
32	126 150	151 175	176 200	201 225
40	143 171	168 196	193 221	218 246

* Constructed of pins, flat washers and hexagon socket head cap bolts.
* Other dimensions are the same as basic type.

Clevis: CG1DN

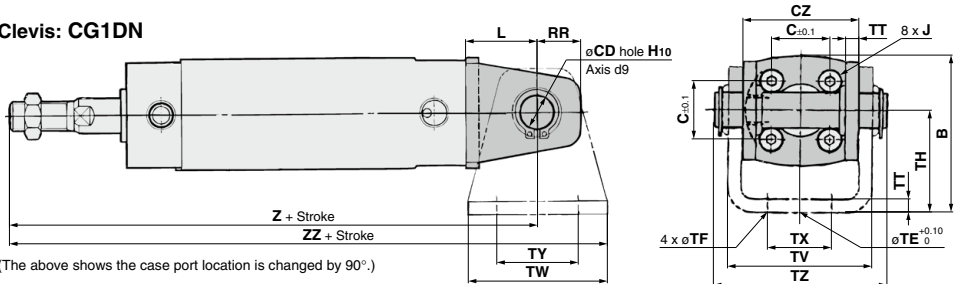

(The above shows the case port location is changed by 90°.)

Clevis

Bore size	Stroke range	B	CD	CZ	L	RR	TE	TF	TH	TT	TV	TW	TX	TY	TZ	1 to 50 st	51 to 100 st	101 to 125 st	126 to 200 st
																Z ZZ	Z ZZ	Z ZZ	Z ZZ
20	Up to 125	38	8	29	14	11	10	5.5	25	3.2	(35.8)	42	16	28	43.4	143	164	168	189
25	Up to 200	45.5	10	33	16	13	10	5.5	30	3.2	(39.8)	42	20	28	48	150	171	175	196
32	Up to 200	54	12	40	20	15	10	6.6	35	4.5	(49.4)	48	22	28	59.4	156	180	181	205
40	Up to 200	63.5	14	49	22	18	10	6.6	40	4.5	(58.4)	56	30	30	71.4	175	200	200	228

* For dimensions of pivot bracket, refer to page 309.
* Other dimensions are the same as basic type.

Air Cylinder: Non-rotating Rod Type Double Acting

CG1K Series

ø20, ø25, ø32, ø40, ø50, ø63

RoHS

How to Order

Type

N	Rubber bumper
A	Air cushion (ø40 to ø63 only)

Cylinder stroke (mm)
Refer to "Standard Strokes" on page 326.

Pivot bracket

Nil	None
N	Pivot bracket is shipped together with the product.

* Only for D, U, T mounting types
* Pivot bracket is shipped together with the product, but not assembled.

CG1K B N 25-100 Z- - -

With auto switch **CDG1K B N 25-100 Z- - - M9BW - - -**

With auto switch (Built-in magnet)
Double acting, Non-rotating rod type

Mounting

B	Basic	G	Head flange
Z*	Basic (without trunnion mounting female thread)	U	Rod trunnion
L	Axial foot	T	Head trunnion
F	Rod flange	D	Clevis

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Rod end bracket

Nil	None
V	Single knuckle joint
W	Double knuckle joint

* No bracket is provided for the female rod end.
* Rod end bracket is shipped together with the product, but not assembled.
* A knuckle joint pin is not provided with the single knuckle joint.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
-----	---------------------

* For applicable auto switches, refer to the table below.

Rod end thread

Nil	Male rod end
F	Female rod end

Made to Order
For details, refer to page 326.

Note) Mounting bracket is shipped together with the product, but not assembled.
* The cylinder for F, G, L, D mounting types is Z: Basic (without trunnion mounting female thread).

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.

(Example) CDG1KFA32-100Z

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load		
					DC	AC	Applicable bore size		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)				
							Perpendicular	In-line									
Solid state auto switch	_____	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC	
				3-wire (PNP)				M9PV	M9P	●	●	●	○	○			
		Connector	2-wire	12 V				M9BV	M9B	●	●	●	○	○			—
			—					H7C	●	●	●	●	—				
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	5 V, 12 V	M9NVW	M9NW	●	●	●	○	○	IC circuit				
				3-wire (PNP)		M9PVW	M9PW	●	●	●	○	○					
	Water resistant (2-color indicator)	Grommet	Yes	2-wire	5 V, 12 V	M9BWV	M9BW	●	●	●	○	○	—				
				3-wire (NPN)		M9NAV ^{*1}	M9NA ^{*1}	○	○	●	○	○		IC circuit			
				3-wire (PNP)		M9PAV ^{*1}	M9PA ^{*1}	○	○	●	○	○			—		
				2-wire		M9BAV ^{*1}	M9BA ^{*1}	○	○	○	○	○		—			
Diagnostic output (2-color indicator)	4-wire (NPN)	5 V, 12 V	—	H7NF	●	●	●	○	○	IC circuit							
Reed auto switch	_____	Grommet	Yes	3-wire (Equiv. to NPN)	24 V	12 V	A96V	A96	●	●	●	—	—	IC circuit	Relay, PLC		
				No			100 V	A93V ^{*2}	A93	●	●	●	—			—	—
		Yes	100 V or less	A90V			A90	●	●	●	—	—	IC circuit				
		No	100 V, 200 V	—			B54	●	●	●	—	—		—			
	Connector	Yes	2-wire	24 V or less	—	B64	●	●	●	—	—	—					
			—		—	C73C	●	●	●	●	—		—				
	Diagnostic indication (2-color indicator)	Grommet	Yes	—	—	—	C80C	●	●	●	●	—		IC circuit			
				—	—	—	B59W	●	●	●	—	—	—				

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Please consult with SMC regarding water resistant types with the above model numbers.

*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW 5 m..... Z (Example) M9NWZ
1 m..... M (Example) M9NWM None..... N (Example) H7CN

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 361 for details.

* For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.

* The D-A93□□/M9□□□ auto switches are shipped together, (but not assembled). (However, only the auto switch mounting brackets are assembled before shipment.)

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□


Technical Data

CG1K Series




Symbol

Rubber bumper



Air cushion




Made to Order
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC8	Adjustable stroke cylinder/Adjustable extension type*1
-XC9	Adjustable stroke cylinder/Adjustable retraction type*1
-XC10	Dual stroke cylinder/Double rod type
-XC11	Dual stroke cylinder/Single rod type*1
-XC12	Tandem cylinder*1, *2
-XC13	Auto switch rail mounting*1
-XC20	Head cover axial port*1
-XC27	Double clevis and double knuckle joint pins made of stainless steel

*1 Only compatible with cylinders with rubber bumper.

*2 The shape is the same as the current product. Use the current seal kit.

Refer to pages 355 to 361 for cylinders with auto switches.
<ul style="list-style-type: none">• Auto switch proper mounting position (detection at stroke end) and its mounting height• Minimum stroke for auto switch mounting• Auto switch mounting brackets/Part no.• Operating range• Cylinder mounting bracket, by stroke/ Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Specifications

Bore size (mm)	20	25	32	40	50	63
Action	Double acting, Single rod					
Lubricant	Not required (Non-lube)					
Fluid	Air					
Proof pressure	1.5 MPa					
Maximum operating pressure	1.0 MPa					
Minimum operating pressure	0.05 MPa					
Ambient and fluid temperature	Without auto switch: -10°C to 70°C With auto switch : -10°C to 60°C (No freezing)					
Piston speed	50 to 500 mm/s					
Stroke length tolerance	Up to 1000 st ^{+1.4} ₀ mm, Up to 1500 st ^{+1.8} ₀ mm					
Cushion	Rubber bumper, Air cushion (ø40 to ø63 only)					
Rod non-rotating accuracy ^{Note)}	±1°	±0.8°	±0.5°	±0.5°	±0.5°	±0.5°
Mounting	Basic, Basic (without trunnion mounting female thread), Axial foot, Rod flange, Head flange, Rod trunnion, Head trunnion, Clevis					

Note) The values are for standard strokes.

Accessories

Refer to page 309 for part numbers and dimensions.

Mounting		Basic	Axial foot	Rod flange	Head flange	Rod trunnion	Head trunnion	Clevis
Standard	Rod end nut	●	●	●	●	●	●	●
	Clevis pin	—	—	—	—	—	—	●
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint* (With pin)	●	●	●	●	●	●	●
	Pivot bracket	—	—	—	—	●	●	●

* A double knuckle joint pin and retaining rings are shipped together.

Standard Strokes

Bore size	Standard stroke ^{Note 1)}	Maximum manufacturable stroke ^{Note 2)} (mm)
20	25, 50, 75, 100, 125, 150, 200	201 to 1500
25	25, 50, 75, 100, 125, 150, 200, 250, 300	301 to 1500
32		
40		
50, 63		

Note 1) Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Note 2) The maximum manufacturable stroke shows the long stroke.


Note 3) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

Ordering Example of Cylinder Assembly

Cylinder model: CDG1KDN20-100Z-NW-M9BW

Mounting	D: Clevis
Pivot bracket	N: Yes
Rod end bracket	W: Double knuckle joint
Auto switch	D-M9BW: 2 pcs.

*Pivot bracket, double knuckle joint and auto switch are shipped together with the product, but not assembled.

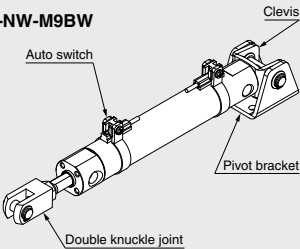

Weights

		(kg)					
Bore size (mm)		20	25	32	40	50	63
Basic weight	Basic	0.10	0.17	0.26	0.41	0.77	1.07
	Axial foot	0.21	0.30	0.42	0.63	1.25	1.79
	Flange	0.18	0.27	0.40	0.61	1.11	1.57
	Trunnion	0.11	0.19	0.29	0.46	0.91	1.21
	Clevis	0.15	0.25	0.41	0.64	1.17	1.75
Pivot bracket		0.08	0.09	0.17	0.25	0.44	0.80
Single knuckle joint		0.05	0.09	0.09	0.10	0.22	0.22
Double knuckle joint (with pin)		0.05	0.09	0.09	0.13	0.26	0.26
Additional weight per 50 mm of stroke		0.05	0.07	0.09	0.15	0.22	0.26
Additional weight with air cushion		—	—	—	0	0.01	0.04
Additional weight for long stroke		0.01	0.01	0.02	0.03	0.06	0.12
Weight reduction for female rod end		-0.01	-0.02	-0.02	-0.05	-0.10	-0.10

Calculation (Example) **CG1KLN20-100Z**

(Foot, ø20, 100 stroke)

• Basic weight..... 0.21 (Foot, ø20)

• Additional weight..... 0.05/50 stroke

• Air cylinder stroke..... 100 stroke

0.21 + 0.05 x 100/50 = **0.31 kg**

Mounting Brackets/Part No.

Mounting bracket	Order q'ty.	Bore size (mm)						Contents
		20	25	32	40	50	63	
Axial foot	2 Note)	CG-L020	CG-L025	CG-L032	CG-L040	CG-L050	CG-L063	2 foots, 8 mounting bolts
Flange	1	CG-F020	CG-F025	CG-F032	CG-F040	CG-F050	CG-F063	1 flange, 4 mounting bolts
Trunnion pin	1	CG-T020	CG-T025	CG-T032	CG-T040	CG-T050	CG-T063	2 trunnion pins, 2 trunnion bolts, 2 flat washers
Clevis	1	CG-D020	CG-D025	CG-D032	CG-D040	CG-D050	CG-D063	1 clevis, 4 mounting bolts, 1 clevis pin, 2 retaining rings
Pivot bracket	1	CG-020-24A	CG-025-24A	CG-032-24A	CG-040-24A	CG-050-24A	CG-063-24A	1 pivot bracket

Note) Order two foots per cylinder.

CG1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□


-X□

Technical
Data


CG1K Series

Construction

With rubber bumper

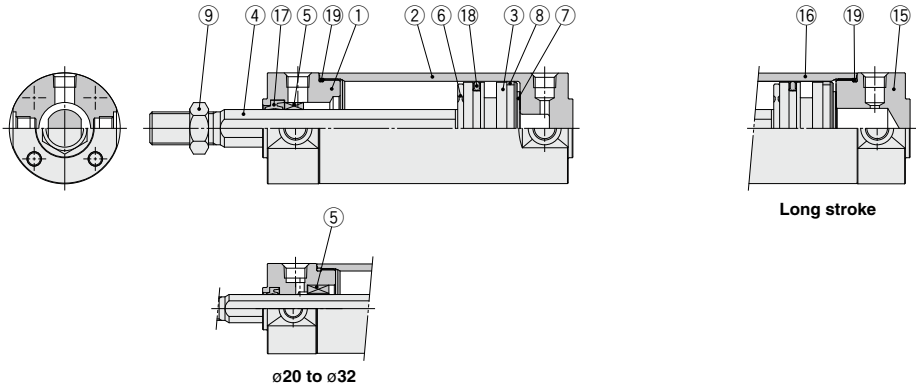

With air cushion

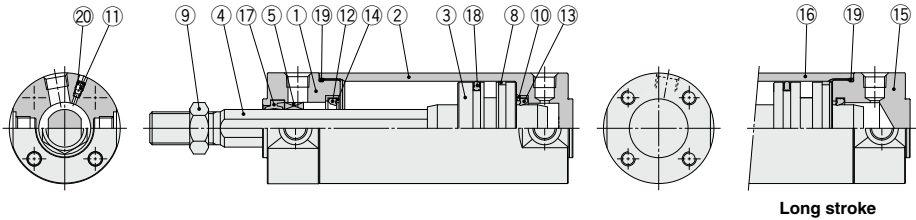

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Hard anodized
2	Tube cover	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel Carbon steel*	For ø20 or ø25 with built-in magnet Hard chrome plating*
5	Non-rotating guide	Bearing alloy	
6	Bumper	Resin	ø32 or larger is common.
7	Bumper	Resin	
8	Wear ring	Resin	
9	Rod end nut	Carbon steel	Zinc chromated
10	Seal retainer	Rolled steel	Zinc chromated
11	Cushion valve	ø40 or smaller Carbon steel	Electroless nickel plating
		ø50 or larger Steel wire	Zinc chromated
12	Cushion seal A	Urethane	ø32 or larger is common.
13	Cushion seal B	Urethane	
14	Cushion seal holder	Aluminum alloy	
15	Head cover	Aluminum alloy	Hard anodized
16	Cylinder tube	Aluminum alloy	Hard anodized
17	Rod seal	NBR	
18	Piston seal	NBR	
19	Tube gasket	NBR	
20	Valve seal	NBR	

Note) For cylinders with auto switches, the magnet is installed in the piston.

* The material is stainless steel for ø20 to ø32.

Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
20	CG1KN20Z-PS	Set of the nos. 17, 18, 19
25	CG1KN25Z-PS	
32	CG1KN32Z-PS	
40	CG1KN40Z-PS	

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.


Note) Refer to the Specific Product Precautions on page 362-1 for Disassembly/Replacement. Order with the kit number according to the bore size.

* The seal kit includes a grease pack (10 g). Order with the following part number when only the grease pack is needed.


Grease pack part number: GR-S-010 (10 g)

Basic

With rubber bumper ø20 to ø63

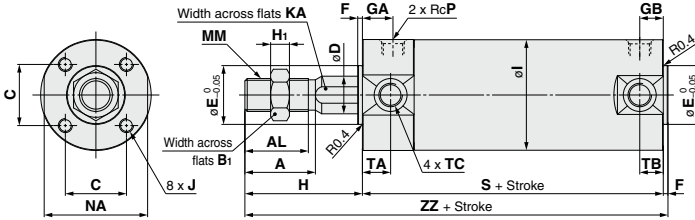

With air cushion ø40 to ø63

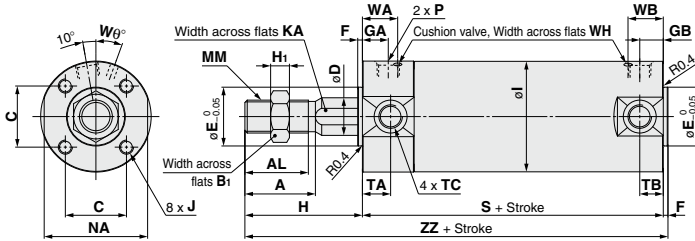


With Air Cushion (mm)

Bore size	WA	WB	Wθ	WH
40	17	15 (17)	20°	1.5
50	18	16 (18)	20°	3
63	18	17 (18)	20°	3

Note) (): Denotes the dimensions for long stroke.

Female rod end

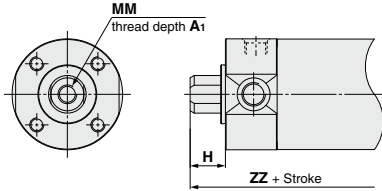

Female Rod End (mm)

Bore size	A ₁	H	MM	ZZ
20	8	13	M4 x 0.7	84 (92)
25	8	14	M5 x 0.8	85 (93)
32	12	14	M6 x 1	87 (95)
40	13	15	M8 x 1.25	95 (104)
50	18	16	M10 x 1.5	108 (120)
63	18	16	M10 x 1.5	108 (120)

Bore size	Stroke range		A	AL	B ₁	C	D	E	F	GA	GB	H	H ₁	I	J	KA	MM	NA	P	S	TA	TB	TC	ZZ
	Standard	Long stroke																						
20	Up to 200	201 to 1500	18	15.5	13	14	9.2	12	2	12	10 (12)	35	5	26	M4 x 0.7 depth 7	8	M8 x 1.25	24	1/8	69 (77)	11	11	M5 x 0.8	106 (114)
25	Up to 300	301 to 1500	22	19.5	17	16.5	11	14	2	12	10 (12)	40	6	31	M5 x 0.8 depth 7.5	10	M10 x 1.25	29	1/8	69 (77)	11	11	M6 x 0.75	111 (119)
32	Up to 300	301 to 1500	22	19.5	17	20	12	18	2	12	10 (12)	40	6	38	M5 x 0.8 depth 8	10	M10 x 1.25	35.5	1/8	71 (79)	11	10 (11)	M8 x 1.0	113 (121)
40	Up to 300	301 to 1500	30	27	19	26	16	25	2	13	10 (13)	50	8	47	M6 x 1 depth 12	14	M14 x 1.5	44	1/8	78 (87)	12	10 (12)	M10 x 1.25	130 (139)
50	Up to 300	301 to 1500	35	32	27	32	20	30	2	14	12 (14)	58	11	58	M8 x 1.25 depth 16	18	M18 x 1.5	55	1/4	90 (102)	13	12 (13)	M12 x 1.25	150 (162)
63	Up to 300	301 to 1500	35	32	27	38	20	32	2	14	12 (14)	58	11	72	M10 x 1.5 depth 16	18	M18 x 1.5	69	1/4	90 (102)	13	12 (13)	M14 x 1.5	150 (162)

Note 1) Dimensions for each mounting bracket are the same as those for the CG1 standard or long stroke model. Refer to pages 301 to 307.

Note 2) (): Denotes the dimensions for long stroke.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data

Air Cylinder: Non-rotating Rod Type Double Acting, Double Rod

CG1KW Series

ø20, ø25, ø32, ø40, ø50, ø63

RoHS

How to Order

CG1KW L N 25 - 100 Z

With auto switch **CDG1KW L N 25 - 100 Z - M9BW**

With auto switch
(Built-in magnet)

Non-rotating rod type

Double acting, Double rod type

Mounting

B	Basic
Z*	Basic (without trunnion mounting female thread)
L	Axial foot
F	Flange
U	Trunnion

Type

N	Rubber bumper
----------	---------------

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Cylinder stroke (mm)

Refer to "Standard Strokes" on page 331.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
------------	---------------------

* For applicable auto switches, refer to the table below.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDG1KWN32-100Z

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load							
					DC	AC	Applicable bore size		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)									
							ø20 to ø63															
							Perpendicular	In-line														
Solid state auto switch	—	Grommet	No	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	—	—	—	IC circuit	Relay, PLC					
				3-wire (PNP)				M9PV	M9P	●	●	●	—	—	—							
	Connector	Yes	2-wire	12 V				M9BV	M9B	●	●	●	—	—	—			—				
			—	H7C				●	—	●	●	—	—	—								
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)				M9NVW	M9NW	●	●	●	—	—	—			—	IC circuit			
				3-wire (PNP)				M9PVW	M9PW	●	●	●	—	—	—			—				
				2-wire				M9BWV	M9BW	●	●	●	—	—	—			—				
				3-wire (NPN)				M9NAV ^{*1}	M9NA ^{*1}	○	○	●	—	—	—			—		IC circuit		
	3-wire (PNP)	M9PAV ^{*1}	M9PA ^{*1}	○				○	●	—	—	—	—									
	Water resistant (2-color indicator)	Grommet	Yes	2-wire				M9BAV ^{*1}	M9BA ^{*1}	○	○	●	—	—	—			—				
4-wire (NPN)				—	H7NF	●	—	●	○	—	—	—	—	IC circuit								
Reed auto switch	—	Grommet	Yes	3-wire (Equiv. to NPN)	24 V	5 V	—	A96V	A96	●	—	●	—	—	—	IC circuit	—					
				No				100 V	A93V ^{*2}	A93	●	●	●	—	—			—	—			
								100 V or less	A90V	A90	●	—	●	—	—			—	—	—	IC circuit	
								100 V, 200 V	—	B54	●	—	●	—	—			—	—			
		Connector	Yes	200 V or less				—	B64	●	—	●	—	—	—			—	—			
				—				—	C73C	●	—	●	●	—	—			—				
		Grommet	No	24 V or less				—	C80C	●	—	●	●	—	—			—	IC circuit			
				—				—	B59W	●	—	●	—	—	—			—				
				Grommet				Yes	—	—	—	—	●	—	●			—		—	—	—
									—	—	—	—	●	—	●			—		—	—	

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Please consult with SMC regarding water resistant types with the above model numbers.

*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW 5 m..... Z (Example) M9NWZ
1 m..... M (Example) M9NWM None..... N (Example) H7CN
3 m..... L (Example) M9NWL

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 361 for details.

* For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.


* The D-A9□□/M9□□ auto switches are shipped together, (but not assembled). (However, only the auto switch mounting brackets are assembled before shipment.)

Air Cylinder: Non-rotating Rod Type Double Acting, Double Rod **CG1KW Series**



Symbol

Rubber bumper



Refer to pages 355 to 361 for cylinders with auto switches.

- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Minimum stroke for auto switch mounting
- Auto switch mounting brackets/Part no.
- Operating range
- Cylinder mounting bracket, by stroke/ Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Weights

Bore size (mm)		20	25	32	40	50	63
Basic weight	Basic	0.13	0.22	0.33	0.55	1.02	1.37
	Axial foot	0.24	0.35	0.49	0.77	1.50	2.09
	Flange	0.21	0.32	0.47	0.75	1.36	1.87
	Trunnion	0.14	0.24	0.36	0.60	1.16	1.51
Pivot bracket		0.08	0.09	0.17	0.25	0.44	0.80
Single knuckle joint		0.05	0.09	0.09	0.10	0.22	0.22
Double knuckle joint (with pin)		0.05	0.09	0.09	0.13	0.26	0.26
Additional weight per 50 mm of stroke		0.07	0.10	0.13	0.23	0.34	0.38
Weight reduction for female rod end		-0.02	-0.04	-0.04	-0.10	-0.20	-0.20

Calculation (Example) **CG1KWLN32-100Z**

(Foot, ø32, 100 stroke)

• Basic weight.....0.49 (Foot, ø32)
• Additional weight.....0.13/50 stroke
• Air cylinder stroke.....100 stroke
 $0.49 + 0.13 \times 100/50 = 0.75 \text{ kg}$

Specifications

Bore size (mm)	20	25	32	40	50	63
Action	Double acting, Double rod					
Lubricant	Not required (Non-lube)					
Fluid	Air					
Proof pressure	1.5 MPa					
Maximum operating pressure	1.0 MPa					
Minimum operating pressure	0.08 MPa					
Ambient and fluid temperature	Without auto switch: -10°C to 70°C With auto switch : -10°C to 60°C (No freezing)					
Piston speed	50 to 500 mm/s					
Stroke length tolerance	Up to 1000 st $\pm 1.4_0^{+1.0}$ mm, Up to 1500 st $\pm 1.8_0^{+1.8}$ mm					
Cushion	Rubber bumper					
Rod non-rotating accuracy <small>Note)</small>	$\pm 1^\circ$		$\pm 0.8^\circ$		$\pm 0.5^\circ$	
Mounting	Basic, Basic (without trunnion mounting female thread), Axial foot, Flange, Trunnion					

* Foot and flange types of cylinder sizes from ø20 to ø63 do not have trunnion mounting female thread. Operate the cylinder within the allowable kinetic energy. Refer to page 311 for details. Note) The values are for standard strokes.

Accessories

Refer to page 309 for part numbers and dimensions.

Mounting		Basic	Axial foot	Flange	Trunnion
Standard	Rod end nut	●	●	●	●
	Single knuckle joint	●	●	●	●
	Double knuckle joint (with pin)*	●	●	●	●
	Pivot bracket	—	—	—	●

* A double knuckle joint pin and retaining rings are shipped together.

Standard Strokes

Bore size	Standard stroke ^{Note 1)}	Maximum manufacturable stroke ^{Note 2)}
20	25, 50, 75, 100, 125, 150, 200	201 to 1500
25	25, 50, 75, 100, 125, 150, 200, 250, 300	301 to 1500
32		
40		
50, 63		

Note 1) Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Note 2) The maximum manufacturable stroke shows the long stroke.

Note 3) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

Mounting Brackets/Part No.

Mounting bracket	Order q'ty	Bore size (mm)						Contents
		20	25	32	40	50	63	
Axial foot	2 ^{Note)}	CG-L020	CG-L025	CG-L032	CG-L040	CG-L050	CG-L063	2 foots, 8 mounting bolts
Flange	1	CG-F020	CG-F025	CG-F032	CG-F040	CG-F050	CG-F063	1 flange, 4 mounting bolts
Trunnion pin	1	CG-T020	CG-T025	CG-T032	CG-T040	CG-T050	CG-T063	2 trunnion pins, 2 trunnion bolts, 2 flat washers
Pivot bracket	1	CG-020-24A	CG-025-24A	CG-032-24A	CG-040-24A	CG-050-24A	CG-063-24A	1 pivot bracket

Note) Order two foots per cylinder.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1


CS2

D-□

-X□

Technical Data

Construction

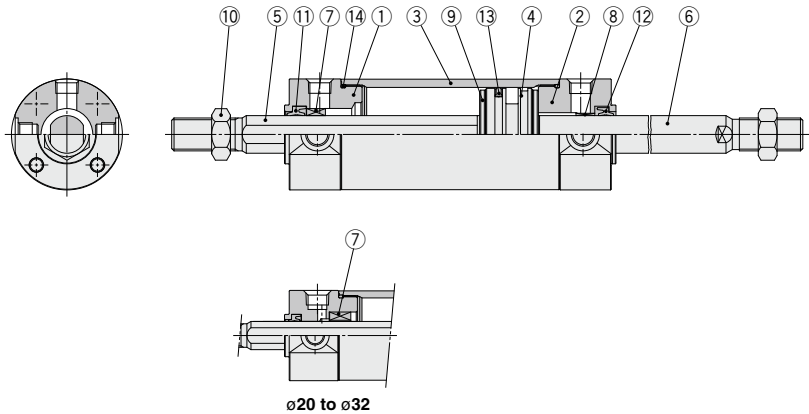

Component Parts

No.	Description	Material	Note
1	Rod cover A	Aluminum alloy	Hard anodized
2	Rod cover B	Aluminum alloy	Hard anodized
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston	Aluminum alloy	
5	Piston rod A	Stainless steel	ø32 or smaller
		Carbon steel*	Hard chrome plating* ø40 or larger
6	Piston rod B	Stainless steel	For ø20 or ø25 with built-in magnet
		Carbon steel**	Hard chrome plating*
7	Non-rotating guide	Bearing alloy	
8	Bushing	Bearing alloy	
9	Bumper	Resin	
10	Rod end nut	Carbon steel	Zinc chromated
11	Rod seal A	NBR	
12	Rod seal B	NBR	
13	Piston seal	NBR	
14	Tube gasket	NBR	


* The material is stainless steel for ø20 to ø32.
** The material for ø20, ø25 cylinders with auto switches is made of stainless steel.
*** For cylinders with auto switches, the magnet is installed in the piston.

Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
20	CG1KWN20Z-PS	Set of the nos. ⑪, ⑫, ⑬, ⑭
25	CG1KWN25Z-PS	
32	CG1KWN32Z-PS	
40	CG1KWN40Z-PS	

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.
Note) Refer to the Specific Product Precautions on page 362-1 for Disassembly/Replacement.
Order with the kit number according to the bore size.
* The seal kit includes a grease pack (10 g).
Order with the following part number when only the grease pack is needed.
Grease pack part number: GR-S-010 (10 g)

Basic with Rubber Bumper: CG1KWB

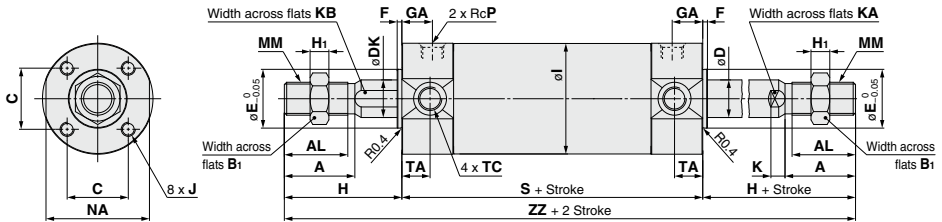

		(mm)																					
Bore size	Stroke range	A	AL	B ₁	C	D	DK	E	F	GA	H ₁	I	J	K	KA	KB	MM	NA	P	S			
20	Up to 1500	18	15.5	13	14	8	9.2	12	2	12	5	26	M4 x 0.7 depth 7	5	6	8	M8 x 1.25	24	1/8	77			
25	Up to 1500	22	19.5	17	16.5	10	11	14	2	12	6	31	M5 x 0.8 depth 7.5	5.5	8	10	M10 x 1.25	29	1/8	77			
32	Up to 1500	22	19.5	17	20	12	12	18	2	12	6	38	M5 x 0.8 depth 8	5.5	10	10	M10 x 1.25	35.5	1/8	79			
40	Up to 1500	30	27	19	26	16	16	25	2	13	8	47	M6 x 1 depth 12	6	14	14	M14 x 1.5	44	1/8	87			
50	Up to 1500	35	32	27	32	20	20	30	2	14	11	58	M8 x 1.25 depth 16	7	18	18	M18 x 1.5	55	1/4	102			
63	Up to 1500	35	32	27	38	20	20	32	2	14	11	72	M10 x 1.5 depth 16	7	18	18	M18 x 1.5	69	1/4	102			

(mm)								
Bore size	TA	TC	H	ZZ				
20	11	M5 x 0.8	35	147				
25	11	M6 x 0.75	40	157				
32	11	M8 x 1.0	40	159				
40	12	M10 x 1.25	50	187				
50	13	M12 x 1.25	58	218				
63	13	M14 x 1.5	58	218				

Note 1) Dimensions are the same as those for the CG1W standard. Refer to pages 316 and 317.

CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

D-□
-X□
 Technical Data

Air Cylinder: Direct Mount Type Double Acting

CG1R Series

ø20, ø25, ø32, ø40, ø50, ø63

RoHS

How to Order

CG1R **N** **25** - **100** **Z** - **□** - **□**

With auto switch **CDG1R** **N** **25** - **100** **Z** - **□** - **M9BW** **□** - **□**

With auto switch (Built-in magnet)

Type

N	Rubber bumper
A	Air cushion

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Cylinder stroke (mm)

Refer to "Standard Strokes" on page 335.

Rod end bracket

Nil	None
V	Single knuckle joint
W	Double knuckle joint

* No bracket is provided for the female rod end.
* Rod end bracket is shipped together with the product, but not assembled.
* A knuckle joint pin is not provided with the single knuckle joint.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
------------	---------------------

* For applicable auto switches, refer to the table below.

Rod end thread

Nil	Male rod end
F	Female rod end

Made to Order

For details, refer to page 335.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.

(Example) CDG1RA32-100Z

* Refer to "Ordering Example of Cylinder Assembly" on page 335.

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load			
					DC	AC	Applicable bore size		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)					
							ø20 to ø63											
							Perpendicular	In-line										
Solid state auto switch	_____	Grommet	Yes	3-wire (NPN) 3-wire (PNP)	24 V	5 V, 12 V	—	M9NV M9PV	M9N M9P	● ●	● ●	● ●	○ ○	○ ○	IC circuit	Relay, PLC		
		Connector		2-wire		12 V		M9BV —	M9B H7C	● ●	● —	○ ●	○ ●	○ —	—			
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN) 3-wire (PNP)	5 V, 12 V	M9NWV M9PWW	M9NW M9PW	● ●	● ●	○ ●	○ ○	○ ○	○ ○	IC circuit				
				2-wire	12 V	M9BWW	M9BW	● ●	● ●	○ ○	○ ○	○ ○	—					
				3-wire (NPN) 3-wire (PNP)	5 V, 12 V	M9NAV ^{*1} M9PAV ^{*1}	M9NA ^{*1} M9PA ^{*1}	○ ○	○ ○	○ ●	○ ○	○ ○	IC circuit					
				2-wire	12 V	M9BAV ^{*1}	M9BA ^{*1}	○ ○	○ ○	○ ○	○ ○	○ ○	—					
	Diagnostic output (2-color indicator)		4-wire (NPN)	5 V, 12 V	—	H7NF	● ●	— ●	○ ○	○ ○	○ ○	IC circuit						
	Reed auto switch	_____	Grommet	Yes	3-wire (Equiv. to NPN)	—	5 V	—	A96V —	A96	● —	— ●	— ●	— —	— —		IC circuit	Relay, PLC
					No		—		100 V	A93V ^{*2}	A93	● ●	● ●	● —	— —		— —	
			Yes	2-wire	24 V	12 V	100 V or less	A90V	A90	● ●	— ●	— ●	— —	— —	IC circuit			
Yes			100 V, 200 V				—	B54	● ●	— ●	● —	— —	— —	—				
Connector		No	200 V or less	—	B64	● ●	— ●	— —	— —	— —	—							
No		—	—	C73C	● ●	— ●	● —	— —	— —	—								
Diagnostic indication (2-color indicator)		Grommet	Yes	24 V or less	—	C80C	● ●	— ●	● —	● —	— —	— —	IC circuit					
				—	—	B59W	● ●	— ●	— —	— —	— —	—						

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.
Please consult with SMC regarding water resistant types with the above model numbers.

*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWLZ
None..... N (Example) H7CN

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 361 for details.

* For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.

* The D-A9□□/M9□□ auto switches are shipped together, (but not assembled). (However, only the auto switch mounting brackets are assembled before shipment.)

The CG1R direct mount cylinder can be installed directly through the use of a square rod cover.


Space-saving has been realized.

Because it is a directly mounted type without using brackets, its overall length is shorter, and its installation pitch can be made smaller. Thus, the space that is required for installation has been dramatically reduced.




Symbol

Rubber bumper



Air cushion



Made to Order

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat resistant cylinder (-10 to 150°C)*2
-XB7	Cold resistant cylinder (-40 to 70°C)*1, *3
-XB9	Low speed cylinder (10 to 50 mm/s)*1, *3
-XB13	Low speed cylinder (5 to 50 mm/s)*1, *3
-XC6	Made of stainless steel
-XC8	Adjustable stroke cylinder/Adjustable extension type*1
-XC9	Adjustable stroke cylinder/Adjustable retraction type*1
-XC13	Auto switch rail mounting*1
-XC20	Head cover axial port*1
-XC22	Fluororubber seal
-XC85	Grease for food processing equipment

*1 Only compatible with cylinders with rubber bumper.

*2 Cylinders with rubber bumper have no bumper.

*3 The shape is the same as the current product.
Use the current seal kit.

Refer to pages 355 to 361 for cylinders with auto switches.

- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Minimum stroke for auto switch mounting
- Auto switch mounting brackets/Part no.
- Operating range
- Cylinder mounting bracket, by stroke/ Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Specifications

Bore size (mm)	20	25	32	40	50	63
Action	Double acting, Single rod					
Lubricant	Not required (Non-lube)					
Fluid	Air					
Proof pressure	1.5 MPa					
Maximum operating pressure	1.0 MPa					
Minimum operating pressure	0.05 MPa					
Ambient and fluid temperature	Without auto switch: -10°C to 70°C (No freezing) With auto switch : -10°C to 60°C					
Piston speed	50 to 1000 mm/s					
Stroke length tolerance	Up to 300 st ^{+1.4} ₀ mm					
Cushion	Rubber bumper, Air cushion					

Standard Strokes

Bore size	Standard stroke* (mm)
20	25, 50, 75, 100, 125, 150
25, 32	25, 50, 75, 100, 125, 150, 200
40, 50, 63	25, 50, 75, 100, 125, 150, 200, 250, 300

* Please consult with SMC for strokes which exceed the standard stroke length.

Note 1) Intermediate strokes not listed above are produced upon receipt of order.

Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Note 2) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

Tightening Torque: Tighten the cylinder mounting bolts with the following tightening torque.


Bore size (mm)	Hexagon socket head cap screw size	Tightening torque (N·m)
20	M5 x 0.8	2.4 to 3.6
25	M6	4.2 to 6.2
32	M8	10.0 to 15.0
40	M10	19.6 to 29.4
50	M12	33.6 to 50.4
63	M16	84.8 to 127.2

Ordering Example of Cylinder Assembly

Cylinder model: CDG1RN20-100Z-W-M9BW

Rod end bracket W: Double knuckle joint
Auto switch D-M9BW: 2 pcs.

* Double knuckle joint and auto switch are shipped together with the product, but not assembled.

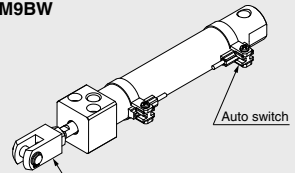

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data

CG1R Series

Weights

Bore size (mm)	20	25	32	40	50	63
Basic weight	0.14	0.23	0.35	0.57	1.04	1.49
Single knuckle joint	0.05	0.09	0.09	0.10	0.22	0.22
Double knuckle joint (with pin)	0.05	0.09	0.09	0.13	0.26	0.26
Additional weight per 50 mm of stroke	0.05	0.07	0.09	0.14	0.21	0.25
Additional weight with air cushion	0	0.01	0.04	0	0.01	0.04
Weight reduction for female rod end	-0.01	-0.02	-0.02	-0.05	-0.10	-0.10

Calculation (Example) **CG1RN32-100Z**
(ø32, 100 stroke)

- Basic weight..... 0.35
 - Additional weight..... 0.09/50 stroke
 - Air cylinder stroke..... 100 stroke
- 0.35 + 0.09 x 100/50 = **0.53 kg**


Accessories

Mounting		Basic
Standard	Rod end nut	●
Option	Single knuckle joint	●
	Double knuckle joint* (with pin)	●


- * A double knuckle joint pin and retaining rings are shipped together.
- * Refer to page 309 for part numbers and dimensions of the accessories.

Construction

With rubber bumper

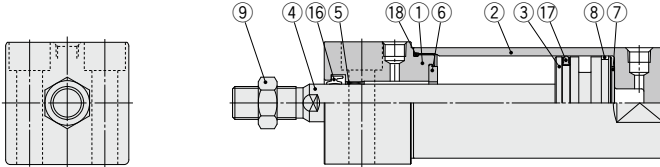

With air cushion

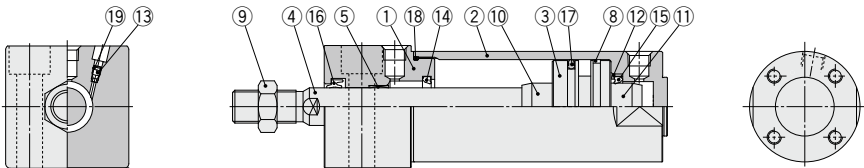

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Hard anodized
2	Tube cover	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel	For ø20 or ø25 with built-in magnet
		Carbon steel*	Hard chrome plating*
5	Bushing	Bearing alloy	
6	Bumper	Resin	ø32 or larger is common.
7	Bumper	Resin	
8	Wear ring	Resin	
9	Rod end nut	Carbon steel	Zinc chromated
10	Cushion ring A	Aluminum alloy	

No.	Description	Material	Note
11	Cushion ring B	Aluminum alloy	
12	Seal retainer	Rolled steel	Zinc chromated
13	Cushion valve	Carbon steel	Electroless nickel plating
		Steel wire	Zinc chromated
14	Cushion seal A	Urethane	ø32 or larger is common.
15	Cushion seal B	Urethane	
16	Rod seal	NBR	
17	Piston seal	NBR	
18	Tube gasket	NBR	
19	Valve seal	NBR	

Note) For cylinders with auto switches, the magnet is installed in the piston.
* The material for ø20, ø25 cylinders with auto switches is made of stainless steel.

Replacement parts/Seal kit are the same as standard type, double acting, single rod. Refer to page 298.

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.

Note) Refer to the Specific Product Precautions on page 362-1 for Disassembly/Replacement.


CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

D-□
-X□
Technical Data



CG1R Series

Basic with Bottom Mounting


With rubber bumper

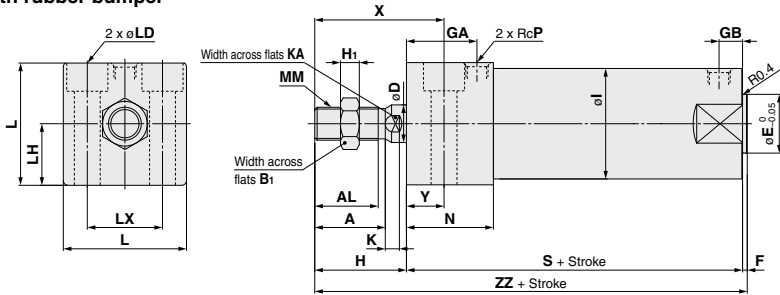

With air cushion

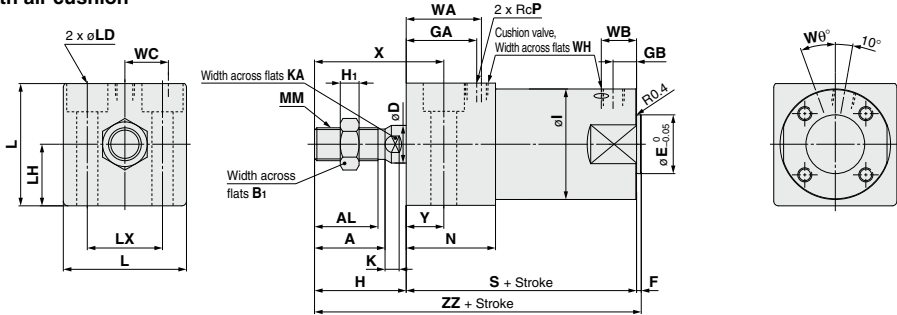

Female rod end

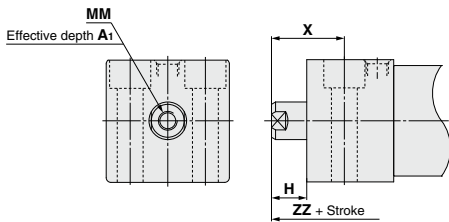

		(mm)																								
Bore size	Stroke range	A	AL	B ₁	D	E	F	GA	GB	H	H ₁	I	K	KA	L	LD		LH	LX	MM	N	P	S	X	Y	ZZ
20	Up to 150	18	15.5	13	8	12	2	20	10	27	5	26	5	6	30.4	ø5.5, ø9.5 depth of counterbore 6		15	18	M8 x 1.25	27	1/8	75	38	11	104
25	Up to 200	22	19.5	17	10	14	2	22	10	32	6	31	5.5	8	36.4	ø6.6, ø11 depth of counterbore 7		18	22	M10 x 1.25	29	1/8	77	44	12	111
32	Up to 200	22	19.5	17	12	18	2	26	10	32	6	38	5.5	10	42.4	ø9, ø14 depth of counterbore 9		21	24	M10 x 1.25	33	1/8	83	45	13	117
40	Up to 300	30	27	19	16	25	2	30	10	39	8	47	6	14	52.4	ø11, ø17.5 depth of counterbore 12		26	32	M14 x 1.5	37	1/8	94	55	16	135
50	Up to 300	35	32	27	20	30	2	33	12	45	11	58	7	18	64.5	ø14, ø20 depth of counterbore 14		32	41	M18 x 1.5	44	1/4	108	62	17	155
63	Up to 300	35	32	27	20	32	2	39	12	45	11	72	7	18	76.6	ø18, ø26 depth of counterbore 18		38	46	M18 x 1.5	50	1/4	114	64	19	161

With Air Cushion

Bore size	Stroke range	P	WA	WB	WC	WD	Wθ	WH
20	Up to 150	M5 x 0.8	22	15	5.5	2	25°	1.5
25	Up to 200	M5 x 0.8	24	14.5	7	2	25°	1.5
32	Up to 200	Rc1/8	28	14	11.5	—	25°	1.5
40	Up to 300	Rc1/8	32	15	15	—	20°	1.5
50	Up to 300	Rc1/4	36	16	17.5	—	20°	3
63	Up to 300	Rc1/4	42	17	20.5	—	20°	3

Female Rod End

Bore size	A ₁	H	MM	X	ZZ
20	8	13	M4 x 0.7	24	90
25	8	14	M5 x 0.8	26	93
32	12	14	M6 x 1	27	99
40	13	15	M8 x 1.25	31	111
50	18	16	M10 x 1.5	33	126
63	18	16	M10 x 1.5	35	132


Air Cylinder: Direct Mount, Non-rotating Rod Type

CG1KR Series

ø20, ø25, ø32, ø40, ø50, ø63

RoHS

How to Order

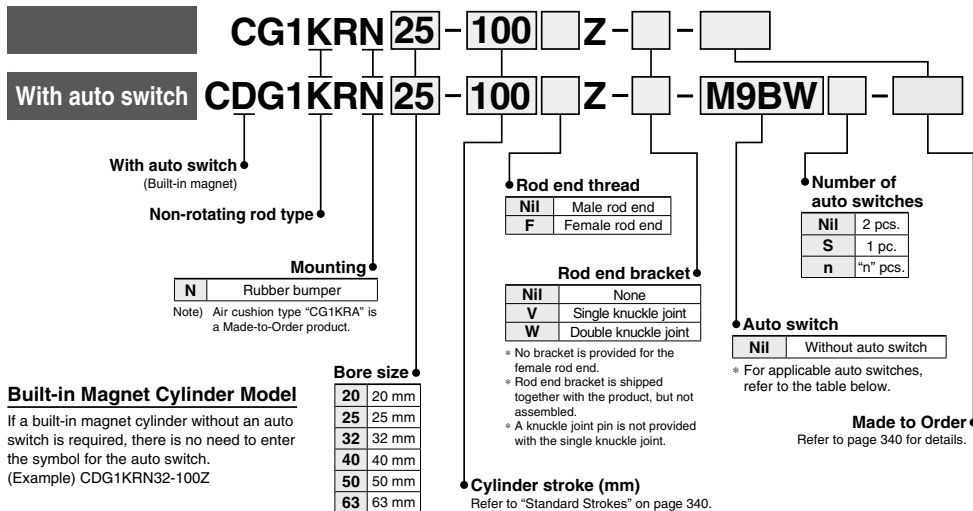

Applicable Auto Switches

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load				
					DC	AC	Applicable bore size		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)						
							Perpendicular	In-line											
Solid state auto switch	—	Grommet	—	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	—	○	IC circuit	Relay, PLC		
				3-wire (PNP)				M9PV	M9P	●	●	●	○	—	○				
		Connector	2-wire	12 V				M9BV	M9B	●	●	●	○	—	○			—	
			—	H7C				●	—	●	●	●	—	—					
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	5 V, 12 V	M9NVV	M9NW	●	●	●	○	—	○	IC circuit					
				3-wire (PNP)		M9PVV	M9PW	●	●	●	○	—	○		—				
	2-wire			12 V	M9BWV	M9BW	●	●	●	○	—	○	—						
	3-wire (NPN)			5 V, 12 V	M9NAV ^{*1}	M9NA ^{*1}	○	○	○	○	—	○	IC circuit						
	3-wire (PNP)				M9PAV ^{*1}	M9PA ^{*1}	○	○	○	○	—	○		—					
	Water resistant (2-color indicator)			2-wire	12 V	M9BAV ^{*1}	M9BA ^{*1}	○	○	○	○	—	○	—					
Diagnostic output (2-color indicator)		4-wire (NPN)	5 V, 12 V	—	H7NF	●	—	●	○	—	○	IC circuit							
Reed auto switch	—	Grommet	Yes	3-wire (Equiv. to NPN)	24 V	5 V	—	A96V	A96	●	—	●	—	—	—	IC circuit	Relay, PLC		
				—				100 V	A93V ^{*2}	A93	●	●	●	●	—	—		—	
				No				100 V or less	A90V	A90	●	—	●	—	—	—		—	IC circuit
				Yes				100 V, 200 V	—	B54	●	—	●	—	—	—		—	
		Connector	No	200 V or less	—	B64	●	—	●	—	—	—	—						
			No	—	—	C73C	●	—	●	●	●	—	—						
	Diagnostic indication (2-color indicator)	Grommet	No	24 V or less	—	C80C	●	—	●	●	●	—	—	IC circuit					
				—	—	—	B59W	●	—	●	—	—	—						

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Please consult with SMC regarding water resistant types with the above model numbers.

*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m Nil (Example) M9NV
1 m M (Example) M9NVV
3 m L (Example) M9NVW
5 m Z (Example) M9NVZ
None N (Example) H7CN

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 361 for details.

* For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.

* The D-A93□/M9□□□ auto switches are shipped together, (but not assembled). (However, only auto switch mounting brackets are assembled before shipment.)



CG1KR Series


**CG1KR series direct mount,
non-rotating rod type cylinder
can be installed directly through
the use of a square rod cover.**

Space-saving has been realized.

Because it is a directly mounted type without using brackets, its overall length is shorter, and its installation pitch can be made smaller. Thus, the space that is required for installation has been dramatically reduced.



Symbol Rubber bumper



Made to Order
[Click here for details](#)

Symbol	Specifications
-XC8	Adjustable stroke cylinder/Adjustable extension type*1
-XC9	Adjustable stroke cylinder/Adjustable retraction type*1
-XC20	Head cover axial port

*1 The shape is the same as the current product.
Use the current seal kit.

Accessories

	Mounting	Basic
Standard	Rod end nut	●
Option	Single knuckle joint	●
	Double knuckle joint* (with pin)	●

* A double knuckle joint pin and retaining rings are shipped together.
* Refer to page 309 for part numbers and dimensions of the accessories.

Refer to pages 355 to 361 for cylinders with auto switches.

- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Minimum stroke for auto switch mounting
- Auto switch mounting brackets/Part no.
- Operating range
- Cylinder mounting bracket, by stroke/ Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Specifications

Bore size (mm)	20	25	32	40	50	63
Action	Double acting, Single rod					
Lubricant	Not required (Non-lube)					
Fluid	Air					
Proof pressure	1.5 MPa					
Maximum operating pressure	1.0 MPa					
Minimum operating pressure	0.05 MPa					
Ambient and fluid temperature	Without auto switch: -10°C to 70°C (No freezing) With auto switch : -10°C to 60°C					
Piston speed	50 to 500 mm/s					
Stroke length tolerance	Up to 300 st ^{+1.4} ₀ mm					
Cushion	Rubber bumper					
Rod non-rotating accuracy	±1°		±0.8°		±0.5°	

Weights

Bore size (mm)	20	25	32	40	50	63
Basic weight	0.14	0.24	0.35	0.56	1.04	1.48
Single knuckle joint	0.05	0.09	0.09	0.10	0.22	0.22
Double knuckle joint (with pin)	0.05	0.09	0.09	0.13	0.26	0.26
Additional weight per 50 mm of stroke	0.05	0.07	0.09	0.15	0.22	0.26
Weight reduction for female rod end	-0.01	-0.02	-0.02	-0.05	-0.10	-0.10

Calculation (Example) **CG1KRN32-100Z**
(ø32, 100 stroke)

- Basic weight..... 0.35
- Additional weight..... 0.09/50 stroke
- Air cylinder stroke..... 100 stroke

$$0.35 + 0.09 \times 100/50 = 0.53 \text{ kg}$$

Standard Strokes

Bore size	Standard stroke* (mm)
20	25, 50, 75, 100, 125, 150
25, 32	25, 50, 75, 100, 125, 150, 200
40, 50, 63	25, 50, 75, 100, 125, 150, 200, 250, 300

* Please consult with SMC for strokes which exceed the standard stroke length.
Note 1) Intermediate strokes not listed above are produced upon receipt of order.
Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)
Note 2) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

Tightening Torque: Tighten the cylinder mounting bolts with the following tightening torque.


Bore size (mm)	Hexagon socket head cap screw size	Tightening torque (N·m)
20	M5 x 0.8	2.4 to 3.6
25	M6	4.2 to 6.2
32	M8	10.0 to 15.0
40	M10	19.6 to 29.4
50	M12	33.6 to 50.4
63	M16	84.8 to 127.2

Ordering Example of Cylinder Assembly

Cylinder model: **CDG1KRN20-100Z-W-M9BW**


Rod end bracket W: Double knuckle joint
Auto switch D-M9BW: 2 pcs.

* Double knuckle joint and auto switch are shipped together with the product, but not assembled.

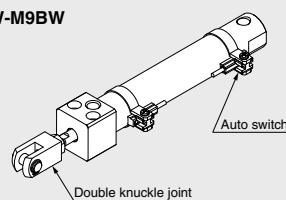

Construction

Non-rotating rod type/ Bottom mounting type

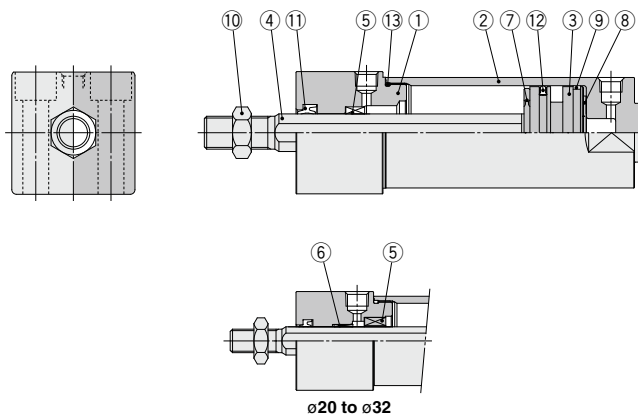

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear hard anodized
2	Tube cover	Aluminum alloy	Clear hard anodized
3	Piston	Aluminum alloy	
4	Piston rod	ø20 to ø32 Stainless steel	
		ø40 to ø63 Carbon steel	Hard chrome plating
5	Non-rotating guide	Oil-impregnated sintered alloy	
6	Bushing	Oil-impregnated sintered alloy	ø20 to ø32 only
7	Bumper	Resin	
8	Bumper	Resin	
9	Wear ring	Resin	
10	Rod end nut	Rolled steel	Zinc chromated
11	Rod seal	NBR	
12	Piston seal	NBR	
13	Tube gasket	NBR	

Replacement parts/Seal kit are the same as double acting, non-rotating rod type. Refer to page 328.

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.

Note) Refer to the Specific Product Precautions on page 362-1 for Disassembly/Replacement.

CG1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□


-X□

Technical
Data


CG1KR Series

Basic with Bottom Mounting: CG1KRN

With rubber bumper

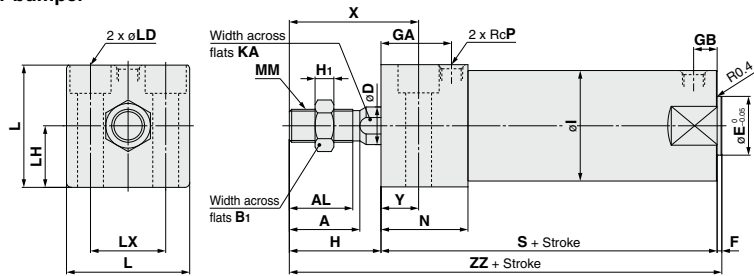

Female rod end

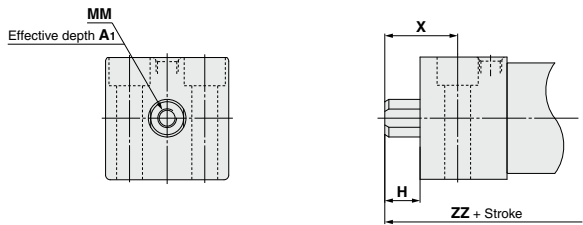

Female Rod End (mm)

Bore size (mm)	A ₁	H	MM	X	ZZ
20	8	13	M4 x 0.7	24	90
25	8	14	M5 x 0.8	26	93
32	12	14	M6 x 1	27	99
40	13	15	M8 x 1.25	31	111
50	18	16	M10 x 1.5	33	126
63	18	16	M10 x 1.5	35	132

Bore size (mm)	Stroke range (mm)	A	AL	B ₁	D	E	F	GA	GB	H	H ₁	I	KA	L	LD	LH	LX	MM	N	P	S	X	Y	ZZ
20	Up to 150	18	15.5	13	9.2	12	2	20	10	27	5	26	8	30.4	ø5.5, ø9.5 depth of counterbore 6	15	18	M8 x 1.25	27	1/8	75	38	11	104
25	Up to 200	22	19.5	17	11	14	2	22	10	32	6	31	10	36.4	ø6.6, ø11 depth of counterbore 7	18	22	M10 x 1.25	29	1/8	77	44	12	111
32	Up to 200	22	19.5	17	12	18	2	26	10	32	6	38	10	42.4	ø9, ø14 depth of counterbore 9	21	24	M10 x 1.25	33	1/8	83	45	13	117
40	Up to 300	30	27	19	16	25	2	30	10	39	8	47	14	52.4	ø11, ø17.5 depth of counterbore 12	26	32	M14 x 1.5	37	1/8	94	55	16	135
50	Up to 300	35	32	27	20	30	2	33	12	45	11	58	18	64.5	ø14, ø20 depth of counterbore 14	32	41	M18 x 1.5	44	1/4	108	62	17	155
63	Up to 300	35	32	27	20	32	2	39	12	45	11	72	18	76.6	ø18, ø26 depth of counterbore 18	38	46	M18 x 1.5	50	1/4	114	64	19	161


Auto switch mounting position is the same as that on page 357.

Air Cylinder: With End Lock

CBG1 Series

ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

How to Order

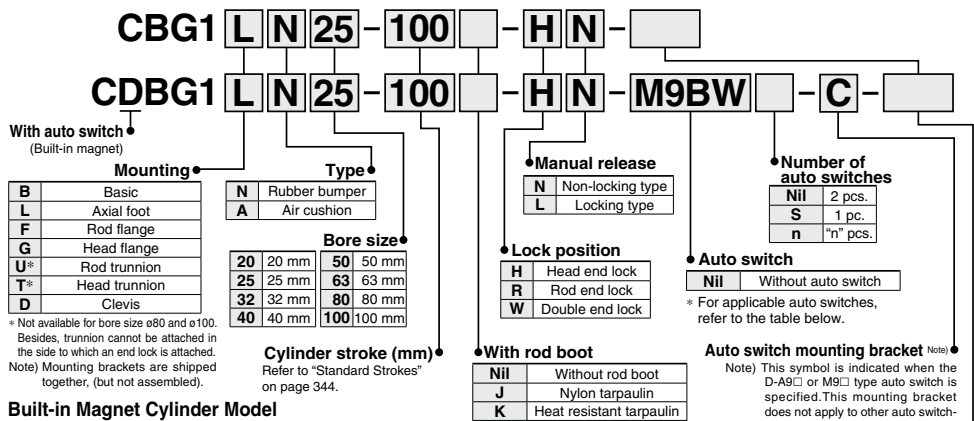

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch. (Example) CDBG1FA32-100-RL

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)				Pre-wired connector	Applicable load			
					DC	AC	Applicable bore size			0.5 (Nil)	1 (M)	3 (L)	5 (Z)				None (N)	
							ø20 to ø63	ø80, ø100										
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9NV	M9N	●	●	○	—	○	IC circuit	Relay, PLC			
				3-wire (PNP)			M9PV	M9P	●	●	○	—	○					
		Connector		2-wire			12 V	M9BV	M9B	●	●	○	—			○		
				—				—	H7C	●	●	○	●			—		
	Diagnostic indication (2-color indicator)	Grommet		3-wire (NPN)	24 V		5 V, 12 V	M9NVW	M9NW	●	●	○	—	○		IC circuit		
				3-wire (PNP)				M9PWV	M9PW	●	●	○	—	○				
		Water resistant (2-color indicator)		2-wire				12 V	M9BWV	M9BW	●	●	○	—			○	—
				—					—	K59W	●	●	○	—			○	
	Reed auto switch	—		Grommet	Yes		3-wire (NPN)	24 V	12 V	M9NAV ^{*1}	M9NA ^{*1}	○	○	○		—	○	IC circuit
							3-wire (PNP)			M9PAV ^{*1}	M9PA ^{*1}	○	○	●		○	○	
2-wire			M9BAV ^{*1}			M9BA ^{*1}	○			○	●	○	○	—				
—			—			G5BA ^{*1}	●			●	○	—	○					
Diagnostic indication (2-color indicator)			Grommet	4-wire (NPN)		—	H7NF			●	●	○	—	○	IC circuit			
				3-wire (Equip. to NPN)		5 V	A96V			A96	●	●	○	—	○	IC circuit		
				—		100 V	A93V ^{*2}			A93	●	●	○	—	○	—		
				—		100 V or less	A90V			A90	●	●	○	—	○	IC circuit		
—	Connector	Yes	2-wire	24 V	12 V	—	—	B54	●	●	●	—	—	Relay, PLC				
						—	—	B64	●	●	○	—			○			
						—	—	C73C	●	●	●	●			—	○		
						—	24 V or less	C80C	●	●	●	●			—	○	IC circuit	
—	Grommet	Yes	—	—	—	—	—	B59W	●	●	○	—	—					

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Please consult with SMC regarding water resistant types with the above model numbers.

*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m Nil (Example) M9NW 5 m Z (Example) M9NWZ
1 m M (Example) M9NWM None N (Example) H7CN

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 361 for details.

* For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.

* The D-A9□/M9□□□ auto switches are shipped together, (but not assembled). (However, only auto switch mounting brackets are assembled before shipment.)

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data


CBG1 Series



Symbol

Rubber bumper

Air cushion

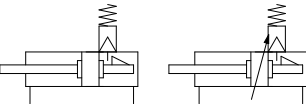

Made to Order
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC13	Auto switch rail mounting

Refer to pages 355 to 361 for cylinders with auto switches.

- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Minimum stroke for auto switch mounting
- Auto switch mounting brackets/Part no.
- Operating range
- Cylinder mounting bracket, by stroke/ Auto switch mounting surfaces



Precautions

Refer to page 362-1 before handling.

Specifications

Bore size (mm)	20	25	32	40	50	63	80	100
Action	Double acting, Single rod							
Lubricant	Not required (Non-lube)							
Fluid	Air							
Proof pressure	1.5 MPa							
Maximum operating pressure	1.0 MPa							
Minimum operating pressure	0.15 MPa*							
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)							
Piston speed	50 to 1000 mm/s						50 to 700 mm/s	
Stroke length tolerance	Up to 1000 ^{+1.4} ₀ mm, Up to 1200 ^{+1.8} ₀ mm						Up to 1000 ^{+1.4} ₀ mm Up to 1500 ^{+1.8} ₀ mm	
Cushion	Rubber bumper, Air cushion							
Mounting**	Basic, Axial foot, Rod flange, Head flange, Rod trunnion, Head trunnion, Clevis							

* 0.05 MPa except locking parts.

** Rod/Head trunnion types are not available for ø80 and ø100.

Trunnion is not attached for a cover on which lock mechanism is equipped.

Lock Specifications

Lock position	Head end, Rod end, Double end							
Holding force (Max.) (N)	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
	215	330	550	860	1340	2140	3450	5390
Backlash	2 mm or less							
Manual release	Non-locking type, Locking type							

Adjust the switch position so that it operates upon movement to both the stroke end and backlash (2 mm) positions.

Standard Strokes

Bore size (mm)	Standard stroke (mm) ^{Note 1)}	Long stroke (mm)	Maximum manufacturable stroke (mm)
20	25, 50, 75, 100, 125, 150, 200	201 to 350	1500
25		301 to 400	
32		301 to 450	
40		301 to 800	
50, 63		301 to 1200	
80		301 to 1400	
100		301 to 1500	

Note 1) Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)
Note 2) Long stroke applies to the axial foot and rod flange types.

If other mounting brackets are used, or the length exceeds the long stroke limit, refer to "Air Cylinders Model Selection" on front matter pages.

Rod Boot Material

Symbol	Rod boot material	Maximum operating temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

* Maximum ambient temperature for the rod boot itself.

Accessories


Mounting		Basic
Standard	Rod end nut	●
	Single knuckle joint	●
	Double knuckle joint* (with pin)	●
	Pivot bracket	●

* A double knuckle joint pin and retaining rings are shipped together.


* Refer to page 309 for part numbers and dimensions of the accessories.

Construction: With Rubber Bumper

Head end lock

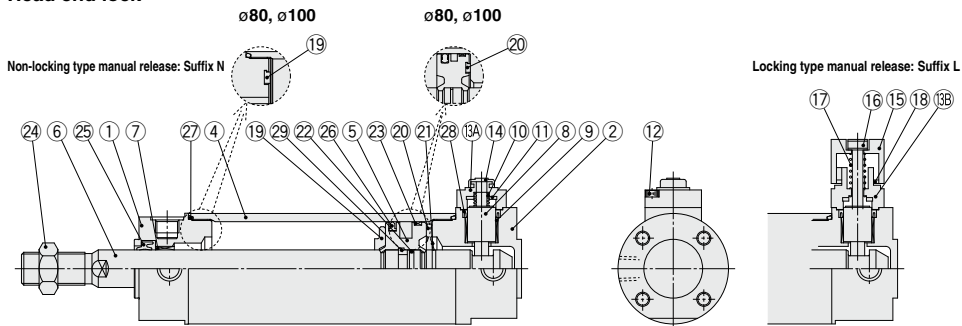

Rod end lock

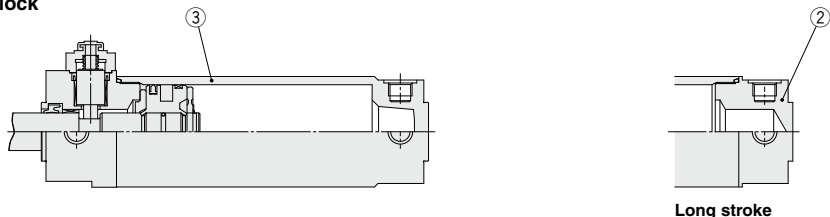

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Hard anodized
2	Head cover	Aluminum alloy	Hard anodized
3	Tube cover	Aluminum alloy	Hard anodized
4	Cylinder tube	Aluminum alloy	Hard anodized
5	Piston	Aluminum alloy	Chromated
6	Piston rod	Carbon steel*	Hard chrome plating*
7	Bushing	Bearing alloy	
8	Lock piston	Carbon steel	Hard chrome plating, Heat treated
9	Lock bushing	Copper alloy	
10	Lock spring	Stainless steel	
11	Bumper	Resin	
12	Hexagon socket head cap screw	Alloy steel	Black zinc chromated
13A	Cap A	Aluminum die-casted	Black painted
13B	Cap B	Carbon steel	Oxide film treated
14	Rubber cap	Synthetic rubber	

Note) For cylinders with auto switches, the magnet is installed in the piston.

* The material for ø20, ø25 cylinders with auto switches is made of stainless steel.

Replacement Parts: Seal Kit (With one end lock)

Series	Bore size (mm)	Kit no.	Contents
CBG1□N Rubber bumper type	20	CBG1N20-PS	Set of the nos. 25, 26, 27, 28 and grease pack
	25	CBG1N25-PS	
	32	CBG1N32-PS	
	40	CBG1N40-PS	

Order seal kit in accordance with the bore size.

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.

* The seal kit includes a grease pack (10 g). Order with the following part number when only the grease pack is needed.

Grease pack part number: GR-S-010 (10 g)

No.	Description	Material	Note
15	M/O knob	Zinc die-casted	Black painted
16	M/O bolt	Alloy steel	Black zinc chromated, Red painted
17	M/O spring	Steel wire	Zinc chromated
18	Stopper ring	Carbon steel	Zinc chromated
19	Bumper A	Resin	
20	Bumper B	Resin	ø40 or larger: Same as bumper A
21	Retaining ring	Stainless steel	Not available for ø80, ø100
22	Piston gasket	NBR	
23	Wear ring	Resin	
24	Rod end nut	Carbon steel	Zinc chromated
25	Rod seal	NBR	
26	Piston seal	NBR	
27	Cylinder tube gasket	NBR	1 pc. when using tube cover
28	Lock piston seal	NBR	2 pcs. for double end lock
29	Piston holder	Resin	ø40 to ø100, head end lock only

Replacement Parts: Seal Kit (With double end lock)

Series	Bore size (mm)	Kit no.	Contents
CBG1□N Rubber bumper type	20	CBG1N20-PS-W	Set of the nos. 25, 26, 27, 28 and grease pack
	25	CBG1N25-PS-W	
	32	CBG1N32-PS-W	
	40	CBG1N40-PS-W	

Order seal kit in accordance with the bore size.

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.

* The seal kit includes a grease pack (10 g). Order with the following part number when only the grease pack is needed.

Grease pack part number: GR-S-010 (10 g)


CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

CBG1 Series


Construction: With Air Cushion

With air cushion
Head end lock

Non-locking type manual release: Suffix N

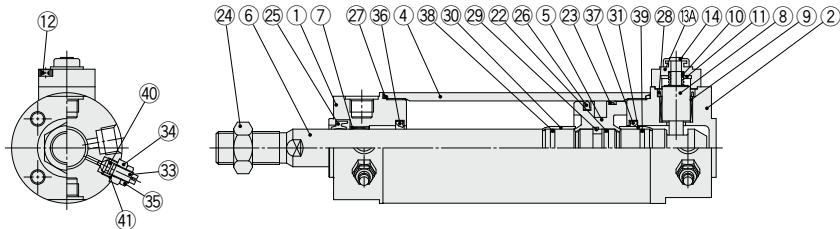

Rod end lock

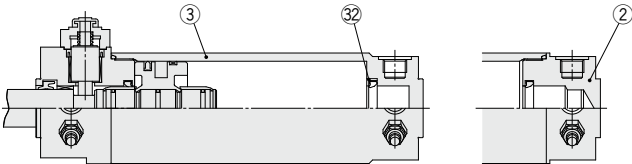

Long stroke

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Hard anodized
2	Head cover	Aluminum alloy	Hard anodized
3	Tube cover	Aluminum alloy	Hard anodized
4	Cylinder tube	Aluminum alloy	Hard anodized
5	Piston	Aluminum alloy	Chromated
6	Piston rod	Carbon steel*	Hard chrome plating*
7	Bushing	Bearing alloy	
8	Lock piston	Carbon steel	Hard chrome plating, Heat treated
9	Lock bushing	Copper alloy	
10	Lock spring	Stainless steel	
11	Bumper	Resin	
12	Hexagon socket head cap screw	Alloy steel	Black zinc chromated
13A	Cap A	Aluminum die-casted	Black painted
13B	Cap B	Carbon steel	Oxide film treated
14	Rubber cap	Synthetic rubber	
15	M/O knob	Zinc die-casted	Black painted
16	M/O bolt	Alloy steel	Black zinc chromated, Red painted
17	M/O spring	Steel wire	Zinc chromated
18	Stopper ring	Carbon steel	Zinc chromated

Note) For cylinders with auto switches, the magnet is installed in the piston.
* The material for ø20, ø25 cylinders with auto switches is made of stainless steel.

Replacement Parts: Seal Kit (With one end lock)

Series	Bore size (mm)	Kit no.	Contents
CBG1□A Air cushion type	20	CBG1A20-PS	Set of the nos. (25, 26, 27, 28, 40, 41) and grease pack
	25	CBG1A25-PS	
	32	CBG1A32-PS	
	40	CBG1A40-PS	

Order seal kit in accordance with the bore size.

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.
* The seal kit includes a grease pack (10 g). Order with the following part number when only the grease pack is needed.
Grease pack part number: GR-S-010 (10 g)

No.	Description	Material	Note
22	Piston gasket	NBR	
23	Wear ring	Resin	
24	Rod end nut	Carbon steel	Zinc chromated
25	Rod seal	NBR	
26	Piston seal	NBR	
27	Cylinder tube gasket	NBR	1 pc. when using tube cover
28	Lock piston seal	NBR	2 pcs. for double end lock
29	Piston holder	Resin	ø40 to ø100 only
30	Cushion ring A	Aluminum alloy	Anodized
31	Cushion ring B	Aluminum alloy	Anodized
32	Seal retainer	Rolled steel	Only when using nickel plating, tube cover
33	Cushion valve	Rolled steel	Electroless nickel plating
34	Valve retainer	Rolled steel	Electroless nickel plating
35	Lock nut	Rolled steel	Nickel plating
36	Cushion seal A	Urethane	
37	Cushion seal B	Urethane	ø32 or larger: Same as A
38	Cushion ring gasket A	NBR	
39	Cushion ring gasket B	NBR	ø32 or larger: Same as A
40	Valve seal	NBR	
41	Valve retaining gasket	NBR	

Replacement Parts: Seal Kit (With double end lock)


Series	Bore size (mm)	Kit no.	Contents
CBG1□A Air cushion type	20	CBG1A20-PS-W	Set of the nos. (25, 26, 27, 28, 40, 41) and grease pack
	25	CBG1A25-PS-W	
	32	CBG1A32-PS-W	
	40	CBG1A40-PS-W	

Order seal kit in accordance with the bore size.

Note) As sizes ø50 and larger cannot be disassembled, the seal cannot be replaced.
* The seal kit includes a grease pack (10 g). Order with the following part number when only the grease pack is needed.
Grease pack part number: GR-S-010 (10 g)


Basic with Rubber Bumper: CBG1BN

Head end lock: CBG1BN Bore size — Stroke — H□

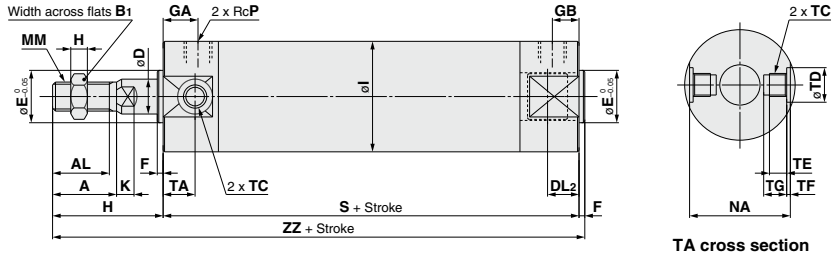

Non-locking type manual release: Suffix N

Locking type manual release: Suffix L

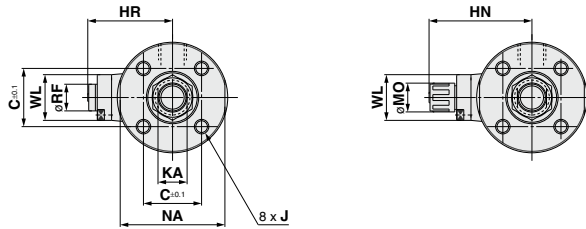

Bore size (mm)	Stroke range	A	AL	B ₁	C	D	DL ₂	E	F	GA	GB	H	H ₁	HR	HN (Max.)	I	J
20	Up to 350	18	15.5	13	14	8	12.5	12	2	12	12	35	5	25.3	37	26	M4 x 0.7 depth 7
25	Up to 400	22	19.5	17	16.5	10	12.5	14	2	12	12	40	6	28.3	40	31	M5 x 0.8 depth 7.5
32	Up to 450	22	19.5	17	20	12	12	18	2	12	12	40	6	31.3	43	38	M5 x 0.8 depth 8
40	Up to 800	30	27	19	26	16	15	25	2	13	13	50	8	38.3	52.5	47	M6 x 1 depth 12
50	Up to 1200	35	32	27	32	20	16.5	30	2	14	14	58	11	44.5	58.5	58	M8 x 1.25 depth 16
63	Up to 1200	35	32	27	38	20	16.5	32	2	14	14	58	11	45	59	72	M10 x 1.5 depth 16
80	Up to 1400	40	37	32	50	25	19	40	3	20	20	71	13	53.5	68	89	M10 x 1.5 depth 22
100	Up to 1500	40	37	41	60	30	20	50	3	20	20	71	16	64.5	79	110	M12 x 1.75 depth 22

Bore size (mm)	K	KA	MM	MO	NA	P	RF	S	TA	TC	TD	TE	TF	TG	WL	ZZ
20	5	6	M8 x 1.25	15	24	1/8	11	81	11	M5 x 0.8	8 ^{+0.08} ₀	4	0.5	5.5	15	118
25	5.5	8	M10 x 1.25	15	29	1/8	11	81	11	M6 x 0.75	10 ^{+0.08} ₀	5	1	6.5	15	123
32	5.5	10	M10 x 1.25	15	35.5	1/8	11	81	11	M6 x 1.0	12 ^{+0.08} ₀	5.5	1	7.5	24	123
40	6	14	M14 x 1.5	19	44	1/8	11	92	12	M10 x 1.25	14 ^{+0.08} ₀	6	1.25	8.5	24	144
50	7	18	M18 x 1.5	19	55	1/4	11	107	13	M12 x 1.25	16 ^{+0.08} ₀	7.5	2	10	24	167
63	7	18	M18 x 1.5	19	69	1/4	11	107	13	M14 x 1.5	18 ^{+0.08} ₀	11.5	3	14.5	24	167
80	10	22	M22 x 1.5	23	80	3/8	21	130	—	—	—	—	—	—	40	204
100	10	26	M26 x 1.5	23	100	1/2	21	130	—	—	—	—	—	—	40	204


CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2

D-□
-X□
 Technical Data

CBG1 Series

Basic with Rubber Bumper: CBG1BN


Rod end lock: CBG1BN Bore size — Stroke — R

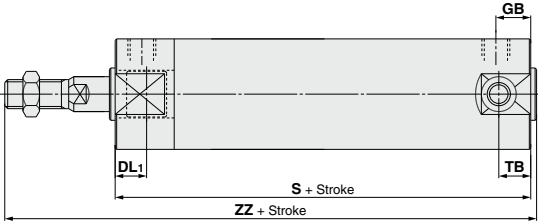

(mm)					
Bore size (mm)	DL1	GB	S	TB	ZZ
20	19.5	10 (12)	80 (88)	11	117 (125)
25	19.5	10 (12)	80 (88)	11	122 (130)
32	20	10 (12)	81 (89)	10 (11)	123 (131)
40	19	10 (13)	87 (96)	10 (12)	139 (148)
50	23.5	12 (14)	102 (114)	12 (13)	162 (174)
63	23.5	12 (14)	102 (114)	12 (13)	162 (174)
80	27	16 (20)	124 (138)	—	198 (212)
100	30	16 (20)	124 (138)	—	198 (212)


* () : Denotes the dimensions for long stroke.

Double end lock: CBG1BN Bore size — Stroke — W

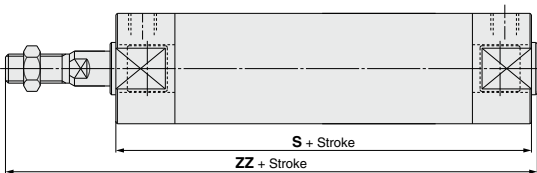

(mm)		
Bore size (mm)	S	ZZ
20	92	129
25	92	134
32	91	133
40	101	153
50	119	179
63	119	179
80	146	220
100	146	220

With rod boot

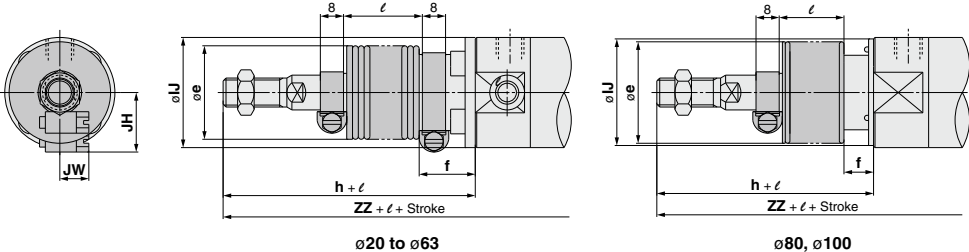


(mm)										
Bore size (mm)	e	f	h	JJ	JH (Reference)	JW (Reference)	ℓ	Head end lock: -H□	Rod end lock: -R□	Double end lock: -W□
20	30	18	55	27	15.5	10.5	1/4 stroke	ZZ	ZZ	ZZ
25	30	19	62	32	16.5	10.5		138	137 (145)	149
32	35	19	62	38	18.5	10.5		145	144 (152)	156
40	35	19	70	48	21.5	10.5		145	145 (153)	155
50	40	19	78	59	24	10.5		164	159 (168)	173
63	40	20	78	72	24	10.5		187	182 (194)	199
80	52	10	80	59	—	—		187	182 (194)	199
100	62	7	80	71	—	—		213	207 (221)	229
								213	207 (221)	229

* () : Denotes the dimensions for long strokes.
** The minimum stroke with rod boot is 20 mm.

Basic with Air Cushion: CBG1BA

Head end lock: CBG1BA Bore size — Stroke — H ☐
Rod end lock: CBG1BA Bore size — Stroke — R ☐

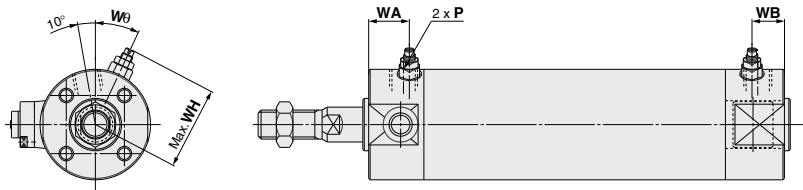

Head End Lock: -H ☐ (mm)

Bore size (mm)	P	WA	WB	WH	Wθ
20	M5 x 0.8	16	16	23	30°
25	M5 x 0.8	16	16	25	30°
32	Rc1/8	16	16	28.5	25°
40	Rc1/8	16	16	33	20°
50	Rc1/4	18	18	40.5	20°
63	Rc1/4	18	18	47.5	20°
80	Rc3/8	22	22	60.5	20°
100	Rc1/2	22	22	71	20°

* For dimensions other than listed above, refer to the dimensions with rubber bumper.

Rod End Lock: -R ☐ (mm)

Bore size (mm)	P	WA	WB	WH	Wθ
20	M5 x 0.8	16	15 (16)	23	30°
25	M5 x 0.8	16	15 (16)	25	30°
32	Rc1/8	16	15 (16)	28.5	25°
40	Rc1/8	16	15 (16)	33	20°
50	Rc1/4	18	17 (18)	40.5	20°
63	Rc1/4	18	17 (18)	47.5	20°
80	Rc3/8	22	22	60.5	20°
100	Rc1/2	22	22	71	20°

* () : Denotes the dimensions for long strokes.
** For dimensions other than the listed above, refer to the dimensions with rubber bumper.

CG1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D- ☐

-X ☐


Technical
Data

CBG1 Series

With Mounting Bracket

(For dimensions other than listed below, refer to pages 347 to 349, 301 to 303.)

Axial foot: CBG1L□

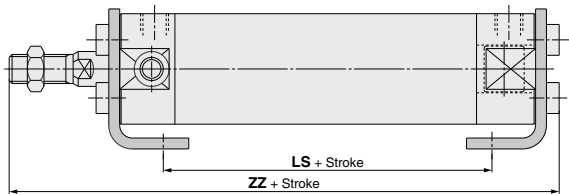


(mm)


Bore size (mm)	Head end lock: -H□			Rod end lock: -R□			Double end lock: -W□		
	LS	ZZ		LS	ZZ		LS	ZZ	
	—	Without rod boot	With rod boot	—	Without rod boot	With rod boot	—	Without rod boot	With rod boot
20	57	122	142 + ℓ	56 (64)	121 (129)	141 (149) + ℓ	68	133	153 + ℓ
25	57	127.5	149.5 + ℓ	56 (64)	126.5 (134.5)	148.5 (156.5) + ℓ	68	138.5	160.5 + ℓ
32	55	127.5	149.5 + ℓ	55 (63)	127.5 (135.5)	149.5 (157.5) + ℓ	65	137.5	159.5 + ℓ
40	65	149	169 + ℓ	60 (69)	144 (153)	164 (173) + ℓ	74	158	178 + ℓ
50	72	174.5	194.5 + ℓ	67 (79)	169.5 (181.5)	189.5 (201.5) + ℓ	84	186.5	206.5 + ℓ
63	72	174.5	194.5 + ℓ	67 (79)	169.5 (181.5)	189.5 (201.5) + ℓ	84	186.5	206.5 + ℓ
80	82	210.5	219.5 + ℓ	76 (90)	204.5 (218.5)	213.5 (227.5) + ℓ	98	226.5	235.5 + ℓ
100	82	214	223 + ℓ	76 (90)	208 (222)	217 (231) + ℓ	98	230	239 + ℓ

* () : Denotes the dimensions for long stroke.

Rod flange: CBG1F□

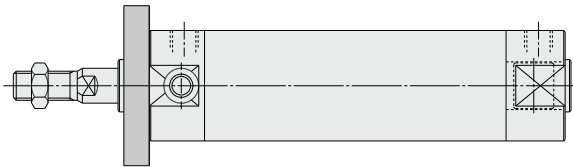

Head flange: CBG1G□

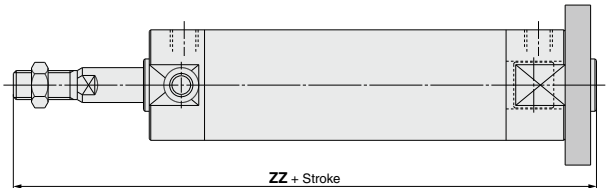

(mm)


Bore size (mm)	Head end lock: -H□		Rod end lock: -R□		Double end lock: -W□	
	ZZ (Head flange)		ZZ (Head flange)		ZZ (Head flange)	
	Without rod boot	With rod boot	Without rod boot	With rod boot	Without rod boot	With rod boot
20	124	144 + ℓ	123	143 + ℓ	135	155 + ℓ
25	130	152 + ℓ	129	151 + ℓ	141	163 + ℓ
32	130	152 + ℓ	130	152 + ℓ	140	162 + ℓ
40	152	172 + ℓ	147 (156)	167 (176) + ℓ	161	181 + ℓ
50	176	196 + ℓ	171 (183)	191 (203) + ℓ	188	208 + ℓ
63	176	196 + ℓ	171 (183)	191 (203) + ℓ	188	208 + ℓ
80	215	224 + ℓ	209 (223)	218 (232) + ℓ	231	240 + ℓ
100	218	227 + ℓ	212 (226)	221 (235) + ℓ	234	243 + ℓ

* () : Denotes the dimensions for long stroke.

With Mounting Bracket


Rod trunnion: CBG1U□

(Head end lock -H□ only)

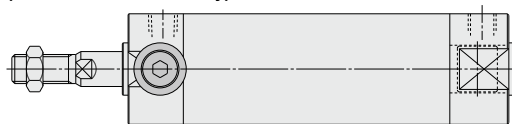


Head trunnion: CBG1T□

(Rod end lock -R□ only)

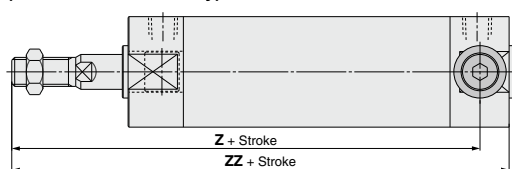


Clevis: CBG1D□

ø20 to ø63

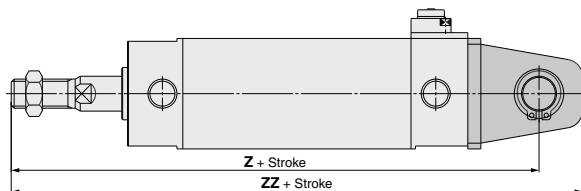

Clevis: CBG1D□

ø80, ø100

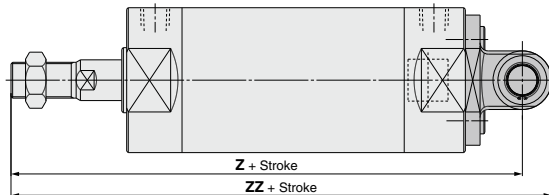

Bore size (mm)	Rod end lock: -R□			
	Z (Head trunnion)		ZZ (Head trunnion)	
	Without rod boot	With rod boot	Without rod boot	With rod boot
20	104	124 + ℓ	117	137 + ℓ
25	109	131 + ℓ	122	144 + ℓ
32	111	133 + ℓ	123	145 + ℓ
40	127 (134)	147 (154) + ℓ	139 (148)	159 (168) + ℓ
50	148 (159)	168 (179) + ℓ	162 (174)	182 (194) + ℓ
63	148 (159)	168 (179) + ℓ	162 (174)	182 (194) + ℓ

* (): Denotes the dimensions for long stroke.

Bore size (mm)	Head end lock: -H□				Rod end lock: -R□			
	Z		ZZ		Z		ZZ	
	Without rod boot	With rod boot	Without rod boot	With rod boot	Without rod boot	With rod boot	Without rod boot	With rod boot
20	130	150 + ℓ	141	161 + ℓ	129	149 + ℓ	140	160 + ℓ
25	137	159 + ℓ	150	172 + ℓ	136	158 + ℓ	149	171 + ℓ
32	141	163 + ℓ	156	178 + ℓ	141	163 + ℓ	156	178 + ℓ
40	164	184 + ℓ	182	202 + ℓ	159 (168)	179 (188) + ℓ	177 (186)	197 (206) + ℓ
50	190	210 + ℓ	210	230 + ℓ	185 (197)	205 (217) + ℓ	205 (217)	225 (237) + ℓ
63	195	215 + ℓ	217	237 + ℓ	190 (202)	210 (222) + ℓ	212 (224)	232 (244) + ℓ
80	236	245 + ℓ	254	263 + ℓ	230 (244)	239 (253) + ℓ	248 (262)	257 (277) + ℓ
100	244	253 + ℓ	266	275 + ℓ	238 (252)	247 (261) + ℓ	260 (274)	269 (283) + ℓ

Bore size (mm)	Double end lock: -W□			
	Z		ZZ	
	Without rod boot	With rod boot	Without rod boot	With rod boot
20	141	161 + ℓ	152	172 + ℓ
25	148	170 + ℓ	161	183 + ℓ
32	151	173 + ℓ	166	188 + ℓ
40	173	193 + ℓ	191	211 + ℓ
50	202	222 + ℓ	222	242 + ℓ
63	207	227 + ℓ	229	249 + ℓ
80	252	261 + ℓ	270	279 + ℓ
100	260	269 + ℓ	282	291 + ℓ

* (): Denotes the dimensions for long stroke.

Air Cylinder: Low Friction Type Double Acting, Single Rod

CG1□Q Series

ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

Use the new series
“Smooth Cylinder CG1Y series”
to realize both-direction low friction and low-speed operation.
(Refer to the Best Pneumatics No. 2-3.)

How to Order

CG1 L Q 25 - 100 F -

With auto switch **CDG1 L Q 25 - 100 F - M9BW - C -**

With auto switch
(Built-in magnet)

Mounting

B	Basic
L	Axial foot
F	Rod flange
G	Head flange
U*	Rod trunnion
T*	Head trunnion
D	Clevis

* Not available for ø80 and ø100.
Note) Mounting brackets are shipped together, (but not assembled).

Low friction type

F	With pressure at head side
B	With pressure at rod side

Direction of low friction

Auto switch

Nil	Without auto switch
-----	---------------------

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm
80	80 mm
100	100 mm

Cylinder stroke (mm)

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDG1FQ32-100B

Auto switch mounting bracket ^{Note)}

Note) This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

Made to Order

CG1 Series


Auto Switch Mounting

Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

Solid state auto switch

D-M9□/M9□W, D-M9□A


ø20 to ø63

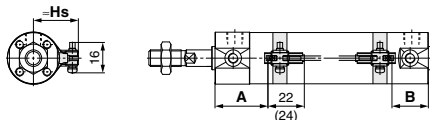

(): Dimension of the D-M9□A
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.

D-M9□V/M9□WV, D-M9□AV

ø20 to ø63

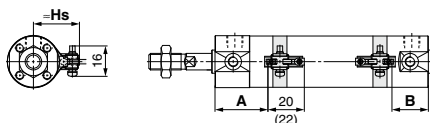


(): Dimension of the D-M9□AV
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.

D-G5/K5/G5□W/G5BA

D-K59W, D-G59F, D-G5NT


ø20 to ø100

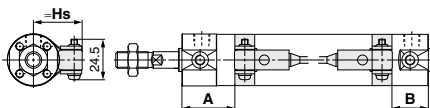

D-H7□/H7□W

D-H7NF/H7BA/D-H7C


ø20 to ø63

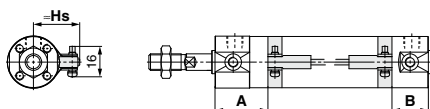

Reed auto switch

D-A9□


ø20 to ø63

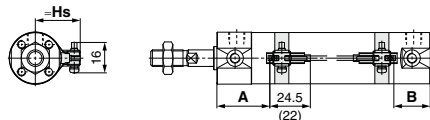

(): Dimension of the D-A9□
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.

D-A9□V


ø20 to ø63

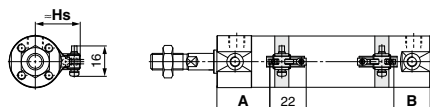

A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.


D-C7/C8, D-C73C/C80C

ø20 to ø63

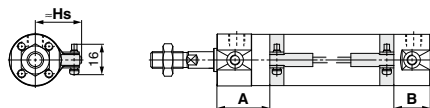

D-B5/B6/B59W

ø20 to ø100

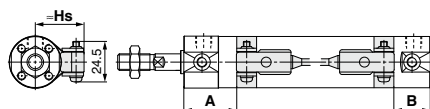

Auto Switch Mounting Height

(mm)

Auto switch model Bore size	D-M9□(V) D-M9□W(V) D-M9□A(V) D-A9□(V)	D-H7□ D-H7□W D-H7NF D-H7BA D-C7/C8	D-C73C D-C80C	D-G5/K5 D-G5□W D-K59W D-B5/B6 D-B59W	D-G5NT D-G59F D-H7C D-G5BA
	Hs	Hs	Hs	Hs	Hs
20	26.5	—	27	—	27.5
25	29	—	29.5	—	30
32	32.5	—	33	—	33.5
40	37	—	37.5	—	38
50	42.5	—	43	—	43.5
63	49.5	—	50	—	50.5
80	—	—	—	—	59
100	—	—	—	—	69.5

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data

Auto Switch Proper Mounting Position (Detection at Stroke End)

Except Single Acting, Direct Mount Type (CG1R, CG1KR) and With End Lock (CBG1)

(mm)

Auto switch model Bore size	D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV		D-A9□ D-A9□V		D-H7□W D-H7NF D-H7BA D-H7□		D-C7□ D-C80 D-C73C D-C80C		D-G5□/K59 D-G5□W/K59W D-G59F D-G5NT D-G5BA		D-B5□ D-B64		D-B59W	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
20	33	24 (32)	29	20 (28)	28.5	19.5 (27.5)	29.5	20.5 (28.5)	25	16 (24)	23.5	14.5 (22.5)	26.5	17.5 (25.5)
25	32.5	24.5 (32.5)	28.5	20.5 (28.5)	28	20 (28)	29	21 (29)	24.5	16.5 (24.5)	23	15 (23)	26	18 (26)
32	34	25 (33)	30	21 (29)	29.5	20.5 (28.5)	30.5	21.5 (29.5)	26	17 (25)	24.5	15.5 (23.5)	27.5	18.5 (26.5)
40	39	27 (36)	35	23 (32)	34.5	22.5 (31.5)	35.5	23.5 (32.5)	31	19 (28)	29.5	17.5 (26.5)	32.5	20.5 (29.5)
50	46	32 (44)	42	28 (40)	41.5	27.5 (39.5)	42.5	28.5 (40.5)	38	24 (36)	36.5	22.5 (34.5)	39.5	25.5 (37.5)
63	44.5	33.5 (45.5)	40.5	29.5 (41.5)	40	29 (41)	41	30 (42)	36.5	25.5 (37.5)	35	24 (36)	38	27 (39)
80	—	—	—	—	—	—	—	—	49.5	30.5 (44.5)	48	29 (43)	51	32 (46)
100	—	—	—	—	—	—	—	—	48.5	31.5 (45.5)	47	30 (44)	50	33 (47)

Note 1) The values in () are for long stroke.

Note 2) Adjust the auto switch after confirming the operating condition in the actual setting.

Single Acting, Spring Return Type (S)

Auto switch model	Bore size	A dimensions				B
		Up to 50 st	51 to 100 st	101 to 125 st	126 to 200 st	
D-M9□(V) D-M9□W(V) D-M9□A(V)	20	58	83	108	—	24
	25	57.5	82.5	107.5	132.5	24.5
	32	59	84	109	134	25
	40	64	89	114	139	27
D-A9□(V)	20	54	79	104	—	20
	25	53.5	78.5	103.5	128.5	20.5
	32	55	80	105	130	21
	40	60	85	110	135	23
D-H7□ D-H7□W D-H7C D-H7BA D-H7NF	20	53.5	78.5	103.5	—	19.5
	25	53	78	103	128	20
	32	54.5	79.5	109.5	129.5	20.5
	40	59.5	84.5	109.5	134.5	22.5
D-C7□ D-C80 D-C73C D-C80C	20	54.5	79.5	104.5	—	20.5
	25	54	79	104	129	21
	32	55.5	80.5	105.5	130.5	21.5
	40	60.5	85.5	110.5	135.5	23.5
D-G5NT D-G59F	20	50	75	100	—	16
	25	49.5	74.5	99.5	124.5	16.5
	32	51	76	101	126	17
	40	56	81	106	131	19
D-B5□ D-B64	20	48.5	73.5	98.5	—	14.5
	25	48	73	98	123	15
	32	49.5	74.5	99.5	124.5	15.5
	40	54.5	79.5	104.5	129.5	17.5
D-B59W	20	51.5	76.5	101.5	—	17.5
	25	51	76	101	126	18
	32	52.5	77.5	102.5	127.5	18.5
	40	57.5	82.5	107.5	132.5	20.5

Note) Adjust the auto switch after confirming the operating condition in the actual setting.

Auto Switch Proper Mounting Position (Detection at Stroke End)**Single Acting, Spring Extend Type (T)**

(mm)

Auto switch model	Bore size	A	B dimensions			
			Up to 50 st	51 to 100 st	101 to 125 st	126 to 200 st
D-M9□(V)	20	33	49	74	99	—
D-M9□W(V)	25	32.5	49.5	74.5	99.5	124.5
D-M9□A(V)	32	34	50	75	100	125
	40	39	52	77	102	127
D-A9□(V)	20	29	45	70	95	—
	25	28.5	45.5	70.5	95.5	120.5
	32	30	46	71	96	121
	40	35	48	73	98	123
D-H7□	20	28.5	44.5	69.5	94.5	—
D-H7□W	25	28	45	70	95	120
D-H7C	32	29.5	45.5	70.5	95.5	120.5
D-H7BA	40	34.5	47.5	72.5	97.5	122.5
D-H7NF	20	29.5	45.5	70.5	95.5	—
D-C7□	25	29	46	71	96	121
D-C80	32	30.5	46.5	71.5	96.5	121.5
D-C73C	40	35.5	48.5	73.5	98.5	123.5
D-C80C	20	25	41	66	91	—
D-G5NT	25	24.5	41.5	66.5	91.5	116.5
	32	26	42	67	92	117
	40	31	44	69	94	119
	20	23.5	39.5	64.5	89.5	—
D-B5□	25	23	40	65	90	115
D-B64	32	24.5	40.5	65.5	90.5	115.5
	40	29.5	42.5	67.5	92.5	117.5
D-B59W	20	26.5	42.5	67.5	92.5	—
	25	26	43	68	93	118
	32	27.5	43.5	68.5	93.5	118.5
	40	32.5	45.5	70.5	95.5	120.5

(Note) Adjust the auto switch after confirming the operating condition in the actual setting.

Direct Mount Type (CG1R, CG1KR)

(mm)

Auto switch model	D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV		D-A9□ D-A9□V		D-H7□W D-H7NF D-H7BA D-H7□ D-H7C		D-C7□ D-C80 D-C73C D-C80C		D-G59F D-G5NT		D-B5□ D-B64		D-B59W	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
Bore size														
20	12	24	8	20	7.5	19.5	8.5	20.5	4	16	2.5	14.5	5.5	17.5
25	11.5	24.5	7.5	20.5	7	20	8	21	3.5	16.5	2	15	5	18
32	13	25	9	21	8.5	20.5	9.5	21.5	5	17	3.5	15.5	6.5	18.5
40	18	27	14	23	13.5	22.5	14.5	23.5	10	19	8.5	17.5	11.5	20.5
50	20	32	16	28	15.5	27.5	16.5	28.5	12	24	10.5	22.5	13.5	25.5
63	18.5	33.5	14.5	29.5	14	29	15	30	10.5	25.5	9	24	12	27

(Note) Adjust the auto switch after confirming the operating condition in the actual setting.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical
Data

Auto Switch Proper Mounting Position (Detection at Stroke End)

With End Lock (CBG1)

(mm)

Auto switch model Bore size	Lock position	D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV		D-A9□ D-A9□V		D-H7□ D-H7C D-H7□W D-H7BA D-H7NF		D-G5□W D-K59W D-G59F D-G5 D-K5 D-G5NT D-G5BA		D-C7 D-C8 D-C73C D-C80C		D-B5 D-B6		D-B59W	
		A	B	A	B	A	B	A	B	A	B	A	B	A	B
20	Head end	33	36	29	32	28.5	31.5	25	28	29.5	32.5	23.5	26.5	26.5	29.5
	Rod end	44	24 (32)	40	20 (28)	39.5	19.5 (27.5)	36	16 (24)	40.5	20.5 (28.5)	34.5	14.5 (22.5)	37.5	17.5 (25.5)
	Double end	44	36	40	32	39.5	31.5	36	28	40.5	32.5	34.5	26.5	37.5	29.5
25	Head end	33	36	29	32	28.5	31.5	25	28	29.5	32.5	23.5	26.5	26.5	29.5
	Rod end	44	24 (32)	40	20 (28)	39.5	19.5 (27.5)	36	16 (24)	40.5	20.5 (28.5)	34.5	14.5 (22.5)	37.5	17.5 (25.5)
	Double end	44	36	40	32	39.5	31.5	36	28	40.5	32.5	34.5	26.5	37.5	29.5
32	Head end	34	35	30	31	29.5	30.5	26	27	30.5	31.5	24.5	25.5	27.5	28.5
	Rod end	44	25 (33)	40	21 (29)	39.5	20.5 (28.5)	36	17 (25)	40.5	21.5 (29.5)	34.5	15.5 (23.5)	37.5	18.5 (26.5)
	Double end	44	35	40	31	39.5	30.5	36	27	40.5	31.5	34.5	25.5	37.5	28.5
40	Head end	39	41	35	37	34.5	36.5	31	33	35.5	37.5	29.5	31.5	32	34.5
	Rod end	48	27 (36)	44	23 (32)	43.5	22.5 (31.5)	40	19 (28)	44.5	23.5 (32.5)	38.5	17.5 (26.5)	41	20.5 (29.5)
	Double end	48	41	44	37	43.5	36.5	40	33	44.5	37.5	38.5	31.5	41	34.5
50	Head end	46	49	42	45	41.5	44.5	38	41	42.5	45.5	36.5	39.5	39.5	42.5
	Rod end	58	32 (44)	54	28 (40)	53.5	27.5 (39.5)	50	24 (36)	54.5	28.5 (40.5)	48.5	22.5 (34.5)	51.5	25.5 (37.5)
	Double end	58	49	54	45	53.5	44.5	50	41	54.5	45.5	48.5	39.5	51.5	42.5
63	Head end	46	49	42	45	41.5	44.5	38	41	42.5	45.5	36.5	39.5	39.5	42.5
	Rod end	58	32 (44)	54	28 (40)	53.5	27.5 (39.5)	50	24 (36)	54.5	28.5 (40.5)	48.5	22.5 (34.5)	51.5	25.5 (37.5)
	Double end	58	49	54	45	53.5	44.5	50	41	54.5	45.5	48.5	39.5	51.5	42.5
80	Head end							48	54			46.5	52.5	49.5	55.5
	Rod end	—	—	—	—	—	—	64	32 (46)	—	—	62.5	30.5 (44.5)	65.5	33.5 (47.5)
	Double end							64	54			62.5	52.5	65.5	55.5
100	Head end							48	54			46.5	52.5	49.5	55.5
	Rod end	—	—	—	—	—	—	64	32 (46)	—	—	62.5	30.5 (44.5)	65.5	33.5 (47.5)
	Double end							64	54			62.5	52.5	65.5	55.5

Note 1) The values in () are for long stroke.



Note 2) Adjust the auto switch after confirming the operating condition in the actual setting.

Minimum Stroke for Auto Switch Mounting

Auto switch model	n: Number of auto switches (mm)				
	With 1 pc.	Number of auto switches			
		With 2 pcs.		With n pcs.	
		Different surfaces	Same surface	Different surfaces	Same surface
D-M9□	5	15 <small>Note 1)</small>	40 <small>Note 1)</small>	$20 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$55 + 35 (n-2)$ (n = 2, 3, 4, 5...)
D-M9□W	10	15 <small>Note 1)</small>	40 <small>Note 1)</small>	$20 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$55 + 35 (n-2)$ (n = 2, 3, 4, 5...)
D-M9□A	10	25	40 <small>Note 1)</small>	$25 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$60 + 35 (n-2)$ (n = 2, 3, 4, 5...)
D-A9□	5	15	30 <small>Note 1)</small>	$15 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$50 + 35 (n-2)$ (n = 2, 3, 4, 5...)
D-M9□V	5	20	35	$20 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$35 + 35 (n-2)$ (n = 2, 3, 4, 5...)
D-A9□V	5	15	25	$15 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$25 + 35 (n-2)$ (n = 2, 3, 4, 5...)
D-M9□WV D-M9□AV	10	20	35	$20 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$35 + 35 (n-2)$ (n = 2, 3, 4, 5...)
D-C7□ D-C80	5	15	50	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$50 + 45 (n-2)$ (n = 2, 3, 4, 5...)
D-H7□ D-H7□W D-H7BA D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$60 + 45 (n-2)$ (n = 2, 3, 4, 5...)
D-H7C D-C73C D-C80C	5	15	65	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$65 + 50 (n-2)$ (n = 2, 3, 4, 5...)
D-G5□ D-K59□ D-B5□ D-B64	5	15	75	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$75 + 55 (n-2)$ (n = 2, 3, 4, 5...)
D-B59W	10	20	75	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6... <small>Note 3)</small>	$75 + 55 (n-2)$ (n = 2, 3, 4, 5...)

Note 1) Auto switch mounting

Note 3) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

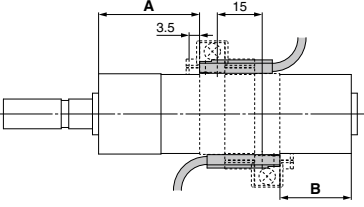Auto switch model	With 2 auto switches	
	Different surfaces <small>Note 1)</small>	Same surface <small>Note 1)</small>
	 <p>Correct auto switch mounting position is 3.5 mm from the back face of the switch holder.</p>	 <p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-M9□ D-M9□W	Less than 20 stroke <small>Note 2)</small>	Less than 55 stroke <small>Note 2)</small>
D-M9□A	Less than 20 stroke <small>Note 2)</small>	Less than 60 stroke <small>Note 2)</small>
D-A9□	—	Less than 50 stroke <small>Note 2)</small>

Note 2) Minimum stroke for auto switch mounting in types other than those mentioned in Note 1.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical
Data

Auto Switch Mounting Brackets/Part No.

Auto switch model	Bore size (mm)							
	20	25	32	40	50	63	80	100
D-M9□(V) D-M9□W(V) D-A9□(V)	BMA3-020 (A set of a, b, c, d)	BMA3-025 (A set of a, b, c, d)	BMA3-032 (A set of a, b, c, d)	BMA3-040 (A set of a, b, c, d)	BMA3-050 (A set of a, b, c, d)	BMA3-063 (A set of a, b, c, d)	—	—
D-M9□A(V) <small>Note 2)</small>	BMA3-020S (A set of b, c, d, e)	BMA3-025S (A set of b, c, d, e)	BMA3-032S (A set of b, c, d, e)	BMA3-040S (A set of b, c, d, e)	BMA3-050S (A set of b, c, d, e)	BMA3-063S (A set of b, c, d, e)	—	—
<div><div><div>Switch bracket (Resin) a Transparent (Nylon) <small>Note 1)</small> e White (PBT)</div><div>Auto switch</div><div>b Switch holder</div><div>c Auto switch mounting band</div><div>d Auto switch mounting screw</div></div><p>* Band (c) is mounted so that the projected part is on the internal side (contact side with the tube).</p></div>								
D-H7□ D-H7□W D-H7NF D-C7□/C80 D-C73C/C80C	BMA2-020A (A set of band and screw)	BMA2-025A (A set of band and screw)	BMA2-032A (A set of band and screw)	BMA2-040A (A set of band and screw)	BMA2-050A (A set of band and screw)	BMA2-063A (A set of band and screw)	—	—
D-H7BA	BMA2-020AS (A set of band and screw)	BMA2-025AS (A set of band and screw)	BMA2-032AS (A set of band and screw)	BMA2-040AS (A set of band and screw)	BMA2-050AS (A set of band and screw)	BMA2-063AS (A set of band and screw)	—	—
D-G5□/K59 D-G5□W/K59W D-G5BA/G59F D-G5NT D-B5□/B64 D-B59W D-G5NB	BA-01 (A set of band and screw)	BA-02 (A set of band and screw)	BA-32 (A set of band and screw)	BA-04 (A set of band and screw)	BA-05 (A set of band and screw)	BA-06 (A set of band and screw)	BA-08 (A set of band and screw)	BA-10 (A set of band and screw)

Note 1) Since the switch bracket (made from nylon) are affected in an environment where alcohol, chloroform, methylamines, hydrochloric acid or sulfuric acid is splashed over, so it cannot be used.
Please contact SMC regarding other chemicals.

Note 2) As the indicator LED is projected from the switch unit, indicator LED may be damaged if the switch bracket is fixed on the indicator LED.

Band Mounting Brackets Set Part No.

Set part no.	Contents
BMA2-□□□A(S) * S: Stainless steel screw	- Auto switch mounting band (c) - Auto switch mounting screw (d)
BJ4-1	- Switch bracket (White/PBT) (e) - Switch holder (b)
BJ5-1	- Switch bracket (Transparent/Nylon) (a) - Switch holder (b)

[Stainless Steel Mounting Screw]

The following stainless steel mounting screw kit is available. Use it in accordance with the operating environment.
(Since the auto switch mounting bracket is not included, order it separately.)
BBA3: D-B5/B6/G5/K5 types







Note 3) Refer to page 1681 for details on the BBA3.
When the D-G5BA type auto switch is shipped independently, the BBA3 is attached.

Operating Range

(mm)								
Auto switch model	Bore size							
	20	25	32	40	50	63	80	100
D-M9□(V) D-M9□W(V) D-M9□A(V)	4.5	5.0	4.5	5.5	5.0	5.5	—	—
D-A9□	7	6	8	8	8	9	—	—
D-C7/C80 D-C73C/C80C	8	10	9	10	10	11	—	—
D-B5□/B64	8	10	9	10	10	11	11	11
D-B59W	13	13	14	14	14	17	16	18
D-H7□/H7□W D-H7NF/H7BA	4	4	4.5	5	6	6.5	—	—
D-H7C	7	8.5	9	10	9.5	10.5	—	—
D-G5□/G5□W/G59F D-G5BA/K59/K59W	4	4	4.5	5	6	6.5	6.5	7
D-G5NT	4	4	4.5	5	6	6.5	6.5	7
D-G5NB	35	40	40	45	45	45	45	50

* Values which include hysteresis are for guideline purposes only, they are not a guarantee (assuming approximately ±30% dispersion) and may change substantially depending on the ambient environment.

Cylinder Mounting Bracket, by Stroke/Auto Switch Mounting Surfaces

Auto switch model	Basic, Foot, Flange, Clevis (mm)						st: Stroke (mm)
	With 1 pc. (Rod cover side)	With 2 pcs. (Different surfaces)	With 2 pcs. (Same surface)	With 1 pc. (Rod cover side)	With 2 pcs. (Different surfaces)	With 2 pcs. (Same surface)	
Auto switch mounting surface	Port surface 	Port surface 	Port surface 				
Auto switch type							
D-M9□(V) D-M9□W(V) D-M9□A(V) D-A9□	10 st or more	15 to 44 st	45 st or more	10 st or more	15 to 44 st	45 st or more	
D-C7/C8	10 st or more	15 to 49 st	50 st or more	10 st or more	15 to 49 st	50 st or more	
D-H7□/H7□W D-H7BA/H7NF	10 st or more	15 to 59 st	60 st or more	10 st or more	15 to 59 st	60 st or more	
D-H7C/C73C/C80C	10 st or more	15 to 64 st	65 st or more	10 st or more	15 to 64 st	65 st or more	
D-G5/K5/B5/B6 D-G5□W/K59W/G5BA D-G59F/G5NT	10 st or more	15 to 74 st	75 st or more	10 st or more	15 to 74 st	75 st or more	
D-B59W	15 st or more	20 to 74 st	75 st or more	15 st or more	20 to 74 st	75 st or more	

* Trunnion type is not available for ø80 and ø100.

* Adjust the auto switch mounting angle according to the customer's application.

Other than the applicable auto switches listed in “How to Order”, the following auto switches are mountable.

Refer to pages 1575 to 1701 for the detailed specifications.

Type	Model	Electrical entry	Features	Applicable bore size
Solid state	D-H7A1, H7A2, H7B	Grommet (In-line)	—	ø20 to ø63
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color indicator)	
	D-H7BA		Water resistant (2-color indicator)	
	D-G5NT		With timer	ø20 to ø100
Reed	D-C73, C76		—	ø20 to ø63
	D-C80		Without indicator light	
	D-B53		—	ø20 to ø100

* With pre-wired connector is also available for solid state auto switches. For details, refer to pages 1648 and 1649.

* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H) are also available. For details, refer to page 1593.

* Wide range detection type, solid state auto switch (D-G5NB) is also available. For details, refer to page 1638.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical
Data



1 PTFE Grease

Symbol

-X446

Applicable to environments incompatible with mineral oil
PTFE grease (fluorine grease) is used as the lubricating grease.

Applicable Series

Description	Model	Action	Note
Standard type	CG1	Double acting, Single rod	Except with air cushion

Specifications: Same as standard type

Dimensions: Same as standard type

* When grease is necessary for maintenance, grease pack is available,
please order it separately.
GR-F-005 (Grease: 5 g)

How to Order

Standard model no.

- X446

PTFE grease ●



CG1 Series

Specific Product Precautions 1

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 3 to 12 for Actuator and Auto Switch Precautions.

<Precautions on each series>

Handling

⚠ Warning

1. Do not operate the cushion valve in the fully closed or fully opened state.

Using it in the fully closed state will cause the cushion seal to be damaged. Using it in the fully opened state will cause the piston rod assembly or the cover to be damaged.

2. Do not turn the cushion valve the number of rotations shown below or more from its fully closed state.

If it is turned the number of rotations shown below or more, the cushion valve may come off.

Bore size (mm)	Rotations	Hexagon wrench nominal size
20	2	1.5
25	4.5	1.5
32	4.5	1.5
40	5	1.5
50	3	3
63	4.5	3
80	5	4
100	5	4

3. Do not open the cushion valve after rotating it numerous times in a row. Though uncommon, there are cases in which the cushion valve may leak air.

The cushion valve should be adjusted by gradually opening it while checking the operation of the cylinder cushion.

4. Operate within the specified cylinder speed and kinetic energy.

Otherwise, cylinder and seal damage may occur.

5. When a cylinder is operated with one end fixed and other free (basic, flange types), a bending moment may act on the cylinder due to the vibration generated at the stroke end, which can damage the cylinder. In such a case, install a mounting bracket to suppress the vibration of the cylinder body or reduce the piston speed so that the cylinder does not vibrate. Also, use a mounting bracket to suppress vibrations when moving the cylinder body or when a cylinder is operated horizontally and fixed at one end at a high speed and frequency.

⚠ Caution

1. Use caution regarding the cushion performance in the low-speed range.

There may be individual performance and effect variances when used near 50 mm/s. Please consult with SMC about usage.

2. Do not apply excessive lateral load to the piston rod.

Easy checking method

Minimum operating pressure after the cylinder is mounted to the equipment (MPa) = Minimum operating pressure of cylinder (MPa) + (Load weight (kg) x 9.8 x Friction coefficient of guide/Sectional area of cylinder (mm²))

If smooth operation is confirmed within the above value, the load on the cylinder is the resistance of the thrust only and it can be judged as having no lateral load.

3. Do not use the air cylinder as an air-hydro cylinder.

This may result in oil leak.

4. Install a rod boot without twisting.

If the cylinder is installed with its bellows twisted, it could damage the bellows.

5. Tighten clevis bracket mounting bolts with the following proper tightening torque.

ø20: 1.5 N·m, ø25 to 32: 2.9 N·m, ø40: 4.9 N·m,

ø50: 11.8 N·m, ø63 to 80: 24.5 N·m, ø100: 42.2 N·m

Disassembly/Replacement

⚠ Warning

1. Only people who have sufficient knowledge and experience are allowed to replace seals.

The person who disassembles and reassembles the cylinder is responsible for the safety of the product. Repeatedly disassembling and reassembling the product may cause wearing or deformation of the screws as well as a decline in screw tightening strength. When reassembling the product, be sure to check the cover and tubing screws for wear, deformities, or any other abnormalities. Operating the product with damaged screws may result in the cover or tubing coming off during operation, which could lead to a serious accident. Caution must be taken to avoid such incidents.

⚠ Caution

1. Do not replace the bushings.

The bushings are press-fit. To replace them, they must be replaced together with the cover assembly.

2. To replace a seal, apply grease to the new seal before installing it.

If the cylinder is put into operation without applying grease to the seal, it could cause the seal to wear significantly, leading to premature air leakage.

3. Cylinders with ø50 or larger bore sizes cannot be disassembled.

When disassembling cylinders with bore sizes of ø20 through ø40, grip the double flat part of either the tube cover or the rod cover with a vise and loosen the other side with a wrench or a monkey wrench etc., and then remove the cover. When re-tightening, tighten approximately 2 degrees more than the original position. (Cylinders with ø50 or larger bore sizes are tightened with a large tightening torque and cannot be disassembled. If disassembly is required, please contact SMC.)

4. When replacing seals, take care not to hurt your hand or finger on the corners of parts.

<Precautions on the non-rotating rod type>

Handling

⚠ Caution

1. Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.

- If rotational torque is applied, the non-rotating guide will become deformed, thus affecting the non-rotating accuracy. Refer to the table below for the approximate values of the allowable range of rotational torque.

Allowable rotational torque (N·m or less)	ø20	ø25, ø32	ø40, ø50, ø63
	0.2	0.25	0.44

- To screw a bracket or a nut onto the piston rod, make sure to retract the piston rod entirely, and place a wrench over the flat portion of the rod that protrudes. Tighten it by giving consideration to prevent the tightening torque from being applied to the non-rotating guide.



Disassembly/Replacement

⚠ Caution

1. When replacing rod seals, please contact SMC.

Air leakage may be happened, depending on the position in which a rod seal is fitted. Thus, please contact SMC when replacing them.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data



CG1 Series

Specific Product Precautions 2


Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 3 to 12 for Actuator and Auto Switch Precautions.

<End Lock Cylinder Precautions>

Use the Recommended Pneumatic Circuit

⚠ Caution

- This is necessary for proper operation and release of the lock.

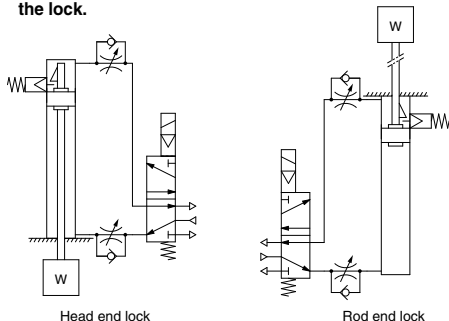

Handling

⚠ Caution

1. **Do not use 3 position solenoid valves.**
Avoid use in combination with 3 position solenoid valves (especially closed center metal seal types). If pressure is trapped in the port on the lock mechanism side, the cylinder cannot be locked. Furthermore, even after being locked, the lock may be released after some time, due to air leaking from the solenoid valve and entering the cylinder.
2. **Back pressure is required when releasing the lock.**
Be sure air is supplied to the side of the cylinder without a lock mechanism, (side of the piston rod without lock for double end lock), before starting up, as in the above figures. Otherwise, the lock may not be released. (Refer to "Releasing the Lock".)
3. **Release the lock when mounting or adjusting the cylinder.**
If mounting or other work is performed when the cylinder is locked, the lock unit may be damaged.
4. **Operate with a load ratio of 50% or less.**
If the load ratio exceeds 50%, this may cause problems such as failure of the lock to release, or damage to the lock unit.
5. **Do not operate multiple cylinders in synchronization.**
Avoid applications in which two or more cylinders with end lock are synchronized to move one workpiece, as one of the cylinder locks may not be able to release when required.
6. **Use a speed controller with meter-out control.**
Lock cannot be released occasionally by meter-in control.
7. **Be sure to operate completely to the cylinder stroke end on the side with the lock.**
If the cylinder piston does not reach the end of the stroke, locking and unlocking may not be possible.
8. **Do not use the air cylinder as an air-hydo cylinder.**
This may result in oil leak.
9. **Install a rod boot without twisting.**
If the cylinder is installed with its bellows twisted, it could damage the bellows.
10. **Adjust an auto switch position so that it operates for movement to both the stroke end and backlash (2 mm) positions.**
When a 2-color indicator switch is adjusted for green indication at the stroke end, it may change to red for the backlash return, but this is not abnormal.

Handling

⚠ Warning

1. **Do not operate the cushion valve in the fully closed or fully opened state.**
Using it in the fully closed state will cause the cushion seal to be damaged. Using it in the fully opened state will cause the piston rod assembly or the cover to be damaged.
2. **Operate within the specified cylinder speed.**
Otherwise, cylinder and seal damage may occur.

Operating Pressure

⚠ Caution

1. Supply air pressure of 0.15 MPa or higher to the port on the lock mechanism side, as it is necessary for releasing the lock.

Exhaust Speed

⚠ Caution

1. The lock will be engaged automatically if the pressure applied to the port on the lock mechanism side falls to 0.05 MPa or less. In cases where the piping on the lock mechanism side is long and thin, or the speed controller is separated at some distance from the cylinder port, the exhaust speed will be reduced. Take note that some time may be required for the lock to engage. In addition, clogging of a silencer mounted on the solenoid valve exhaust port can produce the same effect.

Relation to Cushion

⚠ Caution

1. When cushion valve at lock mechanism side is fully opened or closed, piston rod may not be reached at stroke end. Thus, lock is not established. And when locking is done at cushion valve fully closed, adjust cushion valve since lock may not be released.

Releasing the Lock

⚠ Warning

1. Before releasing the lock, be sure to supply air to the side without a lock mechanism, so that there is no load applied to the lock mechanism when it is released. (Refer to the recommended pneumatic circuits.) If the lock is released when the port on the other side is in an exhaust state, and with a load applied to the lock unit, the lock unit may be subjected to an excessive force and be damaged. Furthermore, sudden movement of the piston rod is very dangerous.

Disassembly/Replacement

⚠ Caution

1. **Do not replace the bushings.**
The bushings are press-fit. To replace them, they must be replaced together with the cover assembly.
2. **To replace a seal, apply grease to the new seal before installing it.**
If the cylinder is put into operation without applying grease to the seal, it could cause the seal to wear significantly, leading to premature air leakage.
3. **Cylinders with ø50 or larger bore sizes cannot be disassembled.**
When disassembling cylinders with bore sizes of ø20 through ø40, grip the double flat part of either the tube cover or the rod cover with a vise and loosen the other side with a wrench or a monkey wrench etc., and then remove the cover. When re-tightening, tighten approximately 2 degrees more than the original position. (Cylinders with ø50 or larger bore sizes are tightened with a large tightening torque and cannot be disassembled. If disassembly is required, please contact SMC.)



CG1 Series

Specific Product Precautions 3

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 3 to 12 for Actuator and Auto Switch Precautions.

Manual Release

⚠ Caution

1. Non-locking type manual release


Insert the accessory bolt from the top of the rubber cap (it is not necessary to remove the rubber cap), and after screwing it into the lock piston, pull it to release the lock. If you stop pulling the bolt, the lock will return to an operational state.

Thread sizes, pulling forces and strokes are as shown below.

Bore size (mm)	Thread size	Pulling force	Stroke (mm)
20, 25, 32	M2.5 x 0.45 x 25 L or more	4.9 N	2
40, 50, 63	M3 x 0.5 x 30 L or more	10 N	3
80, 100	M5 x 0.8 x 40 L or more	24.5 N	3

Remove the bolt for normal operation.

It can cause lock malfunction or faulty release.




2. Locking type manual release

While pushing the M/O knob, turn it 90° counterclockwise. The lock is released (and remains in a released state) by aligning the ▲ mark on the cap with the ▼OFF mark on the M/O knob.

When locking is desired, turn the M/O knob 90° clockwise while pushing completely down, and align the ▲ mark on the cap with the ▼ON mark on the M/O knob. The correct position is confirmed by a clicking sound.

Failure to click it into place properly can cause the lock to disengage.

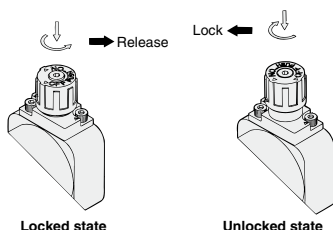


Working Principle


* The figures below are the same as those for CBA2 series.

● Head end lock (Rod end lock is the same.)


1. When the piston rod is getting closer to the stroke end, the taper part (*) of the piston rod edge will push the lock piston up.

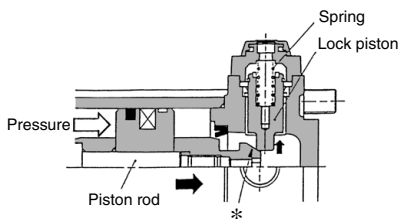


2. The lock piston is pushed up further.

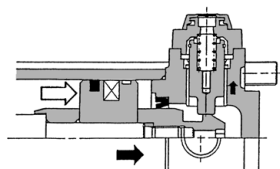


3. The lock piston is pushed up into the groove of the piston rod to lock it. (The lock piston is pushed up by spring force.) At this time, it is exhausted from the port on the head side and introduced into the atmosphere.

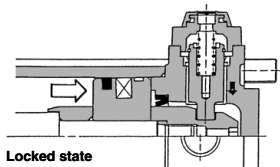

4. When pressure is supplied in the head side, lock piston will be pushed up to release the lock.

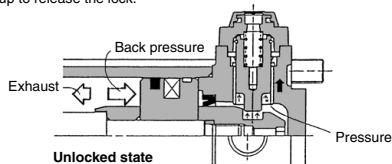

5. When the lock is released, the cylinder will move forward.

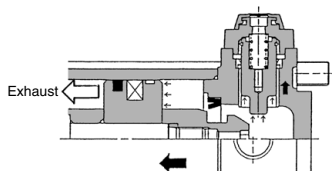

CG1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□


-X□

Technical Data

Material Stainless Steel

Foot Bracket, Flange Bracket, Single Knuckle Joint, Double Knuckle Joint

CJ2, CM2, CG1, CQ2 Series

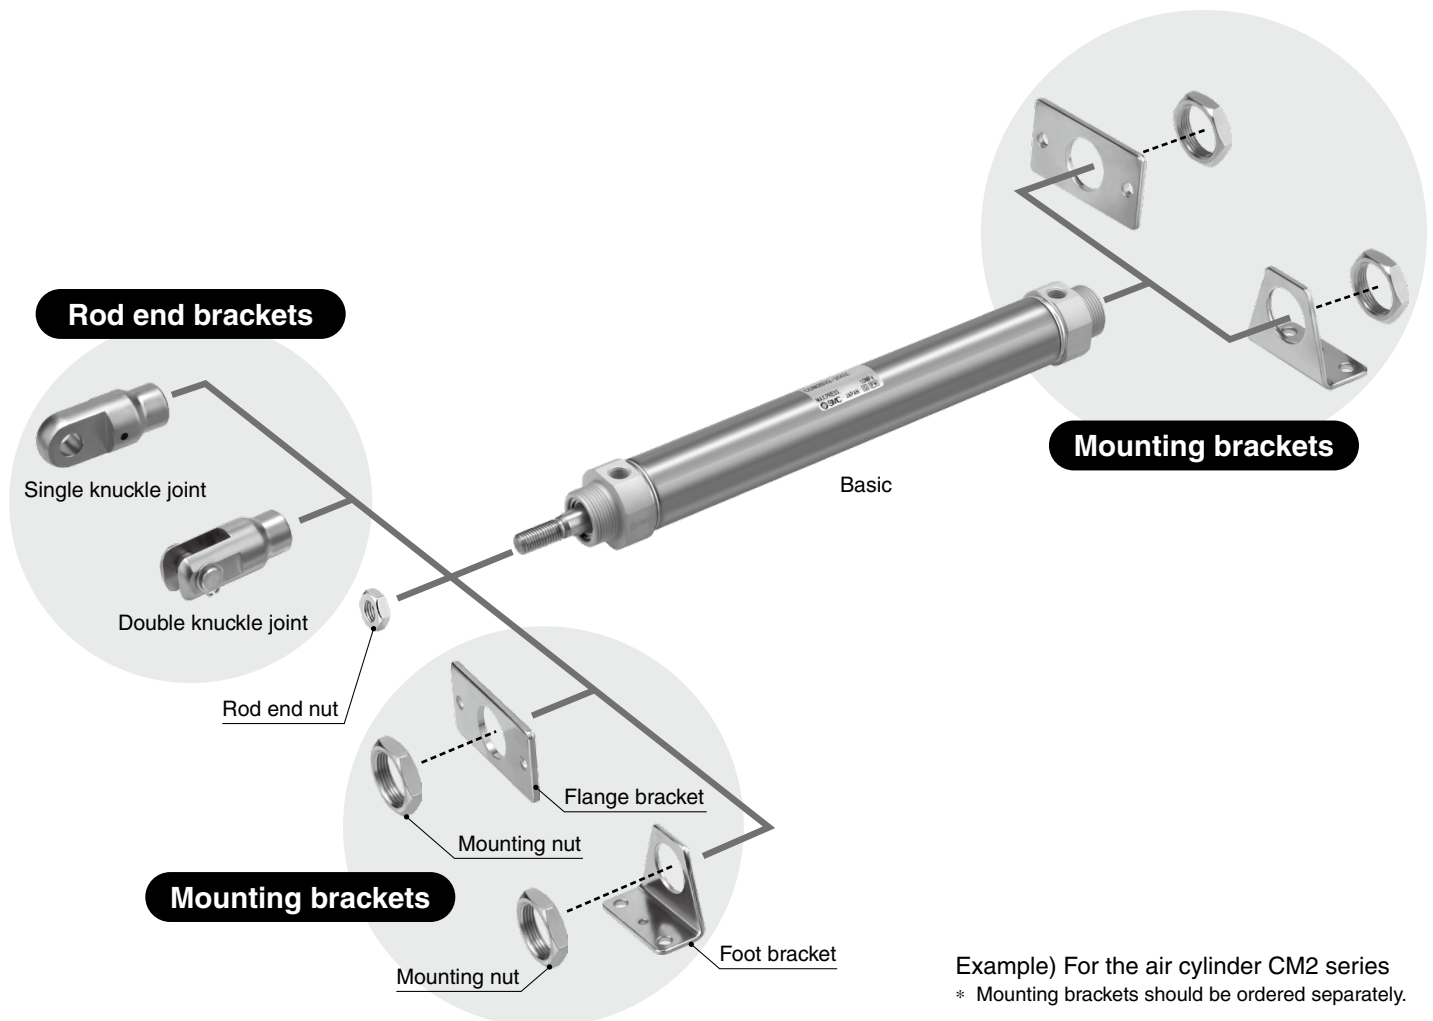

■ **External dimensions and mounting dimensions are interchangeable^{*1} with the standard type. Post-mounting is possible.**

^{*1} Excludes the foot bracket and flange bracket of the CG1 series


Bracket Applicable Cylinders

Series	Bore size [mm]	Foot bracket	Flange bracket	Single knuckle joint	Double knuckle joint	Mounting nut	Rod end nut
CJ2	10, 16	●	●	●	●	●	●
CM2	20, 25, 32, 40	●	●	●	●	●	●
CG1	20, 25, 32, 40, 50, 63, 80, 100	●	●	●	●	—	●
CQ2	20, 25, 32, 40, 50, 63, 80, 100	—	—	●	●	—	●


Mounting Bracket/Rod End Bracket Part Nos.

* Brackets should be ordered separately from cylinders.


CJ2 Series

	Bore size [mm]	Foot bracket	Flange bracket	Single knuckle joint	Double knuckle joint	Mounting nut	Rod end nut
	10	—	—	I-J010SUS	Y-J010SUS	—	NTJ-010SUS
	16	CJ-L016SUS	CJ-F016SUS	I-J016SUS	Y-J016SUS	SNJ-016SUS	NTJ-015SUS
	Contents	Foot bracket: 1 pc.	Flange bracket: 1 pc.	Single knuckle joint: 1 pc.	Double knuckle joint: 1 pc. Knuckle pin: 1 pc. Retaining ring: 2 pcs.	Mounting nut: 1 pc.	Rod end nut: 1 pc.
	Minimum order quantity	1	1	1	1	1	1


CM2 Series

	Bore size [mm]	Foot bracket	Flange bracket	Single knuckle joint	Double knuckle joint	Mounting nut	Rod end nut
	20	CM-L020BSUS	CM-F020BSUS	I-020BSUS	Y-020BSUS	SN-020BSUS	NT-02SUS
	25, 32	CM-L032BSUS	CM-F032BSUS	I-032BSUS	Y-032BSUS	SN-032BSUS	NT-03SUS
	40	CM-L040BSUS	CM-F040BSUS	I-040BSUS	Y-040BSUS	SN-040BSUS	NT-04SUS
	Contents	Foot bracket: 1 pc.	Flange bracket: 1 pc.	Single knuckle joint: 1 pc.	Double knuckle joint: 1 pc. Knuckle pin: 1 pc. Retaining ring: 2 pcs. (Split pins for ø40)	Mounting nut: 1 pc.	Rod end nut: 1 pc.
Minimum order quantity		1	1	1	1	1	1

CG1 Series

	Bore size [mm]	Foot bracket	Flange bracket	Single knuckle joint	Double knuckle joint	Rod end nut
	20	—	—	I-G02SUS	Y-G02SUS	NT-02SUS
	25	—	—	I-G03SUS	Y-G03SUS	NT-03SUS
	32	CG-L032SUS	CG-F032SUS			
	40	CG-L040SUS	CG-F040SUS	I-G04SUS	Y-G04SUS	NT-G04SUS
	50	CG-L050SUS	CG-F050SUS	I-G05SUS	Y-G05SUS	NT-05SUS
	63	CG-L063SUS	CG-F063SUS			
	80	CG-L080SUS	CG-F080SUS	I-G08SUS	Y-G08SUS	NT-08SUS
	100	CG-L100SUS	CG-F100SUS	I-G10SUS	Y-G10SUS	NT-10SUS
	Contents	Foot bracket: 2 pcs. Mounting bolt: 4 pcs.	Flange bracket: 1 pc. Mounting bolt: 4 pcs.	Single knuckle joint: 1 pc.	Double knuckle joint: 1 pc. Knuckle pin: 1 pc. Retaining ring: 2 pcs.	Rod end nut: 1 pc.
Minimum order quantity		2	1	1	1	1

CQ2 Series

	Bore size [mm]	Foot bracket	Flange bracket	Single knuckle joint	Double knuckle joint	Rod end nut
	20	—	—	I-G02SUS	Y-G02SUS	NT-02SUS
	25			I-G03SUS	Y-G03SUS	NT-03SUS
	32			I-G04SUS	Y-G04SUS	NT-G04SUS
	40					
	50			I-G05SUS	Y-G05SUS	NT-05SUS
	63	—	—	I-G08SUS	Y-G08SUS	NT-08SUS
	80					
	100			I-G10SUS	Y-G10SUS	NT-10SUS
	Contents	—	—	Single knuckle joint: 1 pc.	Double knuckle joint: 1 pc. Knuckle pin: 1 pc. Retaining ring: 2 pcs.	Rod end nut: 1 pc.
Minimum order quantity		—	—	1	1	1

Dimensions


CGJ2, CM2, CQ2 series: Same as standard*1

*1 The dimensions of the series shown above are the same as those of the standard type. For details, refer to the **Web Catalog**.

* Refer to the following for the foot bracket and flange bracket of the CG1 series.

CG1 Series

Foot bracket

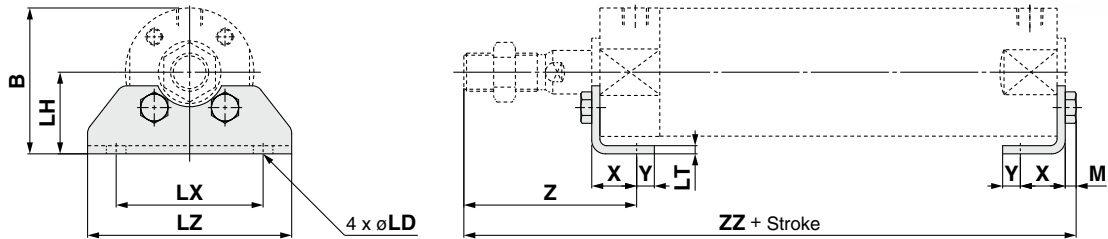


Bore size	B	LD	LH	LT	LX	LZ	M	X	Y	Z	ZZ
32	44	7.2	[25]	[3]	[44]	60	[3.5]	[16]	6	[53]	[117.5 (125.5)]
40	53.5	7.2	[30]	[3]	[54]	75	[4]	[16.5]	6.5	[63.5]	[135 (144)]
50	69	[10]	[40]	4	[66]	90	5.5	21.5	11.5	[75.5]	[157.5 (169.5)]
63	81	[12]	[45]	4	[82]	110	7	21.5	11.5	[75.5]	159 (171)
80	99.5	12	[55]	4	[100]	130	7	28	17	[95]	190 (204)
100	125	[14]	[70]	[6]	[120]	160	8	[30]	15	[95]	193 (207)

* []: Same as the standard type

(): Denotes the dimensions for long strokes

Flange bracket

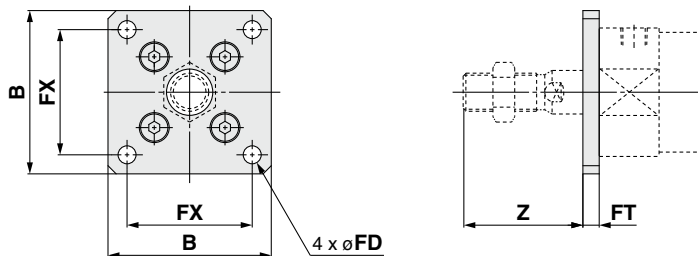

Bore size	B	FD	FT	FX	Z
32	50	[6.6]	6	[38]	34
40	60	[6.6]	6	[46]	44
50	75	[9]	[9]	[58]	[49]
63	90	[11]	[9]	[70]	[49]
80	100	[11]	9	[82]	62
100	125	[14]	10	[100]	61

* []: Same as the standard type

Made to Order: Common Specifications

■Made of stainless steel: XC6

The piston rod and rod end nut have been changed to the stainless steel specification.

CM2 – XC6

CG1 – XC6


CQ2 – XC6

■External stainless steel cylinder: XB12

External parts have been changed to the stainless steel specification.

CM2 – XB12

* Refer to the **Web Catalog** for details on the stainless steel (XC6) and external stainless steel cylinder (XB12) specifications.

 Safety Instructions	Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.
----------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------